

25 A GLASS PASSIVATED BRIDGE RECTIFIER
Reverse Voltage - 100 to 1200 V
Forward Current – 25 A
FEATURES

- ◆ High current capability
- ◆ Low forward voltage drop
- ◆ Glass Passivated Chip Junction
- ◆ Low power loss, high efficiency
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives


MECHANICAL DATA

- ◆ Case: GBPC
- ◆ Polarity: Symbol marked on body
- ◆ Mounting position: Any


Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	GBPC 2501	GBPC 2502	GBPC 2504	GBPC 2506	GBPC 2508	GBPC 2510	GBPC 2512	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	1200	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	1140	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	1200	V
Maximum Average Forward Rectified Current @ $T_c=55^\circ C$	$I_{(AV)}$	25							A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	350							A
Forward Voltage per element @ $I_F = 12.5A$ and $25^\circ C$	V_F	1.1							V
Maximum DC Reverse Current @ $T_j=25^\circ C$ at Rated DC Blocking Voltage @ $T_j=125^\circ C$	I_R	$\frac{5}{500}$ μA							μA
I^2t Rating for Fusing(3ms≤t≤8.3ms)	I^2t	508.4							A^2S
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150							°C

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) Thermal Resistance Junction to Case, Lead and Ambient.

Fig. 1 - Forward Current Derating Curve

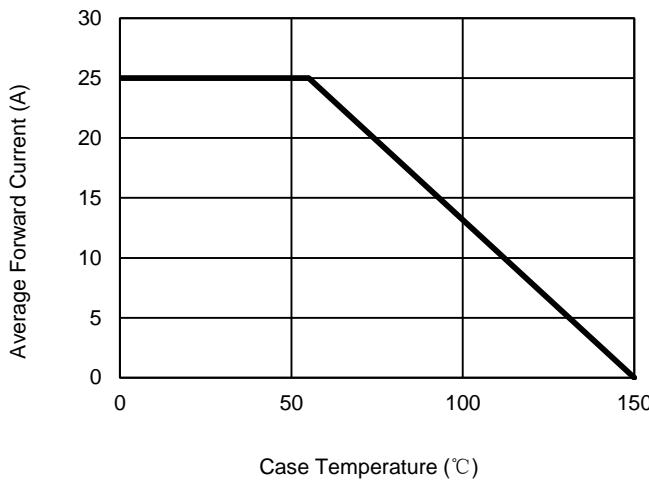


Fig. 2 - Maximum Non-Repetitive Surge Current

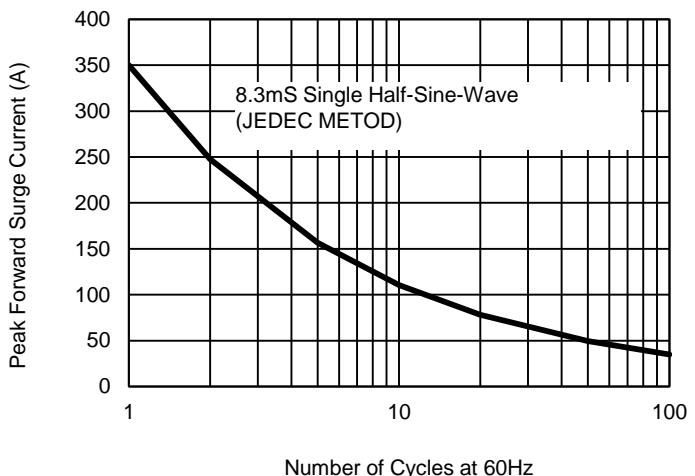


Fig. 3 - Typical Reverse Characteristics



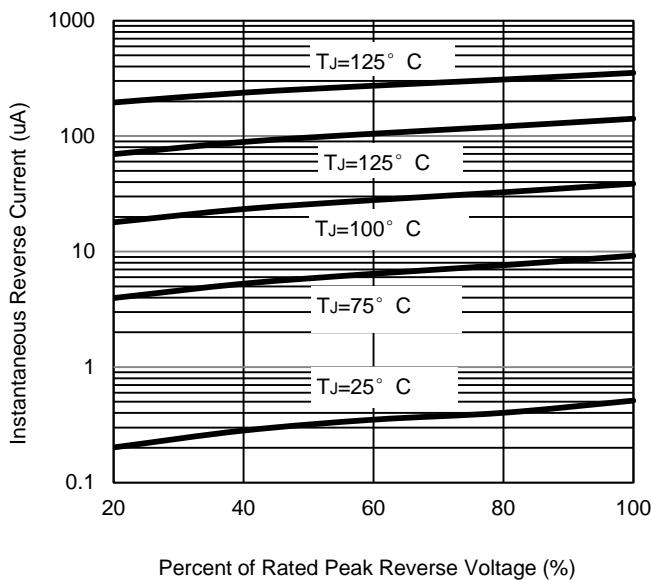


Fig. 4 - Typical Forward Characteristics

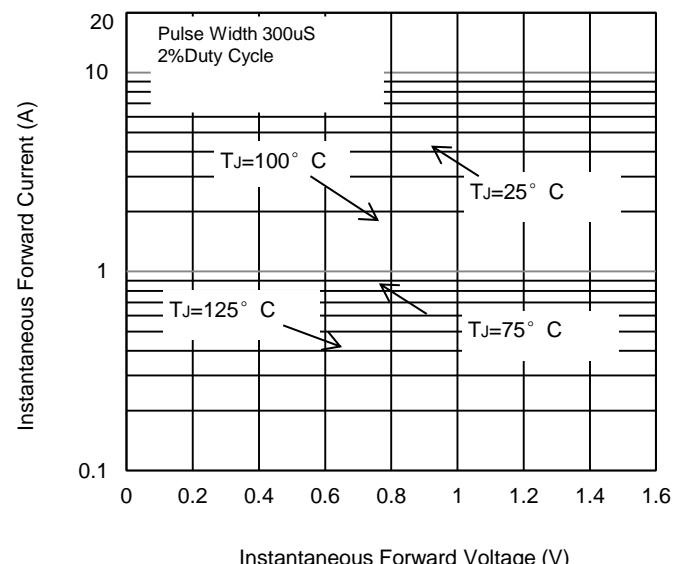

Package Outline

GBPC

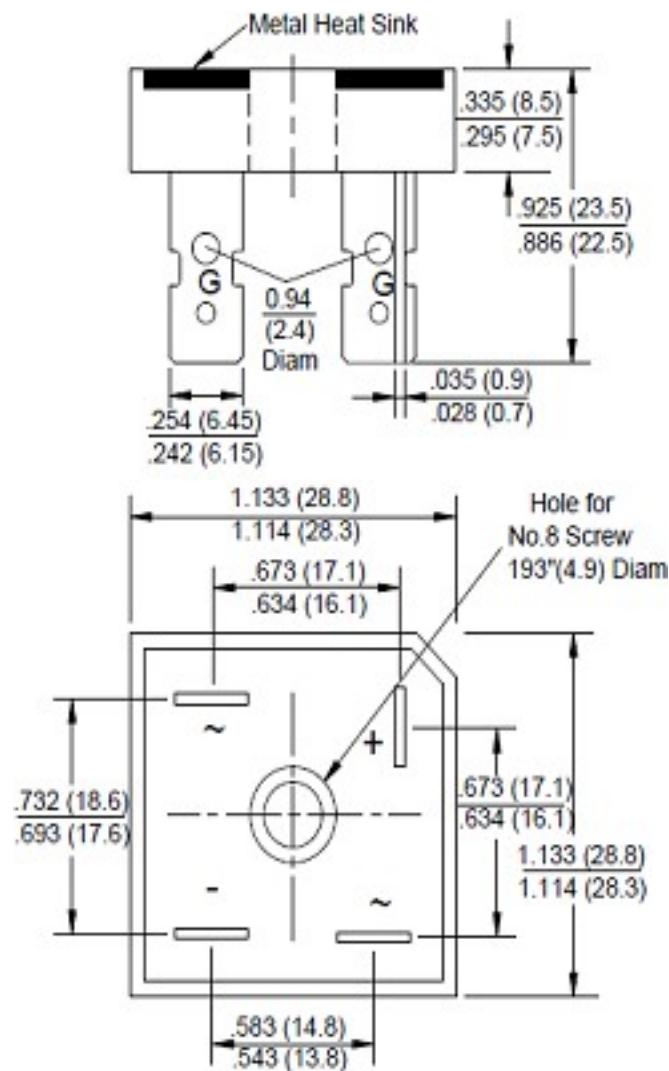

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
GBPC	BOX	50	EIA-481-1