

图号	图名	设计/审核	日期
2016-03-12			

规格说明: Specifications:
电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:



1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
U1 94V-0 LCP White/Black
2. 端子: Contact: Copper Alloy C5191
3. 外壳: Shell: Copper Alloy


电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
半金 锡 1U
2. 外壳: Shell:
Nickel Plating

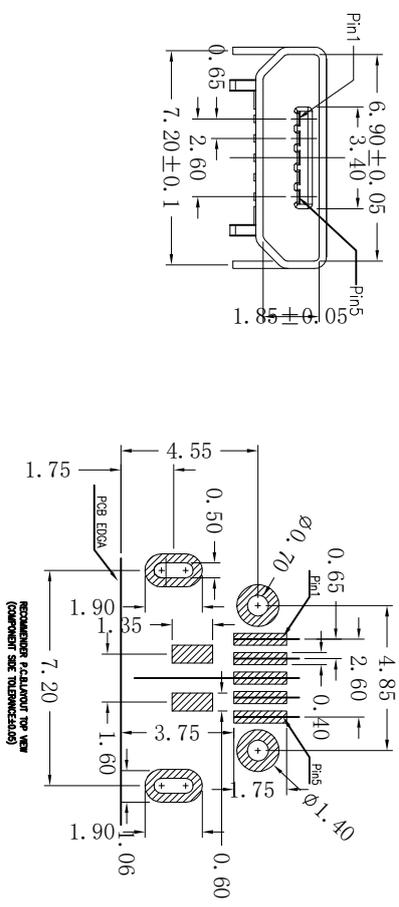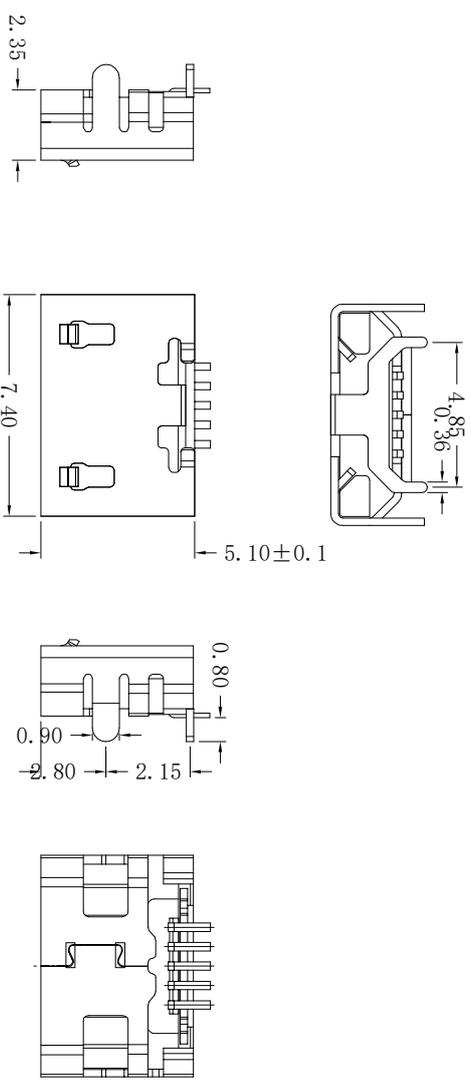

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co., LTD
电话: 0755-23304126 传真: 0755-29940187

UNLESS OTHERWISE SPECIFIED
公差参数表



TITLE: MICRO小牛角平口铜壳穿锡针长
产品名称: 1.5

APPD:	核准:	CHECK:	DRAW:	DATE	SCALE	UNIT	CODE	NUMBER				
X.X	±0.30	X.X'	±3°	APPD:	核准:	CHECK:	DRAW:	DATE	SCALE	UNIT	CODE	NUMBER
X.XX	±0.20	X.XX'	±2°	X.XXX	±1°	2016-03-12	1:1	mm	A001			