

Dimensions in inches and (millimeters)

## Features

- ✧ Epitaxial planar die construction
- ✧ Ideal for low power amplification and switching

MARKING:K3N


## MAXIMUM RATINGS( $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
$V_{CBO}$	Collector-Base Voltage	-40	V
$V_{CEO}$	Collector-Emitter Voltage	-40	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current -Continuous	-0.2	A
$P_C$	Collector Power Dissipation	0.2	W
$R_{\theta JA}$	Thermal Resistance. Junction to Ambient Air	625	$^{\circ}\text{C}/\text{W}$
$T_J$	Junction Temperature	150	$^{\circ}\text{C}$
$T_{stg}$	Storage Temperature	-55-150	$^{\circ}\text{C}$


## ELECTRICAL CHARACTERISTICS( $T_{amb}=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-10\mu\text{A}, I_E=0$	-40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=-1\text{mA}, I_B=0$	-40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-10\mu\text{A}, I_C=0$	-5			V
Collector cut-off current	$I_{CEX}$	$V_{CE}=-30\text{V}, V_{EB(OFF)}=-3\text{V}$			-50	nA
Base cut-off current	$I_{EBO}$	$V_{EB}=-5\text{V}, I_C=0$			-50	nA
DC current gain	$h_{FE(1)}$	$V_{CE}=-1\text{V}, I_C=-0.1\text{mA}$	60			
	$h_{FE(2)}$	$V_{CE}=-1\text{V}, I_C=-1\text{mA}$	80			
	$h_{FE(3)}$	$V_{CE}=-1\text{V}, I_C=-10\text{mA}$	100		300	
	$h_{FE(4)}$	$V_{CE}=-1\text{V}, I_C=-50\text{mA}$	60			
	$h_{FE(5)}$	$V_{CE}=-1\text{V}, I_C=-100\text{mA}$	30			
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C=-10\text{mA}, I_B=-1\text{mA}$			-0.25	V
	$V_{CE(sat)2}$	$I_C=-50\text{mA}, I_B=-5\text{mA}$			-0.4	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C=-10\text{mA}, I_B=-1\text{mA}$	-0.65		-0.85	V
	$V_{BE(sat)2}$	$I_C=-50\text{mA}, I_B=-5\text{mA}$			-0.95	V
Transition frequency	$f_T$	$V_{CE}=-20\text{V}, I_C=-10\text{mA}, f=100\text{MHz}$	250			MHz
Collector output capacitance	$C_{ob}$	$V_{CB}=-5\text{V}, I_E=0, f=1\text{MHz}$			4.5	pF
Noise figure	NF	$V_{CE}=-5\text{V}, I_C=-0.1\text{mA}, f=1\text{kHz}, R_g=1\text{K}\Omega$			4	dB
Delay time	$t_d$	$V_{CC}=-3\text{V}, V_{BE}=0.5\text{V}$			35	nS
Rise time	$t_r$	$I_C=-10\text{mA}, I_{B1}=-I_{B2}=-1\text{mA}$			35	nS
Storage time	$t_s$	$V_{CC}=-3\text{V}, I_C=-10\text{mA}$			225	nS
Fall time	$t_f$	$I_{B1}=-I_{B2}=-1\text{mA}$			75	nS


### Typical characteristics

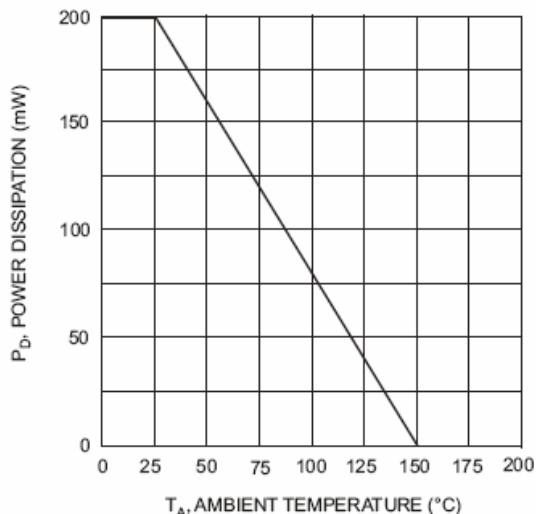


$T_A$ , AMBIENT TEMPERATURE ( $^{\circ}\text{C}$ )  
 Fig. 1, Max Power Dissipation vs Ambient Temperature

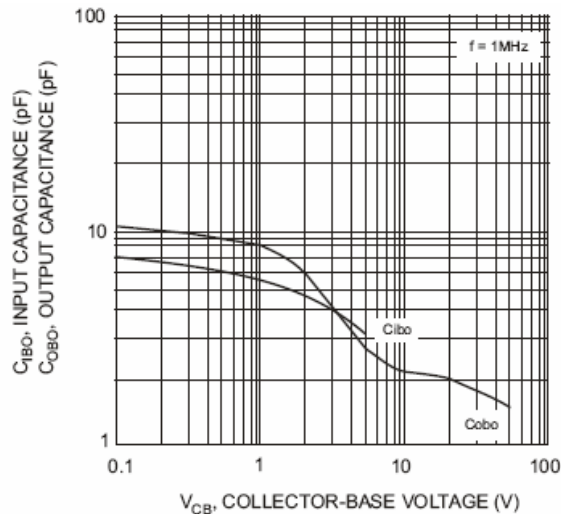


$V_{CB}$ , COLLECTOR-BASE VOLTAGE (V)  
 Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

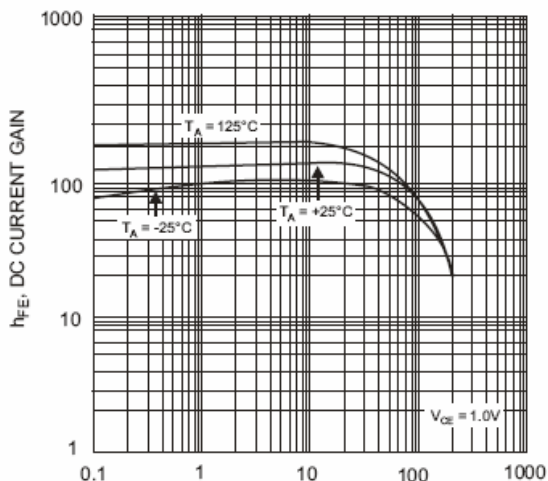

$I_C$ , COLLECTOR CURRENT (mA)  
 Fig. 3, Typical DC Current Gain vs Collector Current

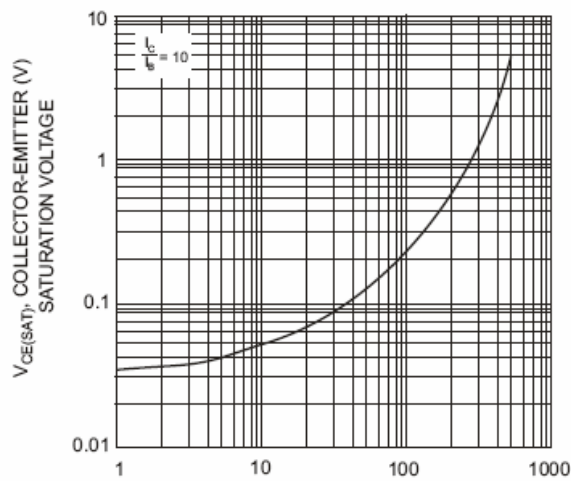

$I_C$ , COLLECTOR CURRENT (mA)  
 Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

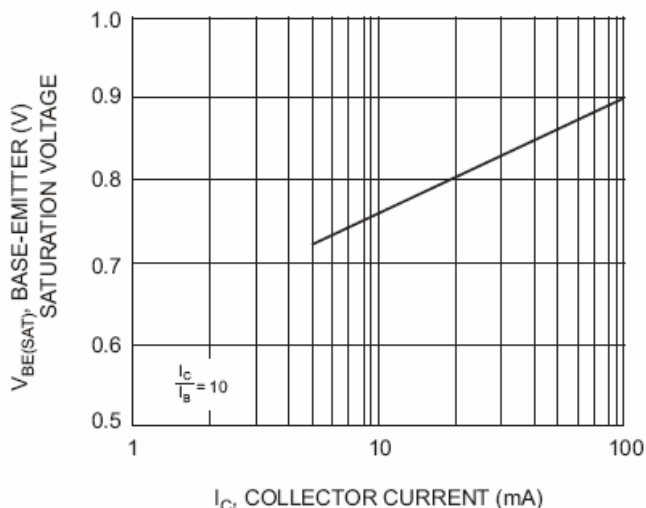

$I_C$ , COLLECTOR CURRENT (mA)  
 Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current