


### 3-Terminal Positive Voltage Regulator

#### FEATURES

- Maximum Output Current  $I_o$ : 0.15 A
- Output Voltage  $V_o$ : 5V/6V/8V/9V/10V/12V/15V/18V/20V/24V
- Continuous Total Dissipation  
 $P_D$ : 0.5 W ( $T_a = 25^\circ C$ )



1: OUT 2: GND 3: IN

SOT-89 PLASTIC PACKAGE


#### Absolute Maximum Ratings ( $T_a = 25^\circ C$ )

Parameter	Symbol	Rating	Unit
Input Voltage	$V_I$	30	V
78L18~78L24	40		
Output Current	$I_o$	150	mA
Power Dissipation	$P_{tot}$	500 (1)	mW
Operating Temperature	$T_{opr}$	-40 to +85	°C
Junction Temperature Range	$T_J$	-40 to +125	°C
Storage Temperature Range	$T_{stg}$	-55 to +150	°C

(1) Device is installed in the heat dissipation good environment


#### 78L05 Electrical Characteristics ( $T_a = 25^\circ C$ ) (Unless otherwise specified, $V_I = 10 V$ , $I_o = 40 mA$ , $C_1 = 0.33 \mu F$ , $C_0 = 0.1 \mu F$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_o$	$T_J = 25^\circ C$	4.75	5	5.25	V
78L05~78L15		$7 V \leq V_I \leq 20 V$ , $1 mA \leq I_O \leq 40 mA$	4.65	5	5.35	V
Voltage Regulation	$S_v$	$7 V \leq V_I \leq 20 V$ , $T_J = 25^\circ C$	--	--	150	mV
78L18~78L24		$8 V \leq V_I \leq 20 V$ , $T_J = 25^\circ C$	--	--	100	
Current Regulation	$S_I$	$1 mA \leq I_O \leq 100 mA$ , $T_J = 25^\circ C$	--	--	60	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ C$	--	--	6	mA
Quiescent Current Change	$\Delta I_Q$	$8 V \leq V_I \leq 20 V$	--	--	1.5	mA
78L05~78L15		$1 mA \leq I_O \leq 40 mA$	--	--	0.1	
Ripple Rejection	$S_{rip}$	$f = 120 Hz$ , $8 V \leq V_I \leq 18 V$ , $T_J = 25^\circ C$	--	49	--	dB
Dropout Voltage	$V_{Drop}$	$T_J = 25^\circ C$	--	1.7	--	V

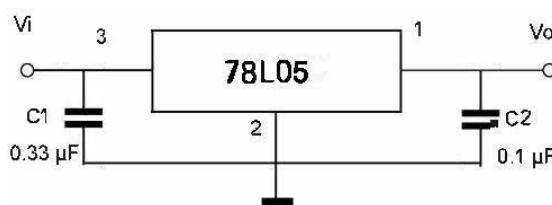


**78L06 Electrical Characteristics ( $T_a = 25^\circ C$ )** (Unless otherwise specified,  $V_I = 10 V$ ,  $I_O = 40 mA$ ,  $C_1 = 0.33 \mu F$ ,  $C_0 = 0.1 \mu F$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_o$	$T_j = 25^\circ C$	5.70	6	6.30	V
		$8.1 V \leq V_I \leq 21 V$ , $1 mA \leq I_O \leq 40 mA$	5.58	6	6.42	V
Voltage Regulation	$S_v$	$8.1 V \leq V_I \leq 21 V$ , $T_j = 25^\circ C$	--	--	150	mV
		$9 V \leq V_I \leq 21 V$ , $T_j = 25^\circ C$	--	--	110	
Current Regulation	$S_I$	$1 mA \leq I_O \leq 100 mA$ , $T_j = 25^\circ C$	--	--	70	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6	mA
Quiescent Current Change	$\Delta I_Q$	$9 V \leq V_I \leq 21 V$	--	--	1.5	mA
		$1 mA \leq I_O \leq 40 mA$	--	--	0.1	
Ripple Rejection	$S_{rip}$	$f = 120 Hz$ , $9 V \leq V_I \leq 19 V$ , $T_j = 25^\circ C$	--	47	--	dB
Dropout Voltage	$V_{Drop}$	$T_j = 25^\circ C$	--	1.7	--	V

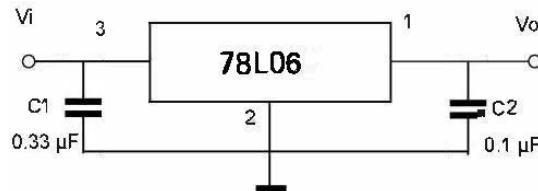

**78L08 Electrical Characteristics ( $T_a = 25^\circ C$ )** (Unless otherwise specified,  $0 \leq T_j \leq +125^\circ C$ ,  $V_I=14V$ ,  $I_O=40mA$ ,  $C_1=0.33\mu F$ ,  $C_0=0.1\mu F$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_o$	$T_j = 25^\circ C$	7.60	8	8.40	V
		$10.5 V \leq V_I \leq 23 V$ , $1 mA \leq I_O \leq 40 mA$	7.44	8	8.56	V
Voltage Regulation	$S_v$	$10.5 V \leq V_I \leq 23 V$ , $T_j = 25^\circ C$	--	--	175	mV
		$11 V \leq V_I \leq 23 V$ , $T_j = 25^\circ C$	--	--	125	
Current Regulation	$S_I$	$1 mA \leq I_O \leq 100 mA$ , $T_j = 25^\circ C$	--	--	80	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$11 V \leq V_I \leq 23 V$	--	--	1.5	mA
		$1 mA \leq I_O \leq 40 mA$	--	--	0.1	
Ripple Rejection	$S_{rip}$	$f = 120 Hz$ , $12 V \leq V_I \leq 23 V$ , $T_j = 25^\circ C$	--	45	--	dB
Dropout Voltage	$V_{Drop}$	$T_j = 25^\circ C$	--	1.7	--	V

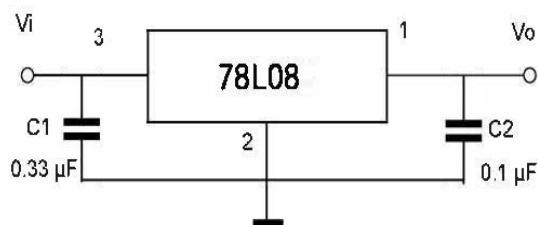


**78L09 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )** (Unless otherwise specified:  $0 \leqslant T_J \leqslant +125^\circ\text{C}$ ,  $V_I = 15\text{V}$ ,  $I_O = 40\text{mA}$ ,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = 25^\circ\text{C}$	8.55	9	9.45	V
		$11.4\text{ V} \leq V_I \leq 24\text{ V}, 1\text{ mA} \leq I_O \leq 40\text{ mA}$	8.37	9	9.63	V
Voltage Regulation	$S_V$	$11.4\text{ V} \leq V_I \leq 24\text{ V}, T_J = 25^\circ\text{C}$	--	--	200	mV
		$12\text{ V} \leq V_I \leq 24\text{ V}, T_J = 25^\circ\text{C}$	--	--	160	
Current Regulation	$S_I$	$1\text{ mA} \leq I_O \leq 100\text{ mA}, T_J = 25^\circ\text{C}$	--	--	90	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$12\text{ V} \leq V_I \leq 24\text{ V}$	--	--	1.5	mA
		$1\text{ mA} \leq I_O \leq 40\text{ mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{ Hz}, 12\text{ V} \leq V_I \leq 24\text{ V}, T_J = 25^\circ\text{C}$	--	44	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_J = 25^\circ\text{C}$	--	1.7	--	V

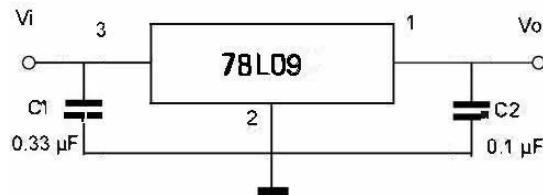


**78L10 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )** (Unless otherwise specified:  $0 \leqslant T_J \leqslant +125^\circ\text{C}$ ,  $V_I = 16\text{V}$ ,  $I_O = 40\text{mA}$ ,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = 25^\circ\text{C}$	9.50	10	10.50	V
		$12.5\text{ V} \leq V_I \leq 25\text{ V}, 1\text{ mA} \leq I_O \leq 40\text{ mA}$	9.30	10	10.70	V
Voltage Regulation	$S_V$	$12.5\text{ V} \leq V_I \leq 25\text{ V}, T_J = 25^\circ\text{C}$	--	--	230	mV
		$13\text{ V} \leq V_I \leq 25\text{ V}, T_J = 25^\circ\text{C}$	--	--	170	
Current Regulation	$S_I$	$1\text{ mA} \leq I_O \leq 100\text{ mA}, T_J = 25^\circ\text{C}$	--	--	90	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$13\text{ V} \leq V_I \leq 25$	--	--	1.5	mA
		$1\text{ mA} \leq I_O \leq 40\text{ mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{ Hz}, 13\text{ V} \leq V_I \leq 24\text{ V}, T_J = 25^\circ\text{C}$	--	43	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_J = 25^\circ\text{C}$	--	1.7	--	V

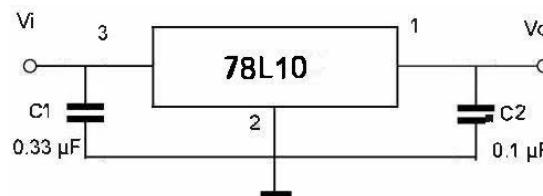


**78L12 Electrical Characteristics ( $T_a = 25^\circ C$ )** (Unless otherwise specified:  $0 \leq T_J \leq +125^\circ C$ ,  $V_I = 19V$ ,  $I_O = 40mA$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25°C	11.40	12	12.60	V
		14.5 V ≤ V <sub>I</sub> ≤ 27 V, 1 mA ≤ I <sub>O</sub> ≤ 40 mA	11.16	12	12.84	V
Voltage Regulation	S <sub>V</sub>	14.5 V ≤ V <sub>I</sub> ≤ 27 V, T <sub>j</sub> = 25°C	--	--	250	mV
		16 V ≤ V <sub>I</sub> ≤ 27 V, T <sub>j</sub> = 25°C	--	--	200	
Current Regulation	S <sub>I</sub>	1 mA ≤ I <sub>O</sub> ≤ 100 mA, T <sub>j</sub> = 25°C	--	--	100	mV
Quiescent Current	I <sub>Q</sub>	T <sub>j</sub> = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI <sub>Q</sub>	16 V ≤ V <sub>I</sub> ≤ 27 V	--	--	1.5	mA
		1 mA ≤ I <sub>O</sub> ≤ 40 mA	--	--	0.1	
Ripple Rejection	S <sub>rip</sub>	f = 120 Hz, 15 V ≤ V <sub>I</sub> ≤ 25V, T <sub>j</sub> = 25°C	--	43	--	dB
Dropout Voltage	V <sub>Drop</sub>	T <sub>j</sub> = 25°C	--	1.7	--	V

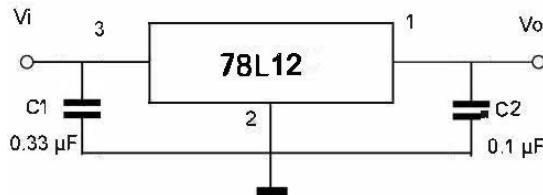

**78L15 Electrical Characteristics ( $T_a = 25^\circ C$ )** (Unless otherwise specified:  $0 \leq T_J \leq +125^\circ C$ ,  $V_I = 23V$ ,  $I_O = 40mA$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25°C	14.25	15	15.75	V
		17.5 V ≤ V <sub>I</sub> ≤ 30V, 1 mA ≤ I <sub>O</sub> ≤ 40 mA	13.95	15	16.05	V
Voltage Regulation	S <sub>V</sub>	17.5 V ≤ V <sub>I</sub> ≤ 30V, T <sub>j</sub> = 25°C	--	--	200	mV
		20 V ≤ V <sub>I</sub> ≤ 30V, T <sub>j</sub> = 25°C	--	--	250	
Current Regulation	S <sub>I</sub>	1 mA ≤ I <sub>O</sub> ≤ 100 mA, T <sub>j</sub> = 25°C	--	--	150	mV
Quiescent Current	I <sub>Q</sub>	T <sub>j</sub> = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI <sub>Q</sub>	20 V ≤ V <sub>I</sub> ≤ 30 V	--	--	1.5	mA
		1 mA ≤ I <sub>O</sub> ≤ 40 mA	--	--	0.1	
Ripple Rejection	S <sub>rip</sub>	f = 120 Hz, 18.5 V ≤ V <sub>I</sub> ≤ 28.5V, T <sub>j</sub> = 25°C	--	40	--	dB
Dropout Voltage	V <sub>Drop</sub>	T <sub>j</sub> = 25°C	--	1.7	--	V

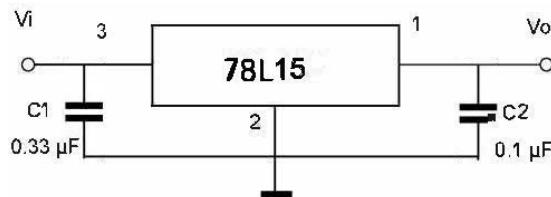


**78L18 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )** (Unless otherwise specified:  $0 \leqslant T_j \leqslant +125^\circ\text{C}$ ,  $V_I = 27\text{V}$ ,  $I_O = 40\text{mA}$ ,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_j = 25^\circ\text{C}$	17.10	18	18.90	V
		$21.4\text{ V} \leq V_I \leq 33\text{V}, 1\text{ mA} \leq I_O \leq 40\text{ mA}$	16.74	18	19.26	V
Voltage Regulation	$S_V$	$21.4\text{ V} \leq V_I \leq 33\text{V}, T_j = 25^\circ\text{C}$	--	--	325	mV
		$22\text{ V} \leq V_I \leq 33\text{V}, T_j = 25^\circ\text{C}$	--	--	275	
Current Regulation	$S_I$	$1\text{ mA} \leq I_O \leq 100\text{ mA}, T_j = 25^\circ\text{C}$	--	--	170	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$22\text{ V} \leq V_I \leq 33\text{V}$	--	--	1.5	mA
		$1\text{ mA} \leq I_O \leq 40\text{ mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{ Hz}, 23\text{ V} \leq V_I \leq 33\text{V}, T_j = 25^\circ\text{C}$	--	38	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

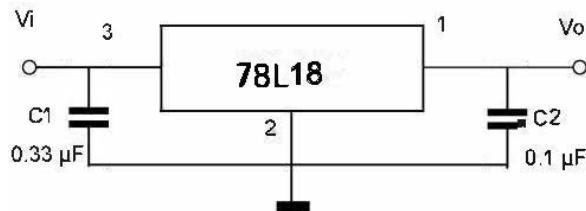

**78L20 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )** (Unless otherwise specified:  $0 \leqslant T_j \leqslant +125^\circ\text{C}$ ,  $V_I = 29\text{V}$ ,  $I_O = 40\text{mA}$ ,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_j = 25^\circ\text{C}$	19.0	20	21.0	V
		$23.5\text{ V} \leq V_I \leq 35\text{V}, 1\text{ mA} \leq I_O \leq 40\text{ mA}$	18.60	20	21.40	V
Voltage Regulation	$S_V$	$23.5\text{ V} \leq V_I \leq 35\text{V}, T_j = 25^\circ\text{C}$	--	--	330	mV
		$24\text{V} \leq V_I \leq 35\text{V}, T_j = 25^\circ\text{C}$	--	--	285	
Current Regulation	$S_I$	$1\text{ mA} \leq I_O \leq 100\text{ mA}, T_j = 25^\circ\text{C}$	--	--	180	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$24\text{V} \leq V_I \leq 35\text{V}$	--	--	1.5	mA
		$1\text{ mA} \leq I_O \leq 40\text{ mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{ Hz}, 25\text{V} \leq V_I \leq 35\text{V}, T_j = 25^\circ\text{C}$	--	37	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

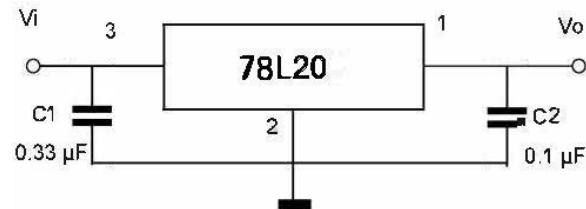

**78L24 Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )** (Unless otherwise specified:  $0 \leq T_j \leq +125^\circ\text{C}$ ,  $V_i = 33\text{V}$ ,  $I_o = 40\text{mA}$ ,  $C_l = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_o$	$T_j = 25^\circ\text{C}$	22.80	24	25.20	V
		$27.5 \leq V_i \leq 38\text{V}$ , $1\text{ mA} \leq I_o \leq 40\text{ mA}$	22.32	24	25.68	V
Voltage Regulation	$S_v$	$27.5 \leq V_i \leq 38\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	350	mV
		$28\text{V} \leq V_i \leq 38\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	300	
Current Regulation	$S_I$	$1\text{ mA} \leq I_o \leq 100\text{ mA}$ , $T_j = 25^\circ\text{C}$	--	--	200	mV
Quiescent Current	$I_Q$	$T_j = 25^\circ\text{C}$	--	--	6.5	mA
Quiescent Current Change	$\Delta I_Q$	$28\text{V} \leq V_i \leq 38\text{V}$	--	--	1.5	mA
		$1\text{ mA} \leq I_o \leq 40\text{ mA}$	--	--	0.1	
Ripple Rejection	$S_{\text{rip}}$	$f = 120\text{ Hz}$ , $29\text{V} \leq V_i \leq 39\text{V}$ , $T_j = 25^\circ\text{C}$	--	35	--	dB
Dropout Voltage	$V_{\text{Drop}}$	$T_j = 25^\circ\text{C}$	--	1.7	--	V

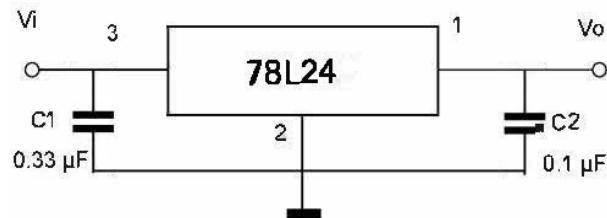

#### Electrical characteristic curve

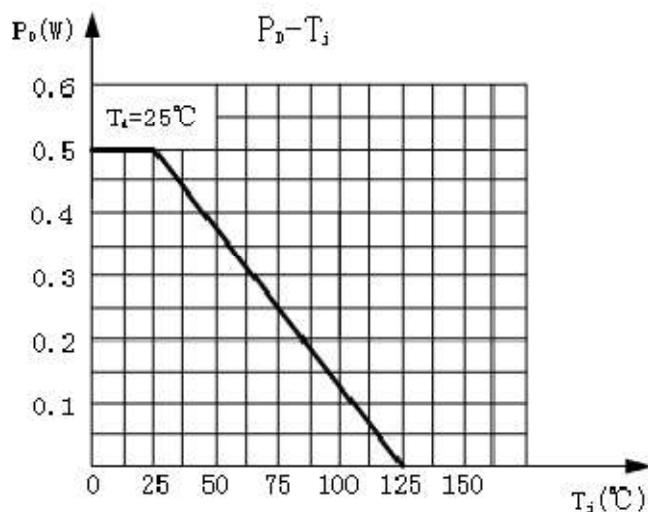


Figure 1: dissipation power relationship with the temperature curve


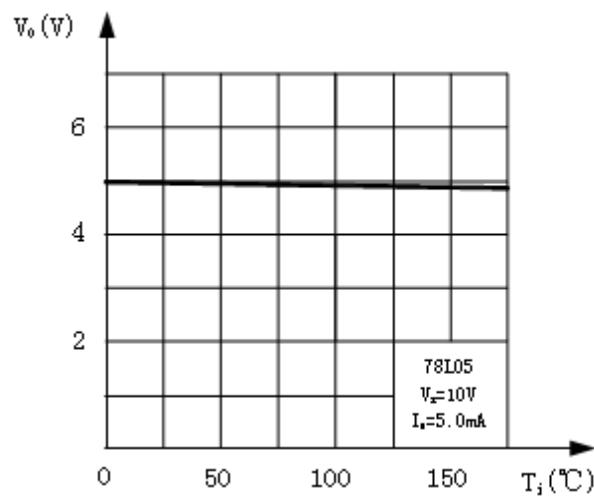


Figure 2 output voltage and junction temperature curve

### Outline Dimension

Unit: mm

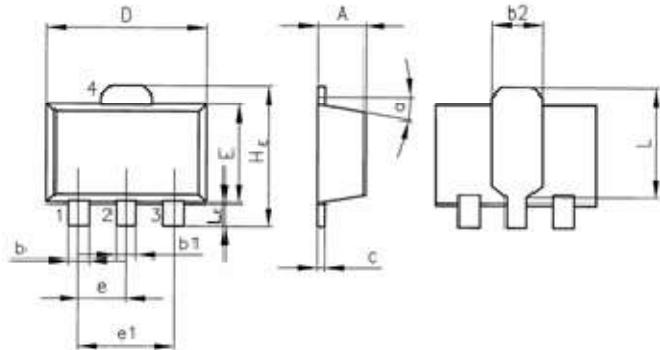

SOT-89			
Symbol	min	typ	max
A	1.4	---	1.6
b	0.35	---	0.55
b1	0.4	---	0.65
b2	---	1.6	---
c	0.35	---	0.45
D	4.4	---	4.6
E	2.35	---	2.55
e	---	1.5	---
e1	---	3	---
HE	---	4.15	---
L	---	2.7	---
LE	---	1.0	---
a	---	5°	---