



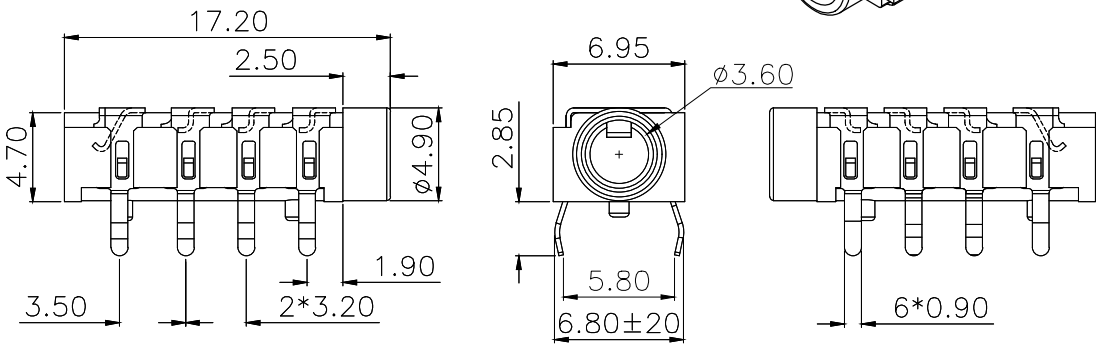

NOTES:
1. MATERIAL:
   1.1. HOUSING: PA46, COLOR IS BLACK;
   1.2. CONTACT: PHOSPHOR COPPER (C5191,T=0.25);
2. ELECTRICAL:
   2.1. VOLTAGE RATING: 30 VAC RMS;
   2.2. CURRENT RATING: 0.5 AMP;
   2.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   2.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;
   2.5. INSULATION RESISTANCE: 100MEGOHMS MIN @500V DC;
3. MECHANICAL:
   3.1. MATING FORCE: 5~25N;
   3.2. UNMATING FORCE: 5~25N;
   3.3. OPERATING LIFE: 5000 CYCLES;
4. PLATING:
   4.1. TERMINAL:
   NI PLATING OVER ALL,
   TIN PLATING ON SOLDER AREA,
5. ENVIRONMENTAL:
   5.1. STORAGE TEMPERATURE RANGE: −40°C~+85°C;
   5.2. OPERATION TEMPERATURE RANGE: −25°C~+70°C;
6. SALT SPRAY TEST:8H(EXCLUDING RIVETED BENDS)

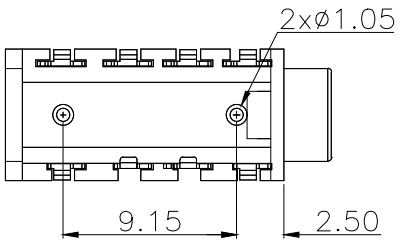

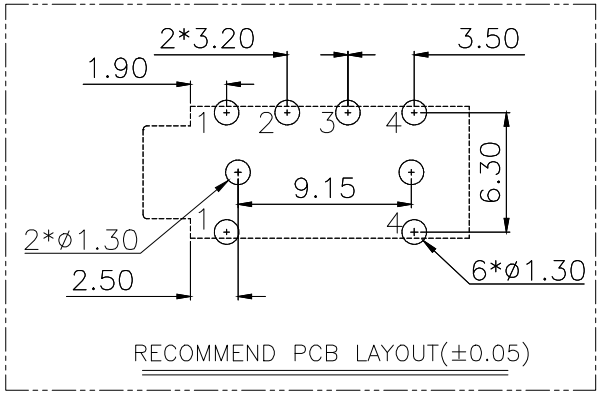

RECOMMEND PCB LAYOUT(±0.05)



电气性能

序号	品名	材质	电镀/颜色	备注
A	基座	PA46	黑色	
B	端子	C5191	焊区镀锡 全周镀镍	

			GENERL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	313耳机四节 弯脚6.8 黑色	版 本 REV. A
			X.XX ±0.20	比 例 SCALE				
1	初版发行		X.XXX ±0.10	投 影 Projection		产品料号 PART NO.	HC-PJ-3134-6P-D	单 位 UNITS mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°			材 料 MATERIAL		页 次 SHEET 1/1