
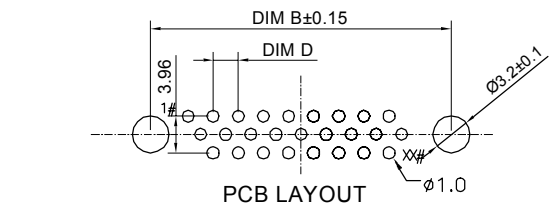


SPECIFICATIONS:
 Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:5000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C~+85°C

MATERIAL AND FINISH
 Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy, Nickel Undercoated Selective Gold Plated
 Shell:Metal Iron, With Tin Plated

PART NO.:
 Z-SUB HP * M * * 2 * * * *
 NO. OF CONTACTS
 B=15PIN
 D=26PIN
 F=44PIN
 D=62PIN
 MOUNTING OPTIONS
 1=RIVETED W/SHIELD ONLY
 2=RIVETED W/FRONT RIVET
 3=RIVETED W/REAR RIVET
 4=RIVETED W/NUT RIVET
 5=RIVETED W/HEX SCREW+HEX NUT
 NUT POST HEIGHT(H)
 0=4.8mm(STD)
 1=5.8mm
 LOGO
 0=NO LOGO
 2=NEXTRON
 INSULATOR COLOR
 0=BLACK
 6=BLUE
 9=WHITE
 INSULATOR MATERIAL
 0=PBT
 2=NYLON
 CONTACT PLATED:(CONTACT AREA)
 1=FULL GOLD 1u"
 2=GOLD 3u"
 3=GOLD 5u"
 4=GOLD 10u"
 5=GOLD 15u"
 6=GOLD 30u"
 CONTACT MATERIAL
 2=BRASS

62P	55.42	63.50	69.32	2.41	8.36	12.50
44P	38.96	47.04	53.04	2.29	8.36	12.50
26P	25.25	33.32	39.14	2.29	8.36	12.50
15P	16.92	24.99	30.81	2.29	8.36	12.50
POS. NO.	A	B	C	D	E	F
	DIMENSION					



C	ECR-20049	△=1	2020/03/27
B	ECN-19105	△=1	2019/11/15
A	NEW RELEASED		2016/07/16
REV.	DESCRIPTION	DATE	ANGLES
			X° ± 3°

UNITS: ■ mm □ inch	SIZE A3	NAME: D-SUB 焊接式 PCB 公端	 NEXTRONICS ENGINEERING CORP.		
GENERAL TOLERANCE: (UNLESS SPECIFIED)		PART NO: Z-SUBHPXMX2XXXX	TITLE: CUSTOMER DWG		
4 PLACE	± **	±. **	APPD: Linson 曾偉雄	2019/12/02	DWG NO: 010-0000-M86
3 PLACE	± **	±. **	CHKD: Linson 曾偉雄	2019/12/02	
2 PLACE	± 0.20	±. **	DRAW:		
1 PLACE	± 0.30	±. **	DESIGN: Lu 陳惠枝		
	X° ± 3°		SCALE	SHEET	REV.
			1/1	1/1	C