

HF series


- Long life, high ripple current; For power supply applications
- Endurance: +105°C 5,000~10,000 hours
- RoHS Compliant



SPECIFICATIONS


Items	Characteristics																													
Category Temperature Range	-25~+105°C																													
Rated Voltage Range	160~450 V _{dc}																													
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)																													
Leakage Current	<table border="1"> <tr> <td></td> <th colspan="2">After 1 minute</th> <th colspan="2">After 5 minutes</th> <td colspan="3"></td> </tr> <tr> <td>CV≤1000</td> <td>I≤0.1CV+40μA</td> <td>I≤0.03CV+15μA</td> <td colspan="2"></td> <td colspan="3"></td> </tr> <tr> <td>CV>1000</td> <td>I≤0.04CV+100μA</td> <td>I≤0.02CV+25μA</td> <td colspan="2"></td> <td colspan="3"></td> </tr> </table>				After 1 minute		After 5 minutes					CV≤1000	I≤0.1CV+40μA	I≤0.03CV+15μA						CV>1000	I≤0.04CV+100μA	I≤0.02CV+25μA						Where, I:Max.leakage current (μA), C:Nominal capacitance (μF), V: Rated voltage (V) (at 20°C)		
	After 1 minute		After 5 minutes																											
CV≤1000	I≤0.1CV+40μA	I≤0.03CV+15μA																												
CV>1000	I≤0.04CV+100μA	I≤0.02CV+25μA																												
Dissipation Factor (tanδ)	Rated Voltage(V _{dc})	160	200	250	350	400	450																							
	tanδ (max.)	0.15	0.15	0.15	0.20	0.20	0.20																							
Low Temperature Characteristics (Max. Impedance Ratio)	Rated Voltage(V _{dc})	160	200	250	350	400	450																							
	Z(-25°C)/Z(+20°C)	3	3	3	6	6	6																							
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after DC voltage plus the rated ripple current is applied for a specified period of time at 105°C.																													
	Capacitance Change	$\leq \pm 20\%$ of the initial value			Case Dia. Load life (hours)																									
	D.F. (tanδ)	$\leq 200\%$ of the initial specified value			$\varnothing D \leq 8$ 5,000																									
	Leakage Current	\leq The initial specified value			$\varnothing D = 10$ 8,000																									
					$\varnothing D \geq 12.5$ 10,000																									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.																													
	Capacitance Change	$\leq \pm 20\%$ of the initial value																												
	D.F. (tanδ)	$\leq 200\%$ of the initial specified value																												
	Leakage Current	$\leq 200\%$ of the initial specified value																												

DIMENSIONS[mm]

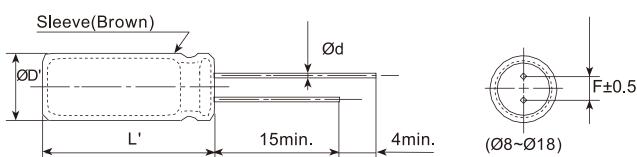

ØD	8	10	12.5	16	18
Ød	0.5	0.6	0.6	0.6	0.8
F	3.5	5.0	5.0	7.5	7.5
ØD'	$\varnothing D + 0.5$ max.				
L'	L+2max.				

PART NUMBERING SYSTEM

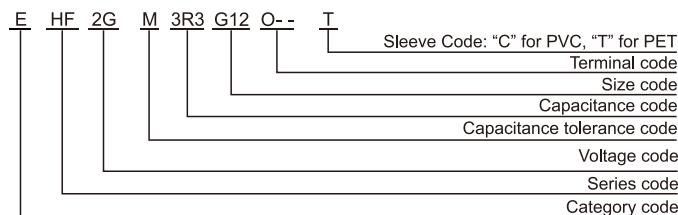

Radial Type

RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

Freq.(Hz) Cap.(μF)	120	1k	10k	100k
<100	1.0	1.75	2.25	2.50
≥100	1.0	1.67	2.05	2.25

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

HF series

■ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mArms/105°C, 120Hz)
160(2C)	10	10*16	0.15	128
	12	10*16	0.15	145
	15	10*20	0.15	175
	22	10*20	0.15	205
	33	10*20	0.15	250
	39	10*20	0.15	275
	47	10*20	0.15	300
	56	12.5*20	0.15	310
	68	12.5*20	0.15	350
	82	12.5*20	0.15	478
	100	12.5*25	0.15	510
	100	16*20	0.15	630
	150	16*20	0.15	635
	150	16*25	0.15	770
	220	16*25	0.15	790
	220	18*25	0.15	1020
	330	18*30	0.15	1045
	330	18*30	0.15	1402
200(2D)	10	10*16	0.15	126
	12	10*16	0.15	140
	15	10*20	0.15	170
	22	10*20	0.15	205
	33	10*20	0.15	255
	39	12.5*20	0.15	265
	47	12.5*20	0.15	310
	68	12.5*20	0.15	392
	68	12.5*25	0.15	470
	82	16*20	0.15	485
	100	16*20	0.15	554
	100	16*25	0.15	632
	150	16*25	0.15	655
	150	16*30	0.15	840
	18*25	0.15	865	
	220	18*25	0.15	870
	220	18*30	0.15	1050
	330	18*30	0.15	1080
	330	18*35	0.15	1430
	330	18*40	0.15	1460
250(2E)	4.7	8*12	0.15	70
	5.6	10*12	0.15	85
	6.8	10*12	0.15	110
	10	10*20	0.15	140
	22	10*20	0.15	205
	33	12.5*20	0.15	325
	39	12.5*20	0.15	345
	47	12.5*20	0.15	390
	68	12.5*25	0.15	405
	82	16*20	0.15	528
	82	16*20	0.15	550
	100	16*30	0.15	570
	100	16*25	0.15	680
	150	18*25	0.15	700
	150	18*31	0.15	866
	220	18*31	0.15	1130
	220	18*40	0.15	1160

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mArms/105°C, 120Hz)
350(2V)	4.7	10*12	0.20	70
	5.6	10*12	0.20	90
	6.8	10*16	0.20	112
	10	10*20	0.20	140
	22	12.5*20	0.20	265
	33	16*20	0.20	364
	39	16*20	0.20	385
	47	16*20	0.20	430
	68	16*25	0.20	445
	82	18*20	0.20	560
	82	18*25	0.20	550
	100	18*25	0.20	618
	120	18*30	0.20	700
	150	18*30	0.20	725
	150	18*35	0.20	836
	150	18*35	0.20	970
	1	8*12	0.20	30
	2.2	8*12	0.20	45
400(2G)	3.3	10*12	0.20	80
	4.7	10*16	0.20	100
	6.8	10*16	0.20	112
	10	10*20	0.20	144
	15	12.5*20	0.20	222
	22	12.5*20	0.20	260
	33	16*20	0.20	368
	39	16*25	0.20	410
	47	16*25	0.20	470
	68	18*20	0.20	455
	82	16*30	0.20	480
	56	10*50	0.20	520
	68	12.5*40	0.20	600
	82	18*25	0.20	625
	100	18*30	0.20	610
	100	12.5*45	0.20	630
	150	18*31	0.20	790
	150	18*35	0.20	765
	150	18*40	0.20	785
450(2W)	120	18*35	0.20	870
	150	18*40	0.20	985
	6.8	10*20	0.20	112
	10	12.5*20	0.20	185
	15	12.5*25	0.20	248
	22	16*20	0.20	295
	33	10*40	0.20	405
	33	16*25	0.20	398
	47	18*20	0.20	385
	39	10*45	0.20	425
	39	18*25	0.20	415
	47	12.5*40	0.20	505
	56	18*25	0.20	496
	68	18*30	0.20	550
	82	12.5*50	0.20	640
	82	18*35	0.20	730
	100	18*40	0.20	808