

UP0.4C

Unshielded drum core power inductors



Product description

- Protective case over core and winding
- Frequency range 1 kHz to 2 MHz
- Inductance range from 1.2 μ H to 100 μ H
- Current range from 0.35 A to 3.33 A
- 6.6 mm x 4.45 mm footprint surface mount package in a 2.92 mm height
- Ferrite core material
- Lead free and RoHS compliant

Applications

- Handheld/portable devices
- Computers and peripherals
- Gaming machines/consoles
- DC-DC converters
- Power supplies
- General purpose filtering

Environmental Data

- Storage temperature range (component): -40 °C to +125 °C
- Operating temperature range: -40 °C to +125 °C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant



Product Specifications

Part Number ⁴	Ordering Code ⁵	OCL ¹ (μH) ± 20%	I _{rms} ² (A)	Isat ³ (A)	DCR (Ω) maximum @ 20 °C
UP0.4C-1R0-R	UP0-4C-1R0-R	1.16	2.88	3.33	0.030
UP0.4C-1R5-R	UP0-4C-1R5-R	1.49	2.58	2.94	0.034
UP0.4C-2R2-R	UP0-4C-2R2-R	2.27	2.15	2.38	0.050
UP0.4C-3R3-R	UP0-4C-3R3-R	3.22	1.89	2.00	0.060
UP0.4C-4R7-R	UP0-4C-4R7-R	4.95	1.55	1.61	0.088
UP0.4C-6R8-R	UP0-4C-6R8-R	7.06	1.30	1.35	0.128
UP0.4C-100-R	UP0-4C-100-R	9.53	1.16	1.16	0.156
UP0.4C-150-R	UP0-4C-150-R	14.5	0.95	0.94	0.250
UP0.4C-220-R	UP0-4C-220-R	21.8	0.76	0.77	0.360
UP0.4C-270-R	UP0-4C-270-R	27.5	0.69	0.68	0.480
UP0.4C-330-R	UP0-4C-330-R	32.2	0.64	0.63	0.560
UP0.4C-390-R	UP0-4C-390-R	39.0	0.59	0.57	0.650
UP0.4C-470-R	UP0-4C-470-R	46.5	0.53	0.53	0.820
UP0.4C-680-R	UP0-4C-680-R	68.2	0.45	0.43	1.10
UP0.4C-101-R	UP0-4C-101-R	102.5	0.37	0.35	1.58

1. Open Circuit Inductance (OCL) Test Parameters: 100 kHz, 0.250 Vrms, 0.0 Adc

2. I_{rms}: DC current for an approximate temperature rise of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125 °C under worst case operating conditions verified in the end application.

3. Peak current for approximately 30% roll-off @ 20 °C

4 Part Number Definition: UP0.4C-xxx-R



UP0.4C= Product code and size

xxx= Inductance value in μH, R= decimal point, if no R is present then last character equals number of zeros


-R suffix = RoHS compliant

5. Use ordering code when ordering parts.

Dimensions (mm)

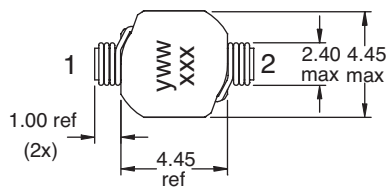

RECOMMENDED PCB LAYOUT



SCHEMATIC




Part marking: yww= date code, xxx=inductance value in uH, R=decimal point, if no R is present then last character equals number of zeros.

Supplied in tape and reel packaging 2,500 parts per reel

Do not route traces or vias underneath the inductor

Inductance characteristics

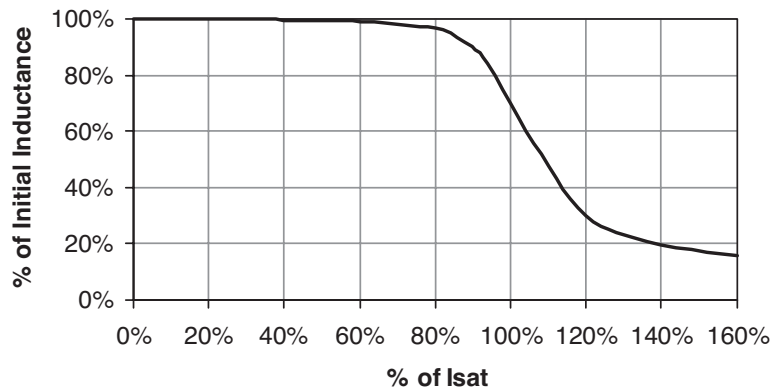

Solder reflow profile

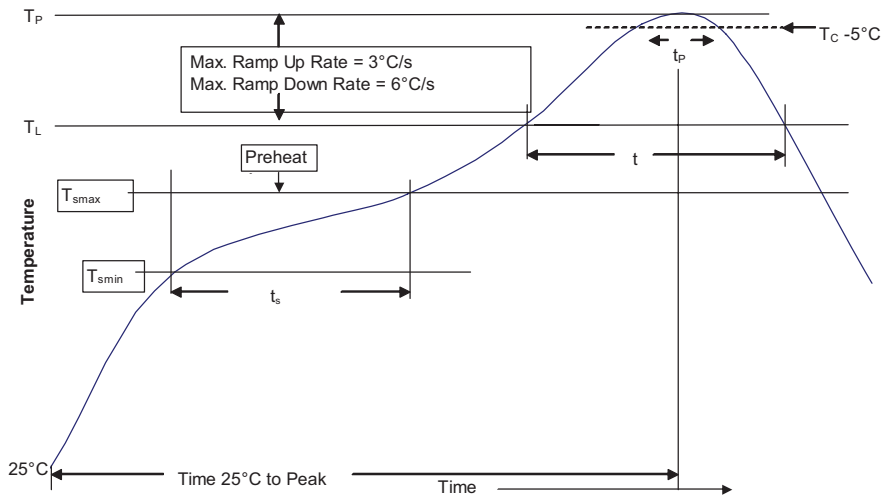


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm)	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JEDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T _{smin})	100°C	150°C
• Temperature max. (T _{smax})	150°C	200°C
• Time (T _{smin} to T _{smax}) (t _s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T _{smax} to T _p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T _L)	183°C	217°C
Time at liquidous (t _L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T _p)*	Table 1	Table 2
Time (t _p)** within 5 °C of the specified classification temperature (T _C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T _p to T _{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.
** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/elx

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 4107
January 2016



Eaton is a registered trademark.
All other trademarks are property of their respective owners.