


技术参数 SPECIFICATIONS

- 线数 (Poles) : 1、2、3、4、6、8、12
- 适用线规 (Applicable wires) : AWG18# ~14#
- 适应基板厚度 (Applicable PC board thickness) : 0.8~2.0mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 20A max
- 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 2000V.Ac/1min
- 材料 (Material) :
 - 插头 (Plug housing) : 尼龙 (PA66) UL94V-2(0)
 - 插座 (Receptacle housing) : 尼龙 (PA66) UL94V-2(0)
 - 插片 (Retainer) : 尼龙 (PA66) UL94V-2(0)
 - 针座 (Wafer) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

端子 TERMINAL(VLP/VLR)

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm	材料厚度 Thickness	数量 Quantity
	mm ²	AWG#			
HX62007-PT	0.75~2.0	18~14	2.7~4.0	0.25	2000PCS/盘
HX62008-RT	0.75~2.0	18~14	2.7~4.0	0.25	2000PCS/盘

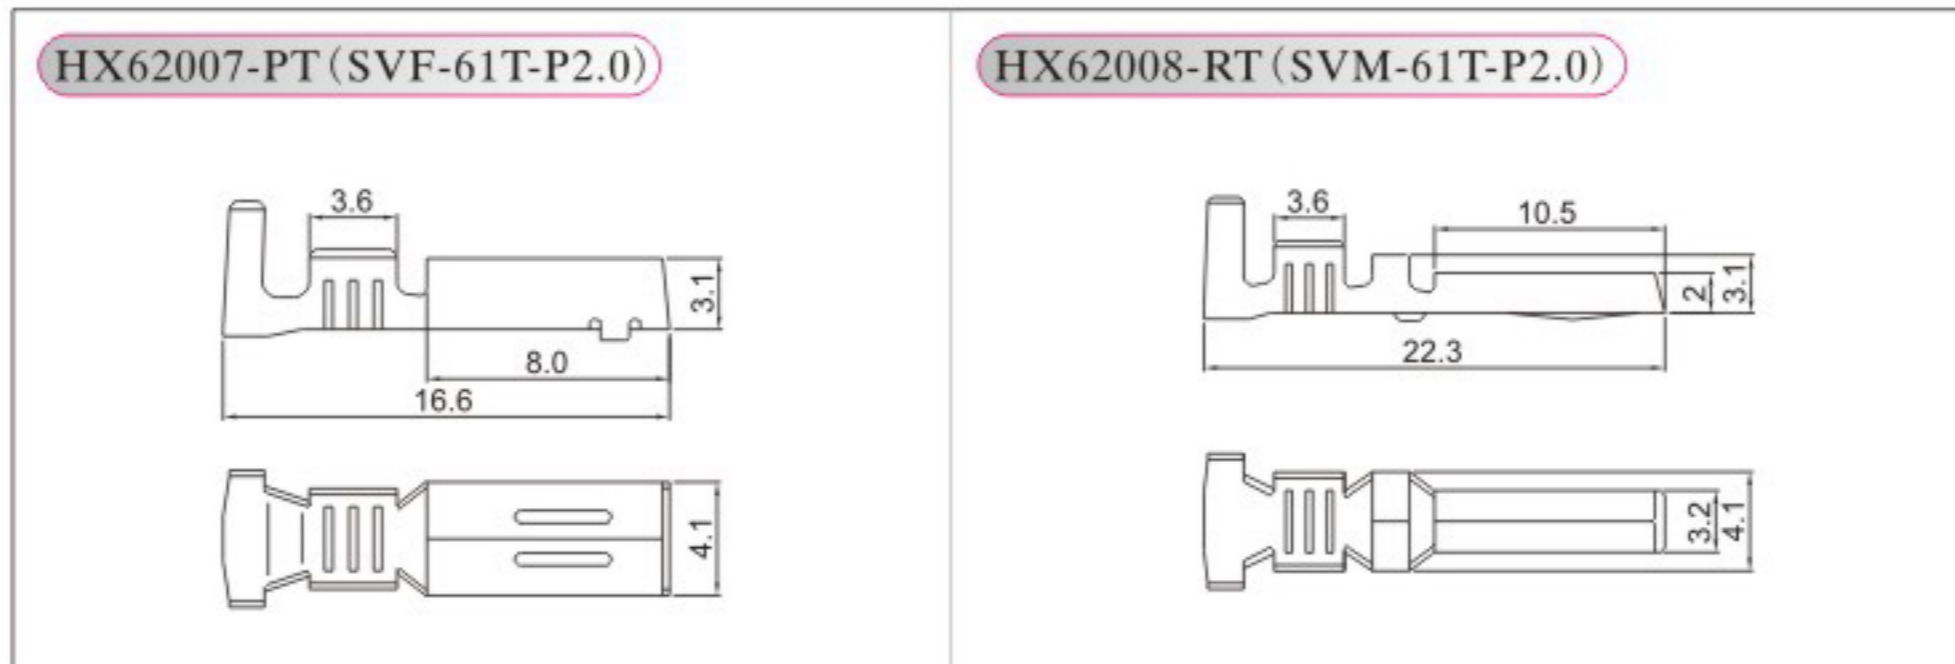



线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 / 针座 (Housing/Wafer)	插片 (Retainer)
1	300V	20A	<p>HX62007-1P (VLP-01V)</p>	<p>HX62008-1RF (VLR-01VF)</p>	<p>HX62007-1S (VLS-01V)</p>
			<p>HX62008-1A (VLR-1A)</p>	<p>安装尺寸 MOUNTING MEASUREMENT</p>	

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座/针座(Housing/Wafer)	插片(Retainer)			
2	300V	20A	HX62007-2P (VLP-02V) 	HX62008-2R (VLR-02V) 	HX62003-2S (VLS-02V) <p>蓝色</p>			
				HX62008-2RF (VLR-02V) 	HX62003-2HS <p>灰色</p>			
				HX62008-2A (VLR-2A) 	安装尺寸 MOUNTING MEASUREMENT 			
			3	300V	19A	HX62007-3P (VLP-03V) 	HX62008-3R (VLR-03V) 	HX62003-3S (VLS-03V)
							HX62008-3A (VLR-3A) 	安装尺寸 MOUNTING MEASUREMENT
						4 (1X4)	300V	18A
	HX62008-4AN (VLR-4AN) 	安装尺寸 MOUNTING MEASUREMENT 						

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座/针座 (Housing/Wafer)	插片 (Retainer)
4 (2X2)	300V	16A	HX62007-4P (VLP-04V) 	HX62008-4R (VLR-04V) 	HX62003-2S (VLS-02V)
				HX62008-4A (VLR-4A) 	安装尺寸 MOUNTING MEASUREMENT
6	300V	16A	HX62007-6P (VLP-06V) 	HX62008-6R (VLR-06V) 	HX62003-3S (VLS-03V)
				HX62008-6A (VLR-6A) 	安装尺寸 MOUNTING MEASUREMENT
8	300V	15A	HX62007-8P (VLP-08V) 	HX62008-8R (VLR-08V) 	HX62003-4S (VLS-04V)
				HX62008-8A (VLR-8A) 	安装尺寸 MOUNTING MEASUREMENT

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座/针座(Housing/Wafer)	插片(Retainer)
12	300V	15A	HX62007-12P (VLP-12V) 	HX62008-12R (VLR-12V) 	HX62007-6S (VLS-6V)
			HX62008-12A (VLR-12A) 	安装尺寸 MOUNTING MEASUREMENT 	

■ 安装尺寸 MOUNTING MEASUREMENT

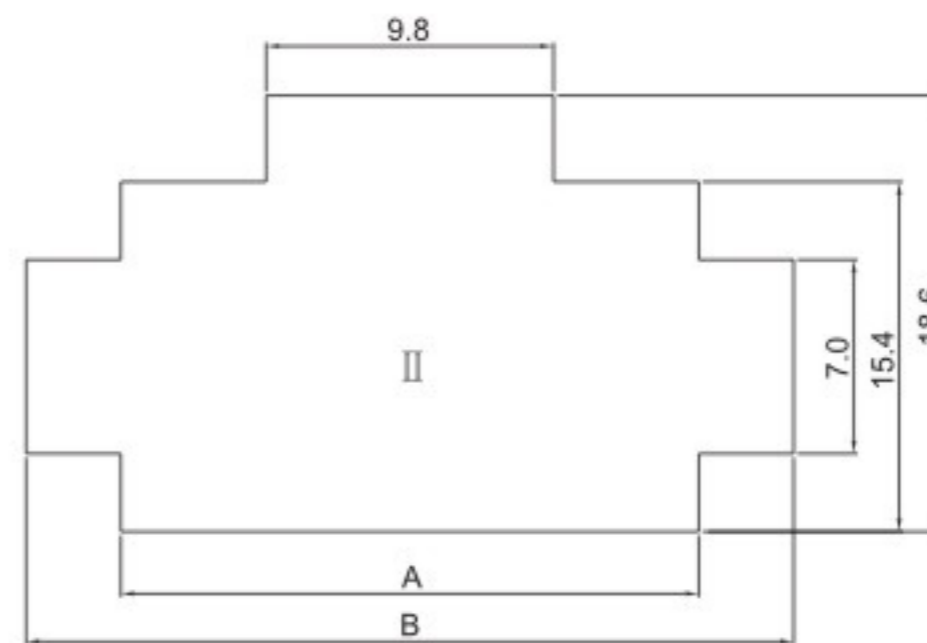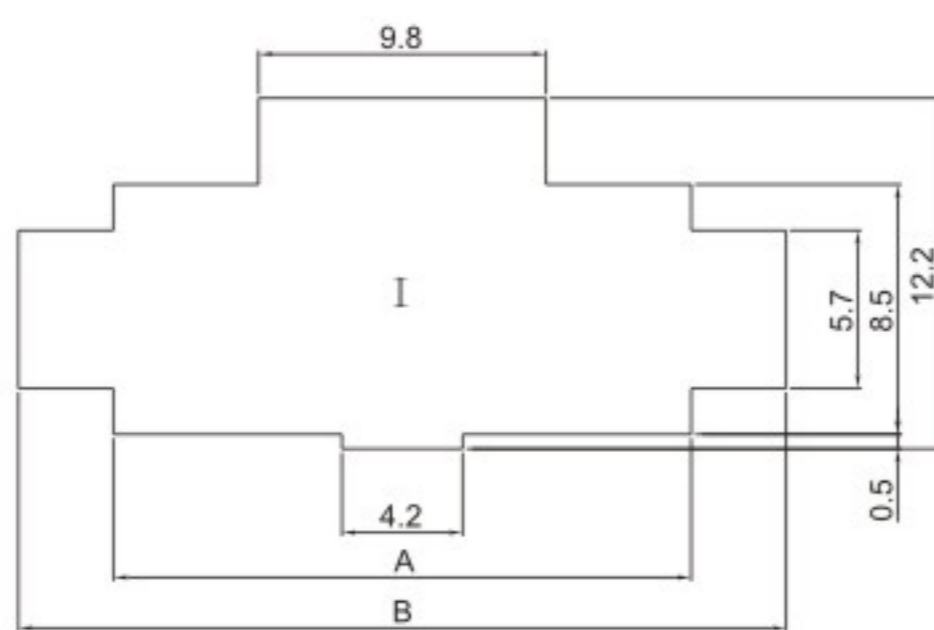

插座 RECEPTACLE HOUSING (HX62008-2~12R)

线数 Poles	型号 Type	尺寸 Dimensions (mm)		示图 Sample
		A	B	
2	HX62008-2R	13.8	20.6	I
3	HX62008-3R	20.0	26.8	I
1×4	HX62008-4RN	26.2	33.0	I
2×2	HX62008-4R	13.8	20.6	II
6	HX62008-6R	20.0	26.8	II
8	HX62008-8R	26.2	33.0	II
12	HX62008-12R	38.9	45.4	II