




SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

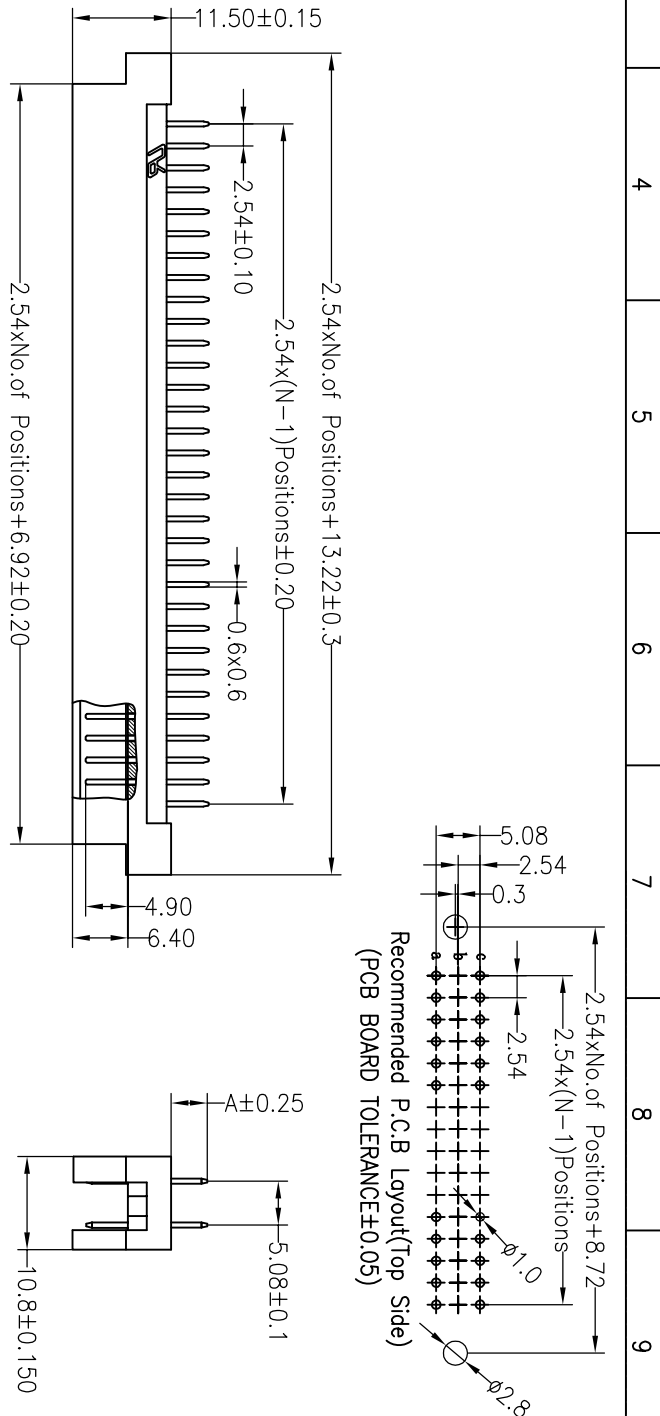


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

Ordering Information

35113 XX C M S XX BN A 1

No. of Pins 30-96P
 Contact Type F=Female M=Male
 Contact Plating G0:Gold Flash S2:2U" Gold S3:30U" Gold S4:15U" Gold S5:30U" Gold S0:Gold Flash/Tin SN:Tin
 Packing A=Troy T=Tube

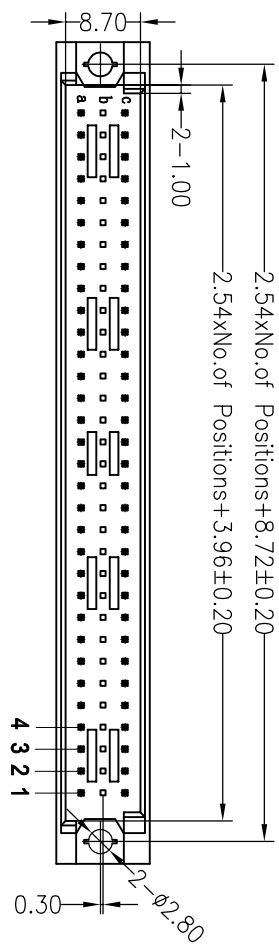

Dimension antitheses list	
ITEM	A
Standard	4.00
Alternate	

OPERATION		DRAW		SCALE		FIT		TITLE:	
OPERATION	DRAW	UNIT	FIT	PROJ.	PROJ.	PROJ.	PROJ.	PROJ.	PROJ.
X.X	Y.YuSheng	mm	A4	1/1	1/1	1/1	1/1	1/1	1/1
X.XX	14.09.16	mm	A4	1/1	1/1	1/1	1/1	1/1	1/1
X.XX	CHECK	mm	A4	1/1	1/1	1/1	1/1	1/1	1/1
X:XXX		mm	A4	1/1	1/1	1/1	1/1	1/1	1/1
±3°		mm	A4	1/1	1/1	1/1	1/1	1/1	1/1
±0.10		mm	A4	1/1	1/1	1/1	1/1	1/1	1/1
±0.20		mm	A4	1/1	1/1	1/1	1/1	1/1	1/1
±0.30		mm	A4	1/1	1/1	1/1	1/1	1/1	1/1

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 35113XXCWSXXBNA1

款式插座 公座 180度 NP 成品镀PTN系列图

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE
A0	2012.04.10	NEW DRAWING				
B	2014.09.16	增加上标				
1						