

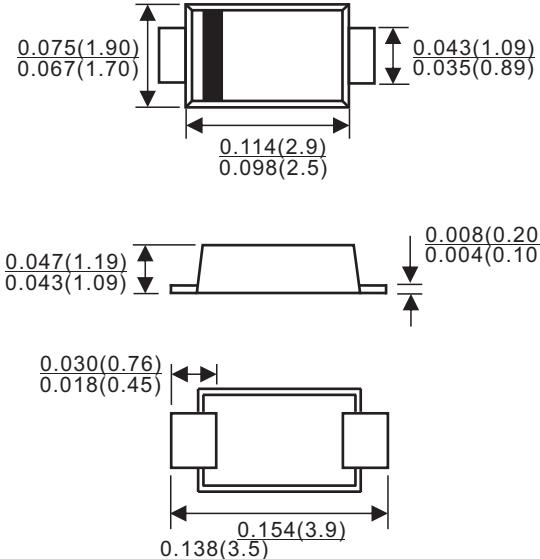

SOD-123FL

Features

- ✧ Low profile package
- ✧ Ideal for automated placement
- ✧ Ultrafast reverse recovery time
- ✧ Low power losses, high efficiency
- ✧ Low forward voltage drop
- ✧ High surge capability
- ✧ High temperature soldering:
260°C/10 seconds at terminals
- ✧ Component in accordance to
RoHS 2002/95/1 and WEEE 2002/96/EC

Mechanical Data

- ✧ **Case:** JEDEC SOD-123FL molded plastic body over passivated chip
- ✧ **Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D
- ✧ **Polarity:** Laser band denotes cathode end
- ✧ **Weight:** 0.017gram



Dimensions in inches and (millimeters)

Maximum Ratings & Thermal Characteristics & Electrical Characteristics

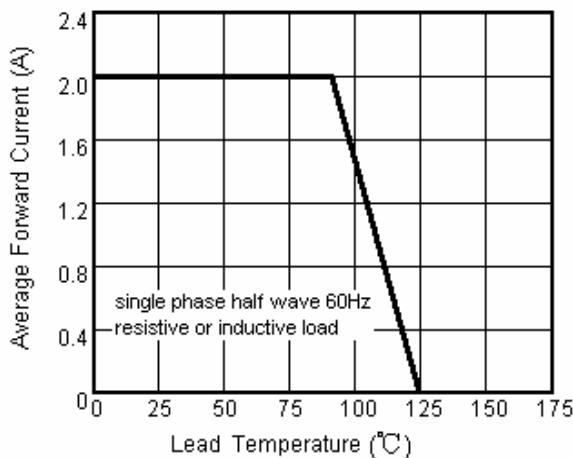
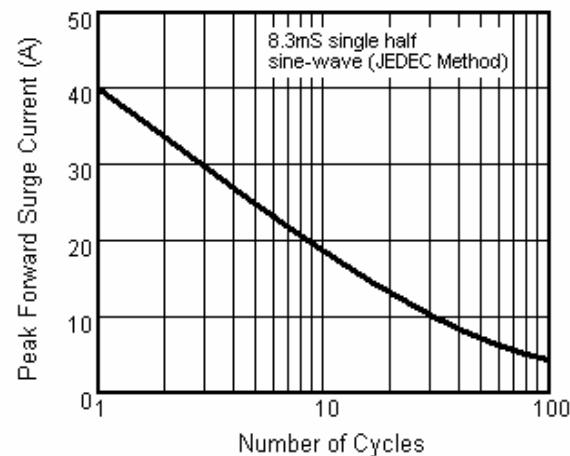
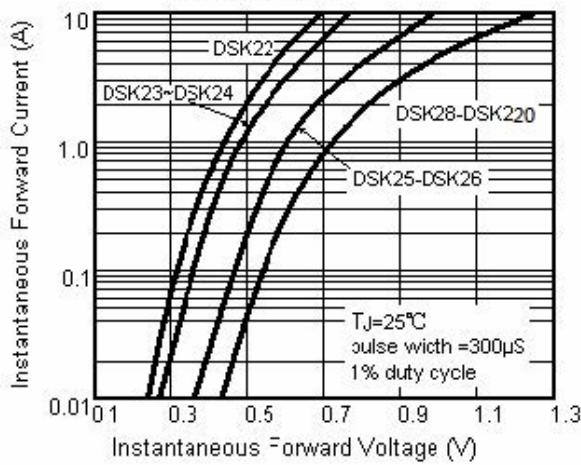
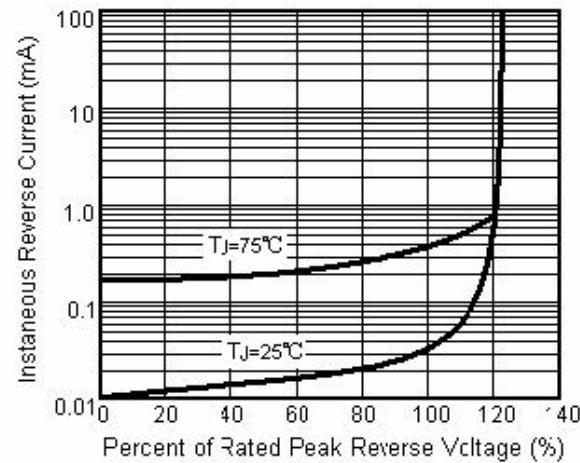
 (T_A = 25 °C unless otherwise noted)

	SYMBOLS	DSK22	DSK23	DSK24	DSK25	DSK26	DS K27	DSK28	DSK29	DSK210	DSK215	DSK220	UNITS				
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	70	80	90	100	150	200	VOLTS				
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	49	56	63	70	83	90	VOLTS				
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	70	80	90	100	150	200	VOLTS				
Maximum average forward rectified current	I _(AV)	2.0											Amp				
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	40.0											Amps				
Maximum instantaneous forward voltage at 2.0A	V _F	0.55		0.70		0.85		0.95		0.95			Volts				
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5				10.0				5.0							
Typical junction capacitance (NOTE 1)	C _J	220		80						pF			pF				
Operating junction temperature range	T _J	-65 to +125				-65 to +150				°C			°C				
Storage temperature range	T _{STG}	-65 to +150															

Note:1. Measured at 1MHz and applied reverse voltage of 4.0V

D.C.

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

Fig.3 Typical Instantaneous Forward Characteristics

Fig.4 Typical Reverse Characteristics


PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SOD-123FL	3000/REEL	90000	40X20X22	5.00	4.00