


REVERSE VOLTAGE: 20 --- 100 V
CURRENT: 5.0 A



Features

- ✧ Plastic package has Underwriters Laborator Flammability Classification 94V-0
- ✧ For surface mounted applications
- ✧ Low profile package
- ✧ Built-in strain relief
- ✧ Metal silicon junction, majority carrier conduction
- ✧ High surge capability
- ✧ High current capability, low forward voltage drop
- ✧ Low power loss, high efficiency
- ✧ For use in low voltage high frequency inverters, free wheeling and polarity protection applications
- ✧ Guardring for overvoltage protection
- ✧ High temperature soldering guaranteed: 250°C/10 seconds at terminals

SMB/DO-214AA

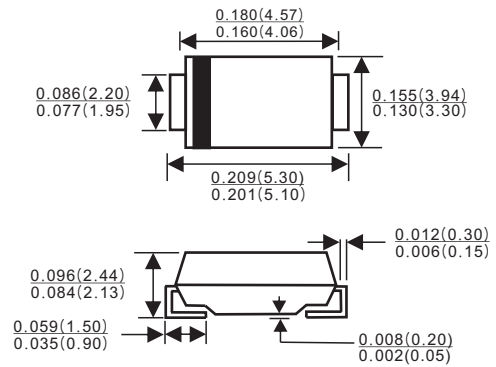

Dimensions in inches and (millimeters)

Mechanical Data

- ✧ Case: JEDEC SMB, molded plastic over passivated chip
- ✧ Polarity: Color band denotes cathode end
- ✧ Weight: 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

		SS52L	SS53L	SS54L	SS55L	SS56L	SS58L	SS59L	SS510L	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	40	50	60	80	90	100	V
Maximum RMS voltage	V_{RWS}	14	21	28	35	42	56	63	70	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	90	100	V
Maximum average forward rectified current at T_L (SEE FIG. 1) (NOTE 2)	$I_{(AV)}$	5.0								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	175								A
Maximum instantaneous forward voltage at 5.0A (NOTE 1)	V_F	0.45		0.52		0.72				V
Maximum DC reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage (NOTE 1) @ $T_A=100^\circ\text{C}$	I_R	0.5								mA
		20				10				
Typical thermal resistance (NOTE 2)	R_{JA}	55								$^\circ\text{C/W}$
	R_{JL}	17								
Operating junction temperature range	T_J	-55 --- +150								$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 --- +150								$^\circ\text{C}$

NOTE: 1. Pulse test: 300 μs pulse width, 1% duty cycle

2. P.C.B. mounted with 0.55"X0.55" (14.0X14.0mm²) copper pad areas

Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

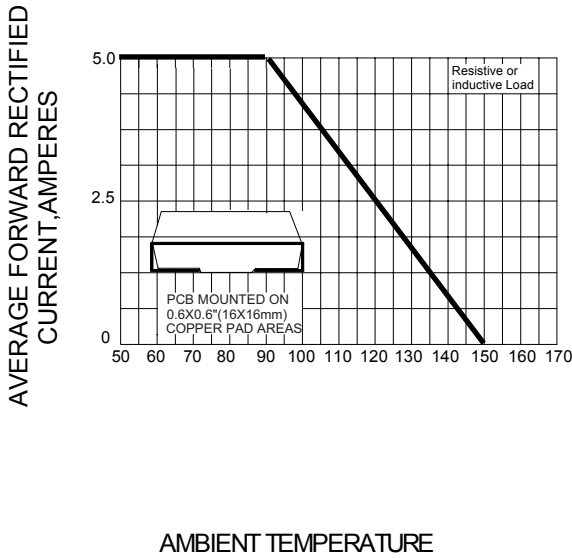


FIG.2– PEAK FORWARD SURGE CURRENT

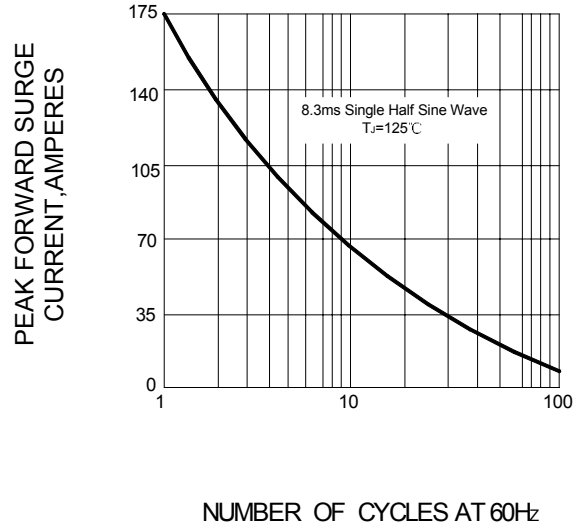


FIG.3 – TYPICAL FORWARD CHARACTERISTICS

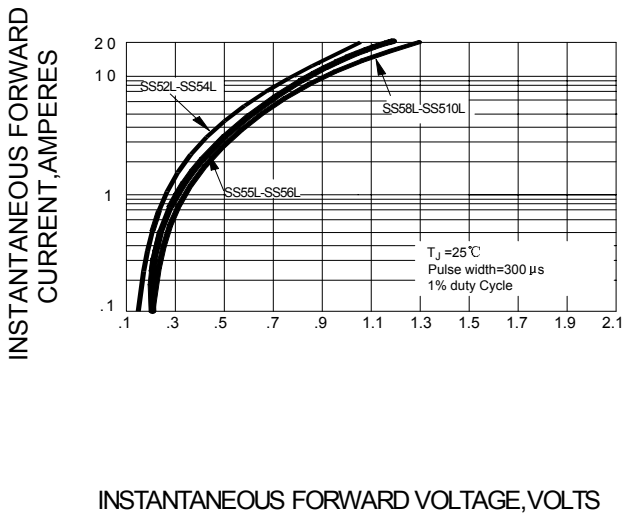


FIG.4 – TYPICAL REVERSE CHARACTERISTICS

