



# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## NXB Series

- 105°C 2,000~5,000Hrs assured.

- Non-solvent proof.
- Very Low Impedance.
- For SMPS, IP-Board, Adaptor, Noise Filter, Charger.
- RoHS compliant.
- Halogen-free capacitors are also available.

NXA

NXB

Low Imp.




## SPECIFICATIONS

Item	Characteristics																		
Rated Voltage Range	6.3 ~ 120 V <sub>DC</sub>																		
Operating Temperature Range	-40 ~ +105°C																		
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)																		
Leakage Current	I = 0.01CV(μA) or 3μA, whichever is greater. Where, I:Max. Leakage current(μA), C:Nominal capacitance(μF), V:Rated voltage(V <sub>DC</sub> ) (at 20°C, 2 minutes)																		
Dissipation Factor(Tan δ)	Rated voltage(V <sub>DC</sub> )	6.3	10	16	25	35	50	63	100	120									
	Tan δ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.08									
	When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase. (at 20°C, 120Hz)																		
Temperature Characteristics (Max. Impedance ratio)	Z(-25°C)/Z(20°C)	2																	
	Z(-40°C)/Z(20°C)	3																	
	(at 120Hz)																		
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) at 105°C for the specified period of time.																		
	Capacitance change $\leq \pm 25\%$ of the initial value																		
	Tan δ $\leq 200\%$ of the initial specified value																		
	Leakage current $\leq$ The initial specified value																		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.																		
	Capacitance change $\leq \pm 25\%$ of the initial value																		
	Tan δ $\leq 200\%$ of the initial specified value																		
	Leakage current $\leq$ The initial specified value																		
Others	Satisfied characteristics KS C IEC 60384-4																		

## DIMENSIONS OF NXB Series

Unit(mm)

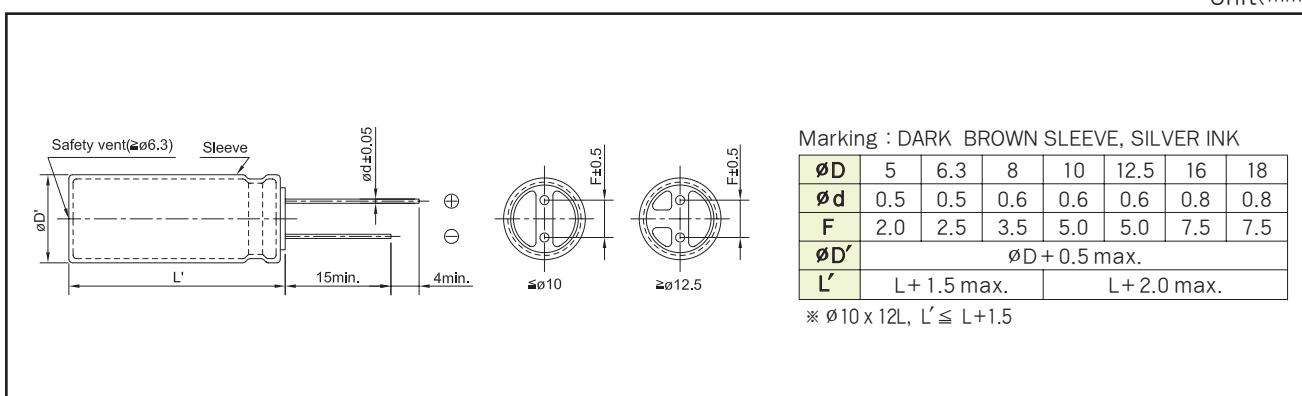

## RATINGS OF NXB Series

Vdc ØD×L(mm)	6.3				10				16			
	μF	IMP.		Ripple	μF	IMP.		Ripple	μF	IMP.		Ripple
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
5×11	220	0.30	1.0	250	150	0.30	1.00	250	100	0.30	1.0	250
6.3×11	470	0.13	0.41	405	330	0.13	0.41	405	100	0.15	0.41	385
	220	0.13	0.41		220	0.13	0.36		220	0.13	0.36	405
6.3×15	560	0.10	0.32	646	470	0.10	0.32	646	330	0.10	0.32	646
8×11.5	820	0.072	0.22	760	330	0.094	0.28	600	470	0.072	0.22	760
					680	0.072	0.22	760				
8×15	1,200	0.060	0.18	818	1,000	0.060	0.18	818	680	0.060	0.18	818
8×20	1,500	0.050	0.16	1,260	1,200	0.050	0.16	1,260	1,000	0.050	0.16	1,260
10×12	1,200	0.053	0.16	1,360	820	0.053	0.16	1,360	680	0.053	0.16	1,360
					1000	0.053	0.16	1,360				
10×12.5	1,200	0.053	0.16	1,360	820	0.053	0.16	1,360	680	0.053	0.16	1,360
					1000	0.053	0.16	1,360				
10×16	1,800	0.038	0.12	1,430	1,000	0.038	0.12	1,430	1,000	0.038	0.12	1,430
					1,500	0.038	0.12	1,430				
10×20	2,200	0.023	0.069	1,820	1,500	0.023	0.069	1,820	1,500	0.023	0.069	1,820
10×25	3,300	0.022	0.066	2,150	2,200	0.022	0.066	2,150	1,800	0.022	0.066	2,150
12.5×16	1,800	0.031	0.078	1,452	1,500	0.031	0.078	1,452	1,000	0.031	0.078	1,452
12.5×20	3,900	0.021	0.053	2,360	3,300	0.021	0.053	2,360	2,200	0.021	0.053	2,360
12.5×25	4,700	0.020	0.050	2,770	3,900	0.020	0.050	2,770	2,700	0.020	0.050	2,770
12.5×30	5,600	0.018	0.046	3,290	4,700	0.018	0.046	3,290	3,300	0.018	0.046	3,290
12.5×35	6,800	0.017	0.044	3,400	5,600	0.017	0.044	3,400	3,900	0.017	0.044	3,400
16×15	2,700	0.040	0.101	1,375	1,800	0.040	0.101	1,375	1,200	0.040	0.101	1,375
16×20	5,600	0.021	0.053	3,140	4,700	0.021	0.053	3,140	3,300	0.021	0.053	3,140
16×25	6,800	0.019	0.051	3,460	5,600	0.019	0.051	3,460	4,700	0.019	0.051	3,460
16×31.5	8,200	0.013	0.035	3,680	6,800	0.013	0.035	3,680	5,600	0.013	0.035	3,680
18×20	5,600	0.020	0.052	3,265	4,700	0.020	0.052	3,265	3,300	0.020	0.052	3,265
18×25	8,200	0.018	0.049	3,611	5,600	0.018	0.049	3,611	3,900	0.018	0.049	3,611

Vdc ØD×L(mm)	25				35				50			
	μF	IMP.		Ripple	μF	IMP.		Ripple	μF	IMP.		Ripple
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
5×11	68	0.30	1.0	250	47	0.30	1.0	250	1	2.50	8.68	53
6.3×11	150	0.13	0.41	405	100	0.13	0.41	405	2.2	2.50	8.68	56
					150	0.10	0.32		4.7	1.50	5.21	82
					150	0.072	0.22		10	1.0	3.47	250
					150	0.072	0.22		22	0.30	1.04	250
					150	0.053	0.16		27	0.30	1.04	250
					150	0.053	0.16		47	0.14	0.50	350
6.3×15	220	0.10	0.32	646	150	0.10	0.32	646	56	0.14	0.50	385
8×11.5	220	0.072	0.22	760	150	0.072	0.22	760	100	0.10	0.32	646
8×15	390	0.060	0.18	818	270	0.060	0.18	818	100	0.072	0.21	724
8×20	560	0.050	0.16	1,260	390	0.050	0.16	1,260	120	0.060	0.24	818
10×12	330	0.053	0.16	1,360	220	0.053	0.16	1,360	150	0.061	0.18	979
					330	0.053	0.16					
10×12.5	470	0.053	0.16	1,360	330	0.053	0.16	1,360	150	0.061	0.18	979
					330	0.053	0.16					
10×16	470	0.038	0.12	1,430	470	0.038	0.12	1,430	220	0.042	0.12	1,370
10×20	680	0.023	0.069	1,820	560	0.023	0.069	1,820	330	0.030	0.090	1,580
10×25	1,000	0.022	0.066	2,150	680	0.022	0.066	2,150	470	0.028	0.085	1,870
12.5×16	680	0.031	0.078	1,452	470	0.031	0.078	1,452	270	0.042	0.078	1,071
12.5×20	1,500	0.021	0.053	2,360	1,000	0.021	0.053	2,360	470	0.027	0.068	2,050
12.5×25	1,800	0.020	0.050	2,770	1,000	0.020	0.050	2,770	560	0.023	0.059	2,410
12.5×30	2,200	0.018	0.046	3,290	1,500	0.018	0.046	3,290	680	0.021	0.052	2,860
12.5×35	2,700	0.017	0.044	3,400	1,800	0.017	0.044	3,400	820	0.019	0.051	2,960
16×15	820	0.040	0.101	1,375	560	0.040	0.101	1,375	390	0.046	0.114	1,196
16×20	2,200	0.021	0.053	3,140	1,500	0.021	0.053	3,140	820	0.023	0.059	2,730
16×25	3,300	0.019	0.051	3,460	1,800	0.019	0.051	3,460	1,000	0.021	0.056	3,010
16×31.5	3,300	0.013	0.035	3,680	2,200	0.013	0.035	3,680	1,500	0.014	0.037	3,201
18×20	2,200	0.020	0.052	3,265	1,500	0.020	0.052	3,265	1,000	0.022	0.059	2,850
18×25	2,700	0.018	0.049	3,611	1,800	0.018	0.049	3,611	1,200	0.020	0.053	3,140



# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## RATINGS OF NXB Series

V <sub>DC</sub> ØD×L(mm)	63			
	μF	IMP.		Ripple
		20°C	-10°C	
5×11	10	0.45	1.8	165
6.3×11	33	0.30	1.2	265
6.3×15	47	0.25	1.0	420
8×11.5	47	0.20	0.80	500
	68	0.20	0.80	500
10×12	68	0.16	0.64	600
10×12.5	68	0.16	0.64	600
10×16	100	0.10	0.40	945
10×20	150	0.080	0.32	1,100
10×25	220	0.070	0.28	1,300
12.5×20	330	0.040	0.16	1,495
16×20	470	0.035	0.14	1,990
16×25	680	0.030	0.12	2,780
16×31.5	1,000	0.020	0.080	2,835

V <sub>DC</sub> ØD×L(mm)	100			120			
	μF	IMP.		Ripple	μF	IMP.	
		20°C	-10°C			20°C	-10°C
5×11	3.3	2.0	8.0	125			
5×11	4.7	2.0	8.0	125			
6.3×11	10	0.50	2.0	205			
6.3×15	22	0.40	1.6	300			
8×11.5	22	0.30	1.2	355	22	0.30	1.2
10×12	33	0.25	1.0	450	33	0.25	1.0
10×12.5	33	0.25	1.0	450	33	0.25	1.0
10×16	47	0.20	0.80	580	47	0.20	0.80
12.5×20	100	0.10	0.40	1,045	100	0.10	0.40
12.5×25	150	0.070	0.28	1,195	120	0.070	0.28
16×25	220	0.060	0.24	1,600	220	0.060	0.24
16×31.5	330	0.040	0.16	1,750	270	0.040	0.16
	470	0.040	0.16	1,750			
18×40	820	0.030	0.12	2,060	560	0.036	0.144

↑      ↑      ↑      ↑  
 Nominal Capacitance(μF)      Impedance (Ω max./100kHz)  
 Rated Ripple Current (mA rms/105°C, 100kHz)

## RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap.(μF)	Freq.(Hz)	120	1k	10k	50k	100k
		1 ~ 180	220 ~ 560	680 ~ 1,800	2,200 ~ 3,900	4,700 ~ 8,200
	0.40	0.75	0.90	0.95	1.00	
	0.50	0.85	0.94	0.96	1.00	
	0.60	0.87	0.95	0.97	1.00	
	0.75	0.90	0.95	0.97	1.00	
	0.85	0.95	0.98	0.99	1.00	