



# MLC Capacitors



# Introduction to Knowles Capacitors

**At Knowles Capacitors, we make Single Layer, Multilayer, High Reliability and Precision Variable Capacitors; EMI Filters; and Thin Film Devices.**

Our business was formed by combining Dielectric Laboratories, Johanson Manufacturing, Novacap, Syfer Technology and Voltronics into a single organization — each well-established specialty capacitor makers with a combined history of more than 175 years.

Our expertise is the design and manufacture of components important to engineers in applications where function and reliability are key. The markets we serve include medical implantable and medical equipment, military, aerospace/avionics, EMI and connector filtering, oil exploration, instrumentation, industrial electronics, optical networks, telecom and automotive.

We aim to be a leader in every market we serve, to the benefit of our customers and our mutual long-term success.

## **We achieve this by:**

- Understanding our customers' real needs and providing products and services to meet and exceed them.
- Providing better products and services than competitors.
- Investing in product development, manufacturing processes and people.
- Insisting on the highest ethical standards and a business culture of trust, respect and open communication.

Products in this catalog form the basis of our ranges for "new designs." However, there are legacy products from our five brands that will still be available — we ask that you contact your local Knowles Precision Devices Sales Office for details and ordering.



# Table of Contents

## INTRODUCTION TO KNOWLES CAPACITORS

|   |       |
|---|-------|
| Product Selector .....  | 4-5   |
| Dielectric Characteristics .....                              | 6-8   |
| Dielectric Termination Combinations .....                     | 9     |
| FlexiCap™ Overview .....                                      | 10    |
| Manufacturing Processes .....                                 | 11    |
| Testing .....   | 12    |
| IECQ-CECC and AEC-Q200 — Periodic Tests .....                 | 13    |
| High Reliability Testing .....                                | 14    |
| Regulations and Compliance .....                              | 15    |
| Explanation of Aging of MLC .....                             | 16    |
| Mounting, Soldering, Storage and Mechanical Precautions ..... | 17-19 |
| Chip Marking System .....                                     | 20    |
| Ceramic Chip Capacitors — Packaging Information .....         | 21-22 |
| Chip Dimensions .....   | 23    |

## MLCC ORDERING INFORMATION

|                                 |       |
|---------------------------------|-------|
| Chip Ordering Information ..... | 24-26 |
|---------------------------------|-------|

## MLC CAPACITORS

|  |       |
|--|-------|
| C0G/NP0 (1B) — AEC-Q200 and Standard Ranges .....                          | 27-29 |
| X7R (2R1) — AEC-Q200 and Standard Ranges.....                              | 30-32 |
| Ordering Information — AEC-Q200 and Standard Ranges.....                   | 33    |
| Novacap Range (Lead-Containing).....                                       | 34-35 |
| Standard Chip — BX .....   | 36    |
| Improved ESR Capacitors — BX and X7R.....                                  | 37    |
| High Q Capacitors — Q and U Ranges .....                                   | 38-40 |
| Ultra-Low ESR High Q MLCCs — X8G Range .....                               | 41-42 |
| High Q Capacitors, High Power RF — Surface Mount and Ribbon Leaded.....    | 43-44 |
| High Q Porcelain Capacitors — CF Series.....                               | 45-47 |
| High Q Porcelain Capacitors — AH Series .....                              | 48-50 |
| UL Series — Ultra Low ESR Ceramic Capacitors .....                         | 51-54 |
| VC1 Residual Capacitors — X7R .....  | 55    |
| TCC/VCC Capacitors — (BX and BZ) X7R .....                                 | 56-57 |
| Open Mode Capacitors — C0G/NP0 (1B) and X7R (2R1) .....                    | 58    |
| Tandem Capacitors — X7R (2R1).....   | 59    |
| IECQ-CECC Range — Specialty High Reliability and Approved Parts .....      | 60    |
| High Capacitance Chip — X7R and X5R.....                                   | 61-62 |
| StackiCap™ Capacitors — AEC-Q200 and Standard Ranges .....                 | 63    |
| 250Vac Rated 50/60Hz AC Capacitors — C0G/NP0 and X7R.....                  | 64    |
| Safety Certified AC Capacitors.....  | 65    |
| Enhanced 250Vac and 305Vac Safety Certified AC Capacitors.....             | 66-69 |
| Legacy 250Vac Safety Certified AC Capacitors .....                         | 70-72 |
| Non-Magnetic Capacitors — High Q, C0G/NP0, X5R and X7R — 16V to 7.2kV..... | 73-74 |
| Non-Magnetic Capacitors, High Power RF — Porcelain High Q .....            | 75-76 |
| 115Vac 400Hz Capacitors .....  | 77    |
| DWV Chip Range — C0G/NP0 and X7R.....                                      | 78    |
| X8R High Temperature Capacitors — up to 150°C.....                         | 79    |
| High Temperature Capacitors — 160°C and 200°C .....                        | 80    |
| High Temperature HiT Range — 200°C — C0G/NP0 and X7R.....                  | 81    |
| High Temperature HiT250 Range — 250°C — C0G/NP0 and X7R .....              | 82    |
| Capacitor Assemblies — ST and SM — C0G/NP0 and X7R.....                    | 83-88 |
| Capacitor Assemblies — "Cap-Rack" Arrays .....                             | 89    |
| Capacitor Assemblies SV2220 .....  | 90-92 |

## MLC RADIAL LEADED CAPACITORS


|  |       |
|--|-------|
| Radial Leaded Capacitors — Ordering Information .....          | 93    |
| Standard Radial Leaded Capacitors — 50V to 5kV.....            | 94    |
| Standard Radial Leaded Capacitors — 500V to 10kV.....          | 95    |
| Standard Radial Leaded Capacitors — C0G/NP0 and X7R.....       | 96    |
| Standard Radial Leaded Capacitors — Packaging Information..... | 97    |
| Radial Leaded Capacitors — Packaging Information .....         | 98-99 |
| High Temperature Radial Leaded Capacitors — Epoxy Coated.....  | 100   |
| High Temperature Radial Leaded Capacitors — Encapsulated.....  | 101   |

## SM EMI FILTERS

|  |         |
|--|---------|
| Surface Mount EMI Filters — E01 and E07 Ranges.....                    | 102-103 |
| Surface Mount EMI Filters — E03 X2Y Integrated Passive Components..... | 104-105 |

# Product Selector

Capacitors  
and Filters  
  
SM and Leaded

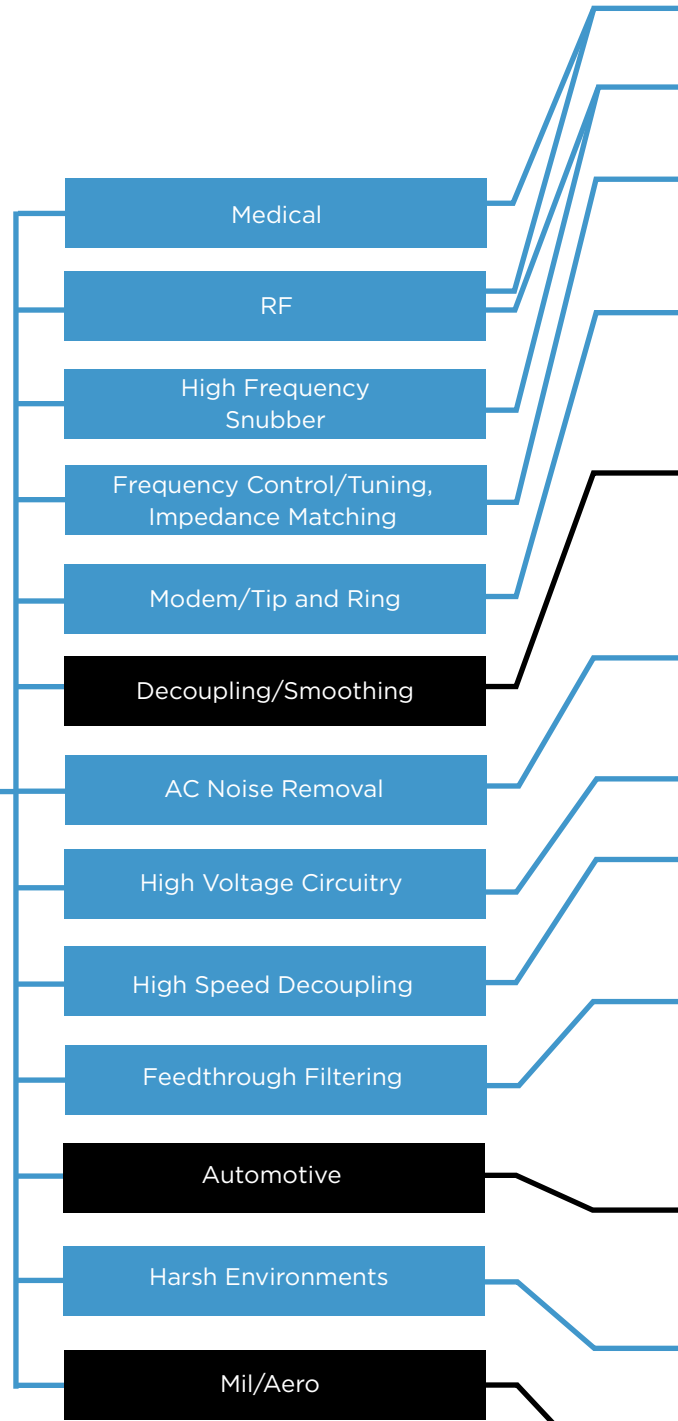

 FlexiCap™ is particularly recommended for these applications where possible.



|  |  |  |
|--|--|--|
| MRI/Non-Magnetic                           | X7R, COG/NPO, High Q and Ultra-Low ESR<br>0402 to 4040 Non-Magnetic Termination<br>0.1pF to 6.8µF - 16V to 3kV | Pages 73-76                                  |
| Class 1 Dielectrics<br>Low DF/ESR          | High Q, COG/NPO & Porcelain Range<br>Ultra-Low ESR   | Pages 38-54                                  |
| Class 1 Dielectrics                        | COG/NPO Range<br>0402 to 8060<br>0.47pF to 1µF - 10V to 12kV   | Pages 27-29 and 34                           |
| High Capacitance                           | X7R<br>1812/2220/2225<br>100nF to 1µF - 250Vdc   | Pages 30-32 and 35                           |
| Safety Certified                           | X7R, COG/NPO Y2/X1, X2<br>Safety Certified Ranges UL/TÜV<br>1808/1812/2211/2215/2220                           | Pages 65-72                                  |
| High Capacitance                           | X7R Range<br>0603 to 8060<br>100pF to 22µF - 16V to 12kV   | Pages 30-32 and 35                           |
| Balanced Line Capacitors                   | X7R, E03 X2Y IPCs<br>0603 to 1812<br>150pF to 1.2µF - 16V to 1kV   | Pages 104-105                                |
| Safety Certified                           | X7R, COG/NPO, Y2/X1, X2<br>Safety Certified Ranges UL/TÜV<br>1808/1812/2211/2215/2220                          | Pages 65-72                                  |
| 250Vac Range                               | X7R, COG/NPO Ranges<br>250Vac Rated 50/60Hz AC   | Page 64                                      |
| PCB Space Saving                           | StackiCap™   | Page 63                                      |
| Low Inductance Capacitors                  | 0505/1111/1825 Ranges<br>X7R, COG/NPO, High Q  | Pages 38-54                                  |
| Capacitive                                 | X7R and COG/NPO, E03 X2Y IPCs<br>0603 to 2220<br>10pF to 1.2µF   | Pages 104-105                                |
| Capacitive/Inductive Pi                    | E01/E07/SBSGC/SBSMC<br>X7R, COG/NPO<br>0805 to 2220 - 1A to 20A  | Pages 102-103 and<br>See EMI Filters Catalog |
| Filtering                                  | SBSP/SBSG/SBSM<br>X7R, COG/NPO 1206 to 2220<br>22pF to 470nF - 1A to 10A                                       | See EMI Filters Catalog                      |
| MLCC                                       | AEC-Q200 E03 X2Y IPCs<br>X7R and COG/NPO AEC-Q200 E01/E07<br>Feedthrough Capacitors                            | Pages 102-105                                |
| High Temperature                           | Open Mode and Tandem<br>FlexiCap™ Capacitors<br>With Extra Safe Electrode Design                               | Pages 58-59                                  |
| Dipped Radial Leaded<br>Capacitors         | AEC-Q200 Ranges<br>X7R, COG/NPO  | Pages 27-32                                  |
| High Reliability<br>Capacitors and Filters | X8R Range<br>Operational Temperature up to 150°C   | Page 79                                      |
|  | Class I and II High Temperature<br>160°C, 200°C and 250°C  | Pages 80-82                                  |
|  | X7R, COG/NPO<br>4.7pF to 22µF - 50V to 12kV  | Pages 93-101                                 |
|  | 115Vac 400Hz Range<br>S02A/IECG-CECC/MIL-PRF/Burn in<br>Hi Rel X2Y IPCs  | Pages 60, 77 and 104-105                     |



# Dielectric Characteristics

## CLASS I DIELECTRICS

Multilayer Ceramic Capacitors are generally divided into classes, which are defined by the capacitance temperature characteristics over specified temperature ranges. These are designated by alphanumeric codes. Code definitions are summarized below and are also available in the relevant national and international specifications.

Capacitors within this class have a dielectric constant range from 10 to 100. They are used in applications that require ultra stable

dielectric characteristics with negligible dependence of capacitance and dissipation factor with time, voltage and frequency. They exhibit the following characteristics:

- a) Time does not significantly affect capacitance and dissipation factor (Tan  $\delta$ ) – no aging.
- b) Capacitance and dissipation factor are not affected by voltage.
- c) Linear temperature coefficient.

## CLASS I DIELECTRICS

|   | COG/NPO (1B) (Porcelain) | P90 (Porcelain)   | COG/NPO (1B)    | X8G  | Class I High Temperature                       |               |  |  |  |
|---|--------------------------|---|-----------------|--|--|---------------|--|--|--|
| Dielectric classifications  | -                        | Ultra Stable  | Ultra Stable    | Ultra Stable                               | Ultra Stable                                   |               |  |  |  |
|   | IECQ-CECC                | -   | -               | 1B/CG                                      | -  |               |  |  |  |
|   | EIA                      | COG/NPO (1B)  | P90             | COG/NPO (1B)                               | X8G  |               |  |  |  |
|   | MIL                      | -   | -               | CG (BP)                                    | -  |               |  |  |  |
| Ordering code   | DLI                      | CF  | AH              | -  | -  |               |  |  |  |
|   | Novacap                  | -   | -               | -  | N, RN  |               |  |  |  |
|   | Syfer                    | -   | -               | Q, U                                       | C  |               |  |  |  |
|   | Voltronics               | F   | H               | Q  | -  |               |  |  |  |
| Rated temperature range   | -                        | -55°C to +125°C   | -55°C to +125°C | -55°C to +125°C                            | -55°C to +150°C                                |               |  |  |  |
| Maximum capacitance change over temperature range   | No DC voltage applied    | 0 ± 15 ppm/°C   | +90 ± 20 ppm/°C | 0 ± 30 ppm/°C                              | 0 ± 30 ppm/°C                                  |               |  |  |  |
|   | Rated DC voltage applied | -   |                 |  |  |               |  |  |  |
| Tangent of loss angle (tan $\delta$ )   | -                        | ≤0.0005 @1MHz   |                 | ≤0.0005 @1MHz                              | >50pF ≤0.0015<br>≤50pF<br>0.0015 (15/Cr + 0.7) | ≤0.0005 @1MHz | ≤0.001   |  |  |
| Insulation resistance (Ri)  | Time constant (Ri x Cr)  | @25°C = 10 <sup>6</sup> MΩ min<br>@125°C = 10 <sup>5</sup> MΩ min |                 | 100GΩ or 1000s<br>(whichever is the least) |  |               | @25°C = 100GΩ or 1000ΩF<br>@160°C & 200°C = 1GΩ or 10ΩF (whichever is the least) |  |  |
| Capacitance tolerance   | Cr < 4.7pF               | ±0.05pF, ±0.10pF, ±0.25pF, ±0.5pF                                 |                 |  |  |               |  |  |  |
|   | Cr ≥ 4.7 to <10pF        | ±0.10pF, ±0.25pF, ±0.5pF  |                 |  |  |               |  |  |  |
|   | Cr ≥ 10pF                | ±1%, ±2%, ±5%, ±10%   |                 |  |  |               |  |  |  |
| Dielectric strength. Voltage applied for 5 seconds. Charging current limited to 50mA maximum. | ≤200V                    | 2.5 times   | 2.5 times       | 2.5 times                                  |  |               |  |  |  |
|   | >200V to <500V           |   |                 | Rated voltage +250V                        |  |               |  |  |  |
|   | 500V to ≤ 1kV            |   |                 | 1.5 times                                  |  |               |  |  |  |
|   | >1kV to ≤ 1.2kV          |   |                 | 1.25 times                                 |  |               |  |  |  |
|   | >1.2kV                   |   |                 | 1.2 times                                  |  |               |  |  |  |
| Climatic category (IEC)   | Chip                     | -   | -               | 55/125/56                                  |  | -             | -  |  |  |
|   | Dipped                   | -   | -               | -  | 55/125/21                                      | -             | -  |  |  |
|   | Discoidal                | -   | -               | -  | 55/125/56                                      | -             | -  |  |  |
| Aging characteristic (Typical)  | -                        | Zero  |                 |  |  |               |  |  |  |
| Approvals   | Syfer Chip               | -   | -               | -  | QC-32100                                       | -             | -  |  |  |



# Dielectric Characteristics

## CLASS II DIELECTRICS

Capacitors of this type have a dielectric constant range of 1000-4000 and also have a nonlinear temperature characteristic that exhibits a dielectric constant variation of less than  $\pm 15\%$  (2R1) from its room temperature value, over the specified temperature range. Generally used for bypassing (decoupling), coupling, filtering, frequency discrimination, DC blocking and voltage transient suppression with greater volumetric efficiency than Class I units, while maintaining stability within defined limits.

Capacitance and dissipation factors are affected by:

- a) Time (Aging)
- b) Voltage (AC or DC)
- c) Frequency

## CLASS II DIELECTRICS

| X5R   | X7R (2R1)                                  |            |            | X8R             | Class II High Temperature |                 |                          |   |
|---|--|------------|------------|-----------------|---------------------------|-----------------|--------------------------|---|
| Stable  | Stable                                     |            |            | Stable          | Stable                    |                 |                          | -   |
| -   | 2C1  | 2R1        | 2X1        | -               | -                         | -               | -                        | IECQ-CECC   |
| X5R   | -  | X7R (2R1)  | -          | X8R             | -                         | -               | -                        | EIA   |
| -   | BZ   | -          | BX         | -               | -                         | -               | -                        | MIL   |
| -   | -  | -          | -          | -               | -                         | -               | -                        | DLI   |
| BW  | -  | B, RB      | X          | S               | G                         | E, RE           | -                        | Novacap   |
| P   | R  | X          | B          | N               | -                         | X               | -                        | Syfer   |
| -   | -  | X          | -          | -               | -                         | -               | -                        | Voltronics  |
| -55°C to +85°C                                  | -55°C to +125°C                            |            |            | -55°C to +150°C | -55°C to +160°C           | -55°C to +200°C | -                        | -   |
| $\pm 15\%$                                      | $\pm 15\%$                                 | $\pm 15\%$ | $\pm 15\%$ | $\pm 15\%$      | +15 -40%                  | +15 -65%        | No DC voltage applied    | Maximum capacitance change over temperature range |
| -   | +15 -45%                                   | -          | +15 -25%   | -               | -                         | -               | Rated DC voltage applied | Rated DC voltage applied                          |
| $\leq 0.025$ Typical*                           | $>25V \leq 0.025$<br>$\leq 25V \leq 0.035$ |            |            | $\leq 0.025$    | $\leq 0.025$              |                 | -                        | Tangent of loss angle ( $\tan \delta$ )           |
| 100G $\Omega$ or 1000s (whichever is the least) |  |            |            |                 |                           |                 |                          | Time constant ( $R_i \times C_r$ )                |
| $\pm 5\%, \pm 10\%, \pm 20\%$                   |  |            |            |                 |                           |                 |                          | -   |
| 2.5 times                                       |  |            |            |                 |                           |                 |                          | $\leq 200V$                                       |
| Rated voltage +250V                             |  |            |            |                 |                           |                 |                          | $>200V$ to $<500V$                                |
| 1.5 times                                       |  |            |            |                 |                           |                 |                          | 500V to $<1kV$                                    |
| 1.2 times                                       |  |            |            |                 |                           |                 |                          | $\geq 1kV$  |
| 55/85/56  | 55/125/56                                  |            |            | 55/150/56       | -                         | -               | -                        | Chip  |
| -   | 55/125/21                                  |            |            | -               | -                         | -               | -                        | Dipped  |
| -   | 55/125/56                                  |            |            | -               | -                         | -               | -                        | Discoidal   |
| 5% Typical                                      | $<2\%$ per time decade                     |            |            |                 |                           |                 |                          |   |
| -   | QC-32100                                   | -          | -          | -               | QC-32100                  | -               | -                        | Syfer chip  |
|   |  |            |            |                 |                           |                 |                          | Approvals   |


\* Refer to the MLC Capacitors catalog for details of Dissipation Factor.



# Dielectric Characteristics


## TYPICAL DIELECTRIC TEMPERATURE CHARACTERISTICS

Porcelain COG/NP0 (1B) and P90

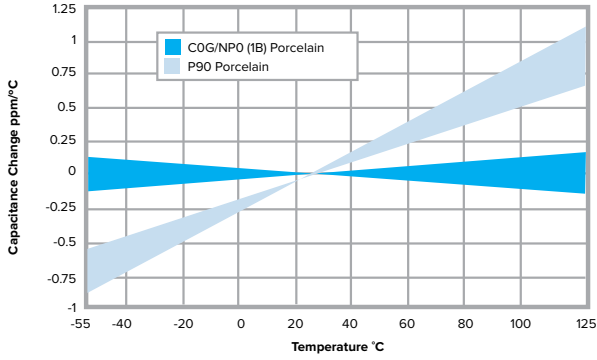


| Family | Dielectric Characteristics | Temperature Range |
|--------|----------------------------|-------------------|
| AH     | P90 +90/ ± 20              | -55°C/+125°C      |
| CF     | COG/NP0 0 ± 15             | -55°C/+125°C      |
| UL     | COG/NP0 0 ± 30             | -55°C/+125°C      |

COG/NP0 (1B)

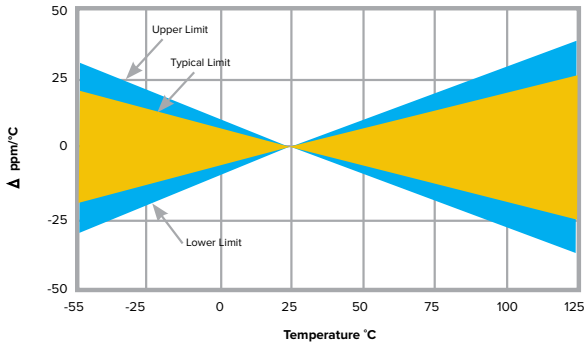


X7R (2R1)

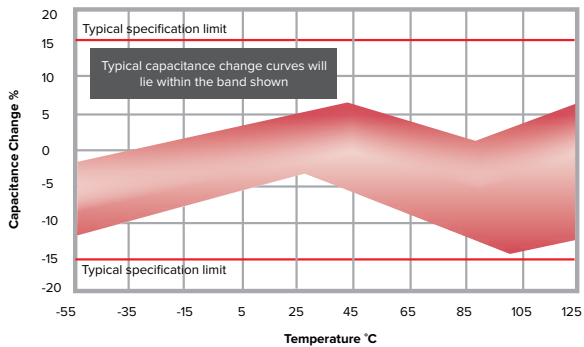


## IMPEDANCE vs. FREQUENCY


Ultra Stable COG/NP0 (1B) Dielectric

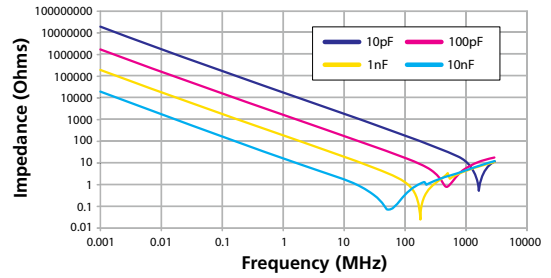

Stable X7R Dielectric

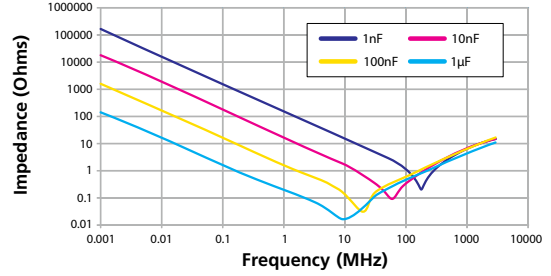


Stable X7R Dielectric – 10nF

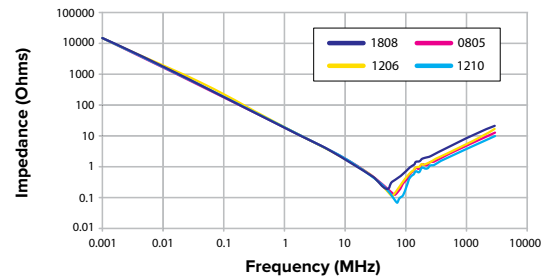


## ESR vs. FREQUENCY – CHIPS

Ultra Stable COG/NP0 Dielectric

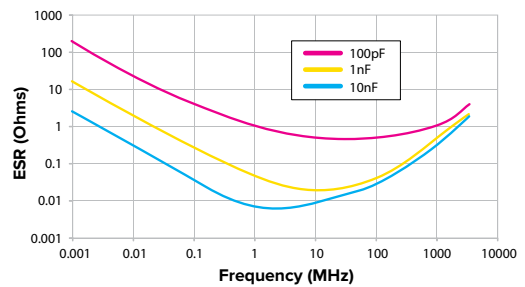

Stable X7R Dielectric

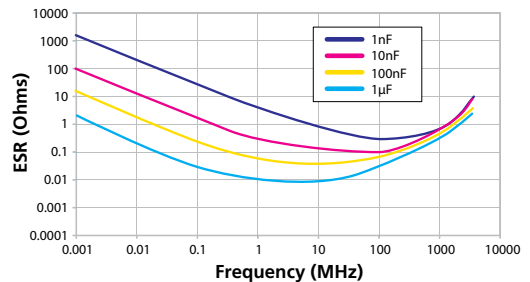



# Dielectric Termination Combinations

|                           |                | Palladium Silver | Palladium Silver | Nickel Barrier (100% matte tin plating) Lead free | Nickel Barrier 90/10% tin/lead | Nickel Barrier Gold flash | FlexiCap™ with Nickel Barrier 100% tin | FlexiCap™ with Nickel Barrier 90/10% tin/lead | FlexiCap™ with Copper Barrier 100% tin | FlexiCap™ Ag Layer, 400-u-in Cu Barrier 200-u-in Sn Plate | FlexiCap™ with Copper Barrier 90/10% tin/lead | Copper Barrier 100% tin | Ag Layer, 400-500u-in Cu Barrier, 200-u-in 90/10 Sn Plate | Copper Barrier 90/10% tin/lead | Solderable Silver | Solderable Palladium Silver | Ag termination, Ni Barrier, Heavy SnPb Plated Solder | Ag termination, Enhanced Ni Barrier, Sn Plated Solder | Ag termination, Enhanced Cu Barrier, Sn Plated Solder | Ag Termination, Cu Barrier Layer, Heavy SnPb Plated Solder |  |
|---------------------------|----------------|------------------|------------------|---|--------------------------------|---------------------------|--|---|--|---|---|-------------------------|---|--------------------------------|-------------------|-----------------------------|--|---|---|--|--|
|                           |                | RoHS             | RoHS             | RoHS  | RoHS                           | RoHS                      | RoHS                                   | RoHS  | RoHS                                   | RoHS  | RoHS  | RoHS                    | RoHS  | RoHS                           | RoHS              | RoHS                        | RoHS   | RoHS  | RoHS  | RoHS   |  |
| NPO Porcelain - Hi Q      |                |                  |                  |   |                                |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| NPO Porcelain - Hi Q      |                | •                | •                |   |                                | •                         |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| Termination ordering code | DLI            | -                | P                | Z   | U                              | S                         | Q                                      | Y   | M                                      | -   | -   | W                       | -   | V                              | -                 | -                           | T  | E   | H   | R  |  |
|                           | Novacap        | P                | PR               | N   | Y                              | NG                        | C                                      | D   | -                                      | -   | -   | B                       | -   | E                              | S                 | K                           | -  | -   | -   | -  |  |
|                           | Syfer          | -                | F                | J   | A                              | -                         | Y                                      | H   | 3                                      | -   | 5   | 2                       | -   | 4                              | -                 | -                           | -  | -   | -   | -  |  |
|                           | Voltronics     | -                | S                | -   | -                              | -                         | -                                      | -   | 3                                      | M   | -   | 2                       | W   | -                              | -                 | -                           | -  | -   | -   | -  |  |
| Dielectric                | Code           |                  |                  |   |                                |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| NPO Porcelain - Hi Q      | DLI - CF       |                  | •                | •   | •                              | •                         | •                                      | •   |  |   |   | •                       |   | •                              |                   |                             | •  | •   | •   | •  |  |
| P90 Porcelain - Hi Q      | DLI - AH       |                  | •                | •   | •                              | •                         | •                                      | •   | •                                      |   |   | •                       |   | •                              |                   |                             | •  | •   | •   | •  |  |
| COG - Hi Q/Low ESR        | Syfer - Q, U   |                  |                  | •   | •                              |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| COG - Hi Q/Low ESR BME    | Syfer - H      |                  |                  | •   |                                |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| COG/NPO                   | Novacap - N/RN | •                | •                | •   | •                              | •                         | •                                      | •   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
|                           | Syfer - A      |                  |                  | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Syfer - C, F   |                  | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| COG/NPO - BME             | Syfer - G, K   |                  |                  | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| COG/NPO - Non-Mag         | Novacap - M    | •                | •                |   |                                |                           |  |   |  |   |   | •                       |   | •                              |                   | •                           |  |   |   |  |  |
|                           | Syfer - C, Q   |                  |                  |   |                                |                           |  |   | •                                      |   | •   |                         |   | •                              |                   |                             |  |   |   |  |  |
|                           | Voltronics - Q |                  | •                |   |                                |                           |  |   |  | •   |   | •                       |   | •                              |                   |                             |  |   |   |  |  |
| X5R                       | Syfer - P      |                  | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Novacap - BW   |                  |                  | •   | •                              | •                         |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| X7R                       | Novacap - B/RB | •                | •                | •   | •                              | •                         | •                                      | •   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
|                           | Syfer - E      |                  |                  |   |                                |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| X7R - BME                 | Syfer - X, D   |                  | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Novacap - BB   |                  |                  | •   | •                              | •                         |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Syfer - J      |                  |                  | •   |                                |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| BX                        | Syfer - S      |                  |                  |   |                                |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Novacap - X    | •                | •                | •   | •                              | •                         | •                                      | •   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
| BZ                        | Syfer - B      |                  | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Syfer - R      |                  | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| X7R - Non-Mag             | Novacap - C    | •                | •                |   |                                |                           |  |   |  |   |   | •                       |   | •                              |                   | •                           |  |   |   |  |  |
|                           | Syfer - X      |                  |                  |   |                                |                           |  |   | •                                      |   | •   |                         |   | •                              |                   |                             |  |   |   |  |  |
|                           | Voltronics - X |                  | •                |   |                                |                           |  |   | •                                      | •   |   |                         | •   |                                |                   |                             |  |   |   |  |  |
| X8R                       | Novacap - S    | •                | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
|                           | Syfer - N      |                  | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Syfer - T      |                  |                  |   |                                |                           | •                                      | •   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| COG/NPO (160°C)           | Novacap - F    | •                | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
| COG/NPO (200°C)           | Novacap - D    |                  |                  |   |                                |                           |  |   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
| COG/NPO (200°C)           | Novacap - RD   |                  |                  | •   |                                |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Syfer - G      |                  |                  | •   |                                |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
| Class II (160°C)          | Novacap - G    | •                | •                | •   | •                              |                           | •                                      | •   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
| Class II (200°C)          | Novacap - E    |                  |                  |   |                                |                           |  |   |  |   |   |                         |   |                                | •                 | •                           |  |   |   |  |  |
|                           | Novacap - RE   |                  |                  | •   |                                |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |
|                           | Syfer - X      |                  |                  | •   |                                |                           |  |   |  |   |   |                         |   |                                |                   |                             |  |   |   |  |  |

Dielectric codes in Red — AEC-Q200 qualified. Dielectric codes in Green — IECQ-CECC.

# FlexiCap™ Overview

## FLEXICAP™ TERMINATION

MLCCs are widely used in electronic circuit design for a multitude of applications. Their small package size, technical performance and suitability for automated assembly make them the component of choice for the specifier.

However, despite the technical benefits, ceramic components are brittle and need careful handling on the production floor. In some circumstances they may be prone to mechanical stress damage if not used in an appropriate manner. Board flexing, depanelization, mounting through hole components, poor storage and automatic testing may all result in cracking.


Careful process control is important at all stages of circuit board assembly and transportation — from component placement to test and packaging. Any significant board flexing may result in stress fractures in ceramic devices that may not always be evident during the board assembly process. Sometimes it may be the end customer who finds out — when equipment fails!

## KNOWLES HAS THE SOLUTION — FLEXICAP™

FlexiCap™ has been developed as a result of listening to customers' experiences of stress damage to MLCCs from many manufacturers, often caused by variations in production processes. Our answer is a proprietary flexible epoxy polymer termination material that is applied to the device under the usual nickel barrier finish. FlexiCap™ will accommodate a greater degree of board bending than conventional capacitors.

## FLEXICAP™ TERMINATION

Ranges are available with FlexiCap™ termination material offering increased reliability and superior mechanical performance (board flex and temperature cycling) when compared with standard termination materials. Refer to Knowles application note reference AN0001. FlexiCap™ capacitors enable the board to be bent almost twice as much before mechanical cracking occurs. Refer to application note AN0002. FlexiCap™ is also suitable for Space applications having passed thermal vacuum outgassing tests. Refer to Syfer application note reference AN0026.

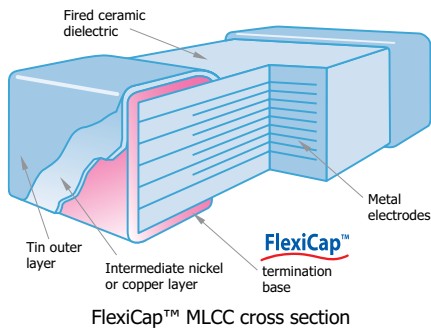

## FLEXICAP™ BENEFITS

With traditional termination materials and assembly, the chain of materials from bare PCB to soldered termination provides no flexibility. In circumstances where excessive stress is applied, the weakest link fails. This means the ceramic itself, which may fail short-circuit.

The benefit to the user is to facilitate a wider process window — giving a greater safety margin and substantially reducing the typical root causes of mechanical stress cracking. FlexiCap™ may be soldered using your traditional wave or reflow solder techniques including, lead free, and needs no adjustment to equipment or current processes.

Knowles has delivered millions of FlexiCap™ components, and during that time has collected substantial test and reliability data, working in partnership with customers worldwide, to eliminate mechanical cracking. An additional benefit of FlexiCap™ is that MLCCs can withstand temperature cycling -55°C to +125°C in excess of 1,000 times without cracking. FlexiCap™ termination has no adverse effect on any electrical parameters, nor affects the operation of the MLCC in any way.



- Picture taken at 1,000x magnification using a SEM to demonstrate the fibrous nature of the FlexiCap™ termination that absorbs increased levels of mechanical stress.

## AVAILABLE ON THE FOLLOWING:

- All High Reliability Ranges
- Standard and High Voltage Capacitors
- Open Mode and Tandem Capacitors
- Safety Certified Capacitors
- Non-Magnetic Capacitors
- 3-terminal EMI Chips
- X2Y Integrated Passive Components
- X8R High Temperature Capacitors

## SUMMARY OF PCB BEND TEST RESULTS

The bend tests conducted on X7R have proven that the FlexiCap™ termination withstands a greater level of mechanical stress before mechanical cracking occurs. The AEC-Q200 test for X7R requires a bend level of 2mm minimum and a cap change of less than 10%. Knowles tests to a minimum bend of 5mm for X7R with FlexiCap™ termination and for COG with either FlexiCap™ or standard termination.

| Product X7R (2R1)    | Typical bend performance under AEC-Q200 test conditions |
|----------------------|---|
| Standard termination | 2mm to 3mm  |
| FlexiCap™            | Typically 8mm to 10mm                                   |


## APPLICATION NOTES

FlexiCap™ may be handled, stored and transported in the same manner as standard terminated capacitors. The requirements for mounting and soldering FlexiCap™ are the same as for standard SMD capacitors. For customers currently using standard terminated capacitors, there should be no requirement to change the assembly process when converting to FlexiCap™. Based upon board bend tests in accordance with IEC 60384-1, the amount of board bending required to mechanically crack a FlexiCap™ terminated capacitor is significantly increased compared with standard terminated capacitors. It must be stressed, however, that capacitor users must not assume that the use of FlexiCap™ terminated capacitors will totally eliminate mechanical cracking. Good process controls are still required for this objective to be achieved.




# Manufacturing Processes

## PRODUCTION PROCESS FLOWCHART

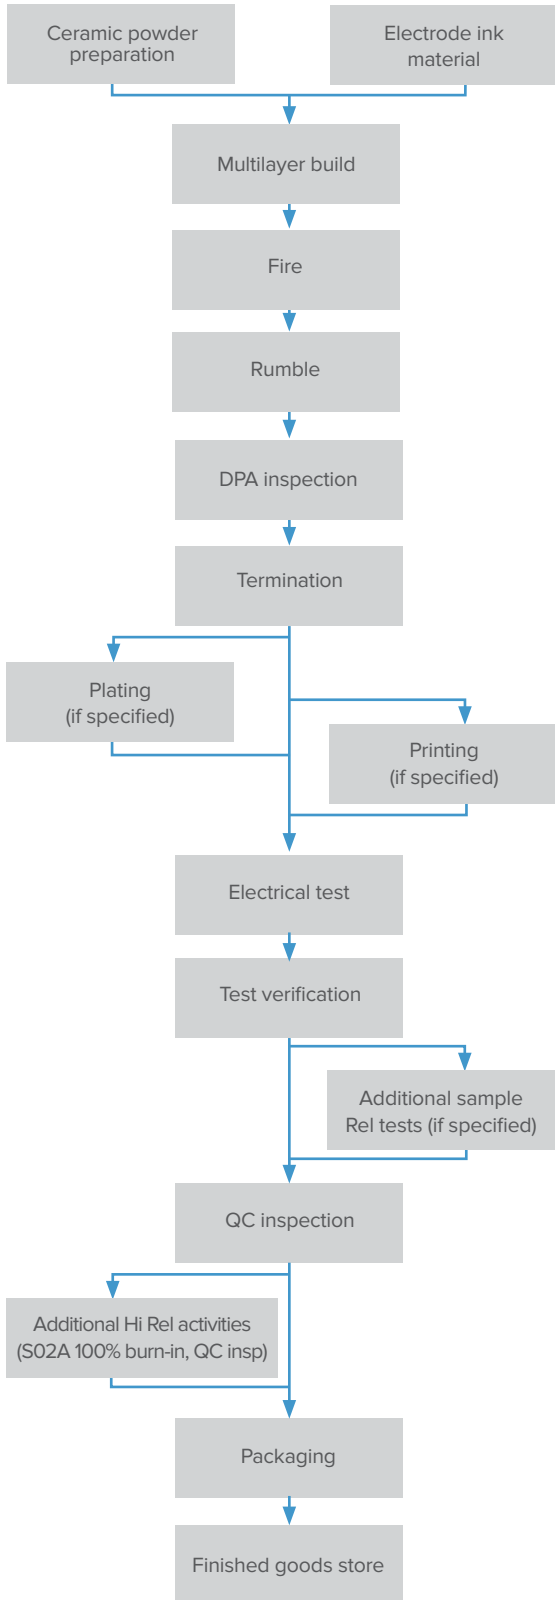

## KNOWLES RELIABILITY GRADES

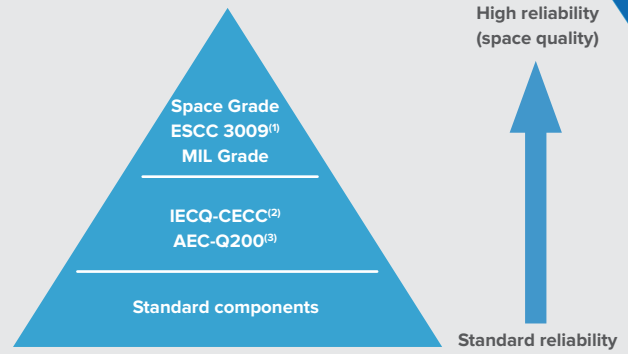


Notes:

1) Space grade tested in accordance with ESCC3009 (refer to Knowles Spec S02A 0100) or MIL Grade (in accordance with MIL-PRF-123, MIL-PRF-55681).

2) IECQ-CECC. The International Electrotechnical Commission (IEC) Quality Assessment System for Electronic Components. This is an internationally recognized product quality certification that provides customers with assurance that the product supplied meets high-quality standards. View Knowles IECQ-CECC approvals at [iecq.org](http://iecq.org) or at [knowlesc capacitors.com](http://knowlesc capacitors.com)

3) AEC-Q200. Automotive Electronics Council Stress Test Qualification For Passive Components. Refer to Knowles application note reference AN0009.

## KNOWLES RELIABILITY SURFACE MOUNT PRODUCT GROUPS

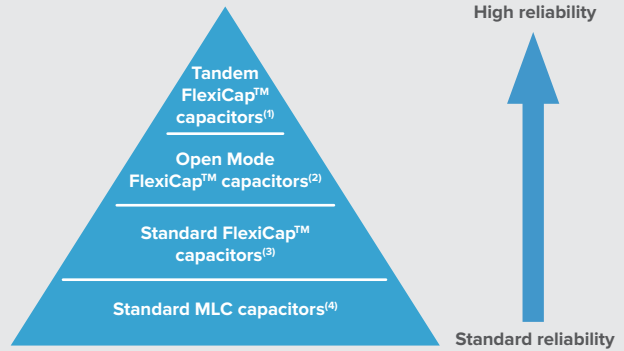

Notes:

1) "Tandem" construction capacitors, i.e., internally having the equivalent of 2 series capacitors. If one of these should fail short-circuit, there is still capacitance end to end and the chip will still function as a capacitor, although capacitance may be affected. Refer to application note AN0021. Also available qualified to AEC-Q200.

2) "Open Mode" capacitors with FlexiCap™ termination also reduce the possibility of a short-circuit by utilizing inset electrode margins. Refer to application note AN0022. Also available qualified to AEC-Q200.

3) Multilayer capacitors with Knowles FlexiCap™ termination. By using FlexiCap™ termination, there is a reduced possibility of the mechanical cracking occurring.

4) "Standard" capacitors include MLCCs with tin finish over nickel but no FlexiCap™.



# Testing

## TESTS CONDUCTED DURING BATCH MANUFACTURE

### KNOWLES RELIABILITY SM PRODUCT GROUP

|  | Standard SM capacitors | IECQ-CECC/MIL grade | AEC-Q200 | S (Space grade)<br>High Rel S02A ESCC 3009<br>MIL-PRF-123 |
|--|------------------------|---------------------|----------|---|
| Solderability  | ●                      | ●                   | ●        | ●   |
| Resistance to soldering heat                               | ●                      | ●                   | ●        | ●   |
| Plating thickness verification (if plated)                 | ●                      | ●                   | ●        | ●   |
| Destructive Physical Analysis (DPA)                        | ●                      | ●                   | ●        | ●   |
| Voltage proof test (DWV/Flash)                             | ●                      | ●                   | ●        | ●   |
| Insulation resistance                                      | ●                      | ●                   | ●        | ●   |
| Capacitance test   | ●                      | ●                   | ●        | ●   |
| Dissipation factor test                                    | ●                      | ●                   | ●        | ●   |
| 100% visual inspection                                     | ○                      | ○                   | ●        | ●   |
| 100% burn-in (2xRV @125°C for 168 hours)                   | ○                      | ○                   | ○        | ●   |
| Load sample test @ 125°C                                   | ○                      | ○                   | ●        | LAT1 & LAT2 (1,000-hours)                                 |
| Humidity sample test @ 85°C/85% RH                         | ○                      | ○                   | ●        | 240 hours   |
| Hot IR sample test   | ○                      | ○                   | ○        | ○   |
| Axial pull sample test (MIL-STD-123)                       | ○                      | ○                   | ○        | ○   |
| Breakdown voltage sample test                              | ○                      | ○                   | ○        | ○   |
| Deflection (bend) sample test                              | ○                      | ○                   | ○        | ○   |
| Scanning Acoustic Microscop (SAM)                          | ○                      | ○                   | ○        | ○   |
| LAT1 (4 x adhesion, 8 x rapid temp change + LAT2 and LAT3) | -                      | -                   | -        | ○   |
| LAT2 (20 x 1,000-hour life test + LAT3)                    | -                      | -                   | -        | ○   |
| LAT3 (6 x TC and 4 x solderability)                        | -                      | -                   | -        | ○   |

- Test conducted as standard.
- Optional test. Please discuss with the Sales Office.



# IECQ-CECC and AEC-Q200 — Periodic Tests

## PERIODIC TESTS CONDUCTED FOR IECQ-CECC AND AEC-Q200

| Test ref | Test  | Termination type                        | Additional requirements  | Sample acceptance |    |   | Reference                        |
|----------|---|---|--|-------------------|----|---|----------------------------------|
|          |   |   |  | P                 | N  | C |                                  |
| P1       | High temperature exposure (storage)               | All types                               | Unpowered. 1,000 hours @ T=150°C<br>Measurement at 24 ± 2 hours after test conclusion  | 12                | 77 | 0 | MIL-STD-202<br>Method 108        |
| P2       | Temperature cycling                               | COG/NP0: All types<br>X7R: Y and H only | 1,000 cycles -55°C to +125°C<br>Measurement at 24 ± 2 hours after test conclusion  | 12                | 77 | 0 | JESD22<br>Method JA-104          |
| P3       | Moisture resistance                               | All types                               | T = 24 hours/cycle. Note: Steps 7a and 7b not required. Unpowered.<br>Measurement at 24 ± 2 hours after test conclusion  | 12                | 77 | 0 | MIL-STD-202<br>Method 106        |
| P4       | Biased humidity                                   | All types                               | 1,000 hours 85°C/85% RH. Rated voltage or 50V, whichever is the least and 1.5V.<br>Measurement at 24 ± 2 hours after test conclusion   | 12                | 77 | 0 | MIL-STD-202<br>Method 103        |
| P5       | Operational life                                  | All types                               | Condition D steady state TA=125°C at a load test voltage of 1.5xRV for RV<500Vdc, RV for RV≥500Vdc.<br>Safety rated capacitors tested IAW IEC/EN60384-14.<br>Measurement at 24 ± 2 hours after test conclusion.                                      | 12                | 77 | 0 | MIL-STD-202<br>Method 108        |
| P6       | Resistance to solvents                            | All types                               | Note: Add aqueous wash chemical<br>Do not use banned solvents  | 12                | 5  | 0 | MIL-STD-202<br>Method 215        |
| P7       | Mechanical shock                                  | COG/NP0: All types<br>X7R: Y and H only | Figure 1 of Method 213. Condition F  | 12                | 30 | 0 | MIL-STD-202<br>Method 213        |
| P8       | Vibration   | COG/NP0: All types<br>X7R: Y and H only | 5g's for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8" x 5" PCB 0.031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point.<br>Test from 10-2,000Hz. | 12                | 30 | 0 | MIL-STD-202<br>Method 204        |
| P9       | Resistance to soldering heat                      | All types                               | Condition B, no pre-heat of samples:<br>Single wave solder — Procedure 2   | 3                 | 12 | 0 | MIL-STD-202<br>Method 210        |
| P10      | Thermal shock                                     | COG/NP0: All types<br>X7R: Y and H only | -55°C/+125°C, 300 cycles<br>Maximum transfer time — 20 seconds,<br>dwell time — 15 minutes. Air-Air  | 12                | 30 | 0 | MIL-STD-202<br>Method 107        |
| P11      | Adhesion, rapid temp change and climatic sequence | X7R: A, F and J only                    | 5N force applied for 10s, -55°C/+125°C for 5 cycles, damp heat cycles  | 12                | 27 | 0 | BS EN 60384-1<br>Clause 8.1, 8.2 |
| P12      | Board flex  | COG/NP0: All types<br>X7R: Y and H only | 3mm deflection Class I<br>2mm deflection Class II  | 12                | 30 | 0 | AEC-Q200-005                     |
| P13      | Board flex  | X7R: A, F and J only                    | 1mm deflection   | 12                | 12 | 0 | BS EN 60384-1<br>Clause 7.8      |
| P14      | Terminal strength                                 | All types                               | Force of 1.8kg for 60 seconds  | 12                | 30 | 0 | AEC-Q200-006                     |
| P15      | Beam load test                                    | All types                               | -  | 12                | 30 | 0 | AEC-Q200-003                     |
| P16      | Damp heat steady state                            | All types                               | 56 days, 40°C/93% RH 15x no volts, 15x 5Vdc, 15x rated voltage or 50V, whichever is the least  | 12                | 45 | 0 | BS EN 60384-1<br>Clause 8.3      |

Test results are available on request.

P = Period in months.

N = Sample size.

C = Acceptance criteria.



# High Reliability Testing

Our High Rel products are designed for optimum reliability and are burned in at elevated voltage and temperature levels. They are 100% electrically inspected to ascertain conformance to a strict performance criteria.

Applications for High Reliability products include medical implanted devices, aerospace, airborne, various military applications and consumer uses requiring safety margins not attainable with conventional product.

We have the ability to test surface mount and leaded capacitors to High Reliability standards as detailed below, or to customer SCD. Military performance specifications are designed and written for the voltage/capacitance ratings of the individual product slash numbers associated with the specification.

Some of the requirements of the military document may not apply to the High Reliability product. The following details the intent of the individual military specifications available for test and the deviations that may apply. Product voltage ratings outside of the intended military specification will follow the voltage test potential outlined. Contact the Sales Office with any requirements or deviations that are not covered here.

## ENVIRONMENTAL TESTING

We also have the capability to perform all the Environmental Group B, Group C and Qualification testing to the referenced military specifications.

Testing abilities include the following:

- Nondestructive internal examination
- Destructive physical analysis
- Radiographic inspection
- Terminal strength
- Resistance to soldering heat
- Voltage-temperature limits
- Temperature coefficient
- Moisture resistance
- Humidity, steady state, low voltage
- Vibration
- Resistance to solvents
- Life
- Thermal shock and immersion
- Low temperature storage
- Barometric pressure
- Shock, specified pulse
- Mechanical shock
- Constant acceleration
- Wire bond evaluation
- Partial discharge (corona)
- 200°C Voltage Conditioning

## MILITARY PERFORMANCE SPECIFICATIONS

### MIL-PRF-55681 (GROUP A)

General purpose military high reliability specification for surface mount sizes 0805 through 2225 in 50V and 100V.

- VOLTAGE CONDITIONING
- 100 HRS, 2X VDCW, 125°C
- DWV, IR, 125°C IR, CAP, DF TEST
- VISUAL & MECH. INSPECTION (AQL SAMPLE PLAN)
- SOLDERABILITY, SAMPLE 13(0)
- 8% PDA MAXIMUM

### MIL-PRF-123 (GROUP A)

The specification affords an increased reliability level over MIL-PRF-55681 for space, missile and other high reliability applications such as medical implantable or life support equipment. The specification covers surface mount sizes 0805 through 2225 in 50V rating and various radial/axial leaded products in 50V, 100V and 200V ratings.

- THERMAL SHOCK, 20 CYCLES
- VOLTAGE CONDITIONING 168/264 HRS, 2X VDCW, 125°C
- DWV, IR, 125°C IR, CAP, DF TEST
- VISUAL & MECH. INSPECTION SAMPLE 20(0)
- DPA<sup>(1)</sup>
- PDA, 3% (0.1%), 5% (0.2%) MAX<sup>(2)</sup>

### MIL-PRF-39014 (GROUP A)

The specification covers general military purpose radial/axial leaded and encapsulated products in 50V, 100V and 200V ratings.

- THERMAL SHOCK, 5 CYCLES
- VOLTAGE CONDITIONING 96 HRS, 2X VDCW, 125°C
- DWV, IR, 125°C IR, CAP, DF TEST
- VISUAL & MECH. INSPECTION (AQL SAMPLE PLAN)
- SOLDERABILITY, SAMPLE 13(0)
- 8% PDA MAXIMUM

### MIL-PRF-49467 (GROUP A)

General purpose military high reliability specification for radial leaded epoxy coated products. The specification covers sizes 1515 through 13060 with 600V, 1kV, 2kV, 3kV, 4kV and 5kV ratings.

- THERMAL SHOCK, 5 CYCLES
- VOLTAGE CONDITIONING 96 HRS, RATED VDCW, 125°C
- PARTIAL DISCHARGE (OPTION)<sup>(3)</sup>
- DWV, IR, 125°C IR, CAP, DF TEST
- VISUAL & MECH. INSPECTION SAMPLE 13(0)
- SOLDERABILITY, SAMPLE 5(0)
- 10% PDA MAXIMUM

### MIL-PRF-49470 (DSCC 87106) (GROUP A)

General purpose military high reliability specification for stacked and leaded capacitors for switch mode power supplies. The specification covers sizes 2225 through 120200 in 50V, 100V, 200V and 500V ratings.

- THERMAL SHOCK, 5 CYCLES
- VOLTAGE CONDITIONING 96 HRS, 2X VDCW<sup>(4)</sup>, 125°C
- DWV, IR, 125°C IR, CAP, DF TEST
- VISUAL & MECH. INSPECTION SAMPLE 13(0)
- SOLDERABILITY, SAMPLE 5(0)
- 10% PDA MAXIMUM

### MIL-PRF-38534 (GROUP A)

Specification for Hybrid Microcircuits with a section for Element Evaluation on passive components. There are two classification levels of reliability. Class H is for a standard military quality level. Class K is for the highest reliability level intended for space application. Knowles will perform a 100-hour burn-in on all Class K products and assumes Class K Subgroup 3 samples will be unmounted and Subgroup 4 (wirebond) shall not apply unless otherwise stated.

### TEST VOLTAGE (VDC)

This test potential shall be used on all High Reliability Testing unless otherwise specified.

\*V/C Is Voltage Conditioning.

| WVDC | DWV        | V/C*       |
|------|------------|------------|
| <200 | 2.5X Rated | 2.0X Rated |
| 250  | 500V       | 400V       |
| 300  | 500V       | 400V       |
| 400  | 600V       | 500V       |
| 500  | 750V       | 600V       |
| 600  | 750V       | 600V       |
| >700 | 1.2X Rated | 1.0X Rated |

#### Notes:

1. MIL-PRF-123 DPA shall be per TABLE XIV AQL requirements unless otherwise specified.
2. MIL-PRF-123 allowable PDA shall be 3% overall and 0.1% in the last 48 hours for capacitance/voltage values listed in MIL-PRF-123, and be 5% overall and 0.2% in the last 48 hours for capacitance/voltage values beyond MIL-PRF-123.
3. MIL-PRF-49467 standard Group A is without Partial Discharge. Partial Discharge test is optional and must be specified.
4. MIL-PRF-49470 (DSCC 87106) 500V rated product has Voltage Conditioning at 1.2X VDCW.



# Regulations and Compliance

## RELEASE DOCUMENTATION

|   | Knowles reliability SM product group |           |                    |                               |
|---|--------------------------------------|-----------|--------------------|-------------------------------|
|   | Standard SM capacitors               | IECQ-CECC | AEC-Q200 MIL grade | S (Space grade) High Rel S02A |
| Certificate of conformance                  | ●                                    | -         | ●                  | ●                             |
| IECQ-CECC Release certificate of conformity | -                                    | ●         | -                  | -                             |
| Batch electrical test report                | ○                                    | ○         | ○                  | Included in data pack         |
| S (space grade) data documentation package  | -                                    | -         | -                  | ●                             |

- Release documentation supplied as standard.
- Original documentation.

## PERIODIC TESTS CONDUCTED AND RELIABILITY DATA AVAILABILITY

### STANDARD SURFACE MOUNT CAPACITORS

Components are randomly selected on a sample basis and the following routine tests are conducted:

- Load Test. 1,000 hours @125°C (150°C for X8R). Applied voltage depends on components tested.
- Humidity Test. 168 hours @ 85°C/85% RH.
- Board Deflection (bend test).


Test results are available on request.

### CONVERSION FACTORS

| From | To           | Operation                             |
|------|--------------|---------------------------------------|
| FITS | MTBF (hours) | $10^9 \div \text{FITS}$               |
| FITS | MTBF (years) | $10^9 \div (\text{FITS} \times 8760)$ |

FITS = Failures in  $10^9$  hours.  
MTBF = Mean time between failures.

## EXAMPLE OF FIT (FAILURE IN TIME) DATA AVAILABLE:

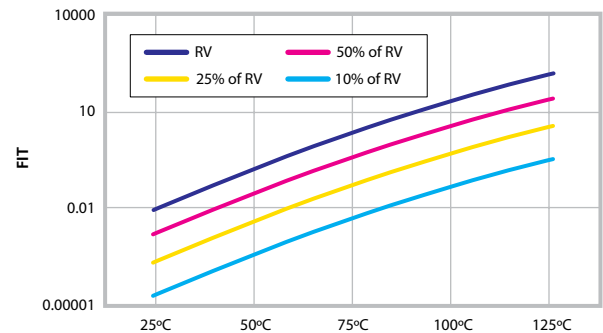

Component type: 0805 (C0G/NP0 and X7R).  
Testing location: Knowles reliability test department.  
Results based on: 16,622,000 component test hours.

## REGISTRATION, EVALUATION, AUTHORIZATION AND RESTRICTION OF CHEMICALS (REACH)

The main purpose of REACH is to improve the protection of human health and the environment from the risks arising from the use of chemicals. Knowles maintains both ISO14001 Environmental Management System and OHSAS 18001 Health and Safety Management System approvals that require and ensure compliance with corresponding legislation such as REACH. For further information, please contact the Knowles Precision Devices Sales Office at knowlescapacitors.com

## ROHS COMPLIANCE

Knowles routinely monitors worldwide material restrictions (e.g., EU/China and Korea RoHS mandates) and is actively involved in shaping future legislation. All standard C0G/NP0, X7R, X5R and High Q Knowles MLCC products are compliant with the EU RoHS directive (see below for special exceptions) and those with plated terminations are suitable for soldering using common lead-free solder alloys (refer to "Soldering Information" for more details on soldering limitations). Compliance with the EU RoHS directive automatically signifies compliance with some other legislation (e.g., China and Korea RoHS). Please refer to the Knowles Precision Devices Sales Office for details of compliance with other materials legislation.

Breakdown of material content, SGS analysis reports and tin whisker test results are available on request. Most Knowles MLCC components are available with non-RoHS compliant tin lead (SnPb) solderable termination finish for exempt applications and where pure tin is not acceptable. Other tin-free termination finishes may also be available – please refer to the Knowles Precision Devices Sales Office for further details. Radial components have tin plated leads as standard, but tin/lead is available as a special option. Please refer to the radial section of the catalog for further details.

X8R ranges <250Vdc are not RoHS 2011/65/EU compliant. Check the website, knowlescapacitors.com for latest RoHS update.

## EXPORT CONTROLS AND DUAL-USE REGULATIONS

Certain Knowles catalog components are defined as "dual-use" items under international export controls — those that can be used for civil or military purposes which meet certain specified technical standards. The defining criteria for a dual-use component with respect to Knowles Capacitor products is one with a voltage rating of >750Vdc and a capacitance value of >250nF when measured at 750Vdc and a series inductance <10nH. Components defined as dual-use under the above criteria may require a licence for export across international borders. Please contact the Sales Office for further information on specific part numbers.





# Explanation of Aging of MLC

## AGING

Capacitor aging is a term used to describe the negative, logarithmic capacitance change that takes place in ceramic capacitors with time. The crystalline structure for barium titanate based ceramics changes on passing through its Curie temperature (known as the Curie Point) at about 125°C. This domain structure relaxes with time and in doing so, the dielectric constant reduces logarithmically; this is known as the aging mechanism of the dielectric constant. The more stable dielectrics have the lowest aging rates.


The aging process is reversible and repeatable. Whenever the capacitor is heated to a temperature above the Curie Point, the aging process starts again from zero.

The aging constant, or aging rate, is defined as the percentage loss of capacitance due to the aging process of the dielectric that occurs during a decade of time (a tenfold increase in age) and is expressed as percent per logarithmic decade of hours. As the law of decrease of capacitance is logarithmic, this means that in a capacitor with an aging rate of 1% per decade of time, the capacitance will decrease at a rate of:

- a) 1% between 1 and 10 hours
- b) An additional 1% between the following 10 and 100 hours
- c) An additional 1% between the following 100 and 1,000 hours
- d) An additional 1% between the following 1,000 and 10,000 hours, etc.
- e) The aging rate continues in this manner throughout the capacitor's life

Typical values of the aging constant for our Multilayer Ceramic Capacitors are:

| Dielectric class     | Typical values                            |
|----------------------|---|
| Ultra Stable COG/NPO | Negligible capacitance loss through aging |
| Stable X7R           | <2% per decade of time                    |

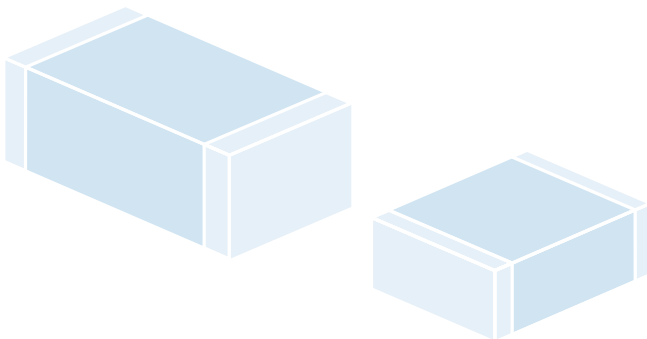

## CAPACITANCE MEASUREMENTS


Because of aging it is necessary to specify an age for reference measurements at which the capacitance shall be within the prescribed tolerance. This is fixed at 1,000 hours, since for practical purposes there is not much further loss of capacitance after this time.

All capacitors shipped are within their specified tolerance at the standard reference age of 1,000 hours after having cooled through their Curie temperature.

The aging curve for any ceramic dielectric is a straight line when plotted on semi-log paper.

## CAPACITANCE VS. TIME

(Aging X7R @ <2% per decade)

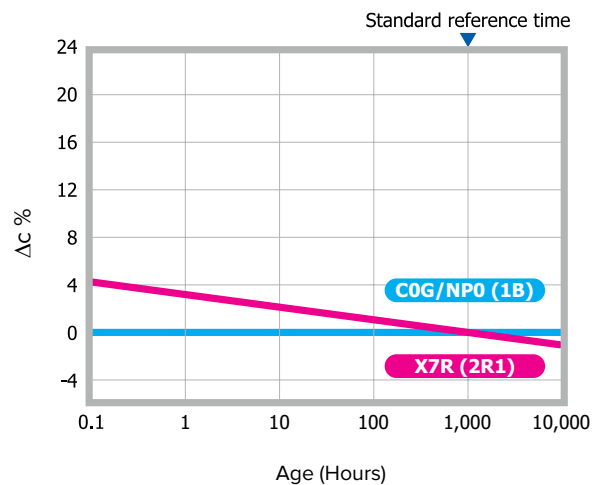

## TIGHT TOLERANCE

One of the advantages of Knowles' unique "wet process" of manufacture is the ability to offer capacitors with exceptionally tight capacitance tolerances.

The accuracy of the printing screens used in the fully automated, computer controlled manufacturing process allows for tolerance as close as +/-1% on COG/NPO parts greater than or equal to 10pF. For capacitance values below <4.7pF, tolerances can be as tight as +/-0.05pF.





# Mounting, Soldering, Storage and Mechanical Precautions

Detailed application notes intended to guide and assist our customers in using multilayer ceramic capacitors in surface mount technology are available on the Knowles website at [knowlesc capacitors.com](http://knowlesc capacitors.com). The information concentrates on the handling, mounting, connection, cleaning, test and rework requirements particular to MLCs for SMD technology, to ensure a suitable match between component capability and user expectation. Some extracts are given below.

## MECHANICAL CONSIDERATIONS FOR MOUNTED CERAMIC CHIP CAPACITORS

Due to their brittle nature, ceramic chip capacitors are more prone to excesses of mechanical stress than other components used in surface mounting. One of the most common causes of failure is directly attributable to bending the printed circuit board after solder attachment. The excessive or sudden movement of the flexible circuit board stresses the inflexible ceramic block, causing a crack to appear at the weakest point, usually the ceramic/termination interface. The crack may initially be quite small and not penetrate into the inner electrodes; however, subsequent handling and rapid changes in temperature may cause the crack to enlarge.

This mode of failure is often invisible to normal inspection techniques as the resultant cracks usually lie under the capacitor terminations, but if left, can lead to catastrophic failure. More importantly, mechanical cracks, unless they are severe, may not be detected by normal electrical testing of the completed circuit, failure only occurring at some later stage after moisture ingression.

The degree of mechanical stress generated on the printed circuit board is dependent upon several factors, including the board material and thickness, the amount of solder and land pattern. The amount of solder applied is important, as an excessive amount reduces the chip's resistance to cracking.

It is Knowles' experience that more than 90% are due to board depanelization, a process where two or more circuit boards are separated after soldering is complete. Other manufacturing stages that should be reviewed include:

- 1) Attaching rigid components such as connectors, relays, display panels, heat sinks etc.,
- 2) Fitting conventional leaded components. Special care must be exercised when rigid terminals, as found on large can electrolytic capacitors, are inserted.
- 3) Storage of boards in such a manner that allows warping.
- 4) Automatic test equipment, particularly the type employing "bed of nails" and support pillars.
- 5) Positioning the circuit board in its enclosure, especially where this is a "snap-fit."

Knowles was the first MLCC manufacturer to launch a flexible termination to significantly reduce the instances of mechanical cracking. FlexiCap™ termination introduces a certain amount of give into the termination layer, absorbing damaging stress. Unlike similar systems, FlexiCap™ does not tear under tension, but absorbs the stress, so maintaining the characteristics of the MLCC.

## SM PAD DESIGN

Knowles conventional 2-terminal chip capacitors can generally be mounted using pad designs in accordance with IPC-7351, Generic Requirements for Surface Mount Design and Land Pattern Standards, but there are some other factors that have been shown to reduce mechanical stress, such as reducing the pad width to less than the chip width. In addition, the position of the chip on the board should also be considered.

3-Terminal components are not specifically covered by IPC-7351, but recommended pad dimensions are included in the Knowles catalogue / website for these components.

## ALTERNATIVE PRINTED WIRE BOARD LAND PATTERNS

Printed Wire Board land pattern design for chip components is critical to ensure a reliable solder fillet, and to reduce nuisance type manufacturing problems such as component swimming and tombstoning. The land pattern suggested can be used for reflow and wave solder operations as noted. Land patterns constructed with these dimensions will yield optimized solder fillet formation and thus reduce the possibility of early failure.<sup>1</sup>

<sup>1</sup> Frances Classon, James Root, Martin Marietta Orlando Aerospace, "Electronics Packaging and Interconnection Handbook".

$$A = (\text{Max Length}) + 0.030" (.762\text{mm})^*$$


$$B = (\text{Max Width}) + 0.010" (.254\text{mm})^{**}$$

$$C = (\text{Min Length}) - 2 (\text{Nominal Band})^{***}$$

\* Add 0.030" for Wave Solder operations.

\*\* Replace "Max Width" with "Max Thickness" for vertical mounting.

\*\*\* "C" to be no less than 0.02", change "A" to (Max Length) + 0.020".




For C04 "C" to be no less than 0.01".

## MLC ORIENTATION — HORIZONTAL AND VERTICAL MOUNTING

The orientation of the MLC relative to the ground plane affects the device's impedance. When the internal electrodes are parallel to the ground plane (horizontal mounting), the impedance of the MLC resembles a folded transmission line driven from one end.

The graphs below show the modeled insertion loss and parallel resonances of Knowles product C17AH101K-7UN-X0T with horizontal mounting (modeling can be done in CapCad). When the internal electrodes are perpendicular to the ground plane (vertical mounting, bottom graph), the MLC impedance resembles a folded transmission line driven from the center, reducing resonance effects.

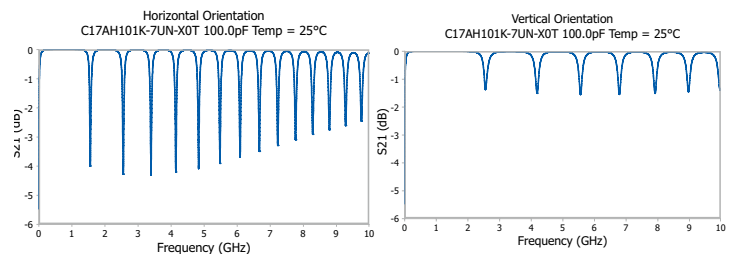

# Mounting, Soldering, Storage and Mechanical Precautions

Knowles MLCCs are compatible with all recognized soldering/mounting methods for chip capacitors. Specific application notes on mounting and soldering Knowles components are included on the website for each brand.

- For DLI brand components, please see DLI application note “Recommended Solder Attachment Techniques for MLC Chip and Pre-Tinned Capacitors” located at: [knowlescapacitors.com](http://knowlescapacitors.com)
- For Syfer brand components, please see Syfer application note AN0028 “Soldering/Mounting Chip Capacitors, Radial Leaded Capacitors and EMI Filters” located at: [knowlescapacitors.com](http://knowlescapacitors.com)
- For Novacap brand products, please refer to the appropriate application note located at: [knowlescapacitors.com](http://knowlescapacitors.com)

The volume of solder applied to the chip capacitor can influence the reliability of the device. Excessive solder can create thermal and tensile stresses on the component, which can lead to fracturing of the chip or the solder joint itself. Insufficient or uneven solder application can result in weak bonds, rotation of the device off line or lifting of one terminal off the pad (tombstoning). The volume of solder is process and board pad size dependent. Soldering methods commonly used in industry are Reflow Soldering, Wave Soldering and, to a lesser extent, Vapor Phase Soldering. All these methods involve thermal cycling of the components and therefore the rate of heating and cooling must be controlled to preclude thermal shocking of the devices.

Without mechanical restriction, thermally induced stresses are released once the capacitor attains a steady state condition. Capacitors bonded to substrates, however, will retain some stress, due primarily to the mismatch of expansion of the component to the substrate; the residual stress on the chip is also influenced by the ductility and hence the ability of the bonding medium to relieve the stress. Unfortunately, the thermal expansion of chip capacitors differs significantly from those of most substrate materials. Large chips are more prone to thermal shock as their greater bulk will result in sharper thermal gradients within the device during thermal cycling. Large units experience excessive stress if processed through the fast cycles typical of solder wave or vapor phase operations.

## REFLOW SOLDERING SURFACE MOUNT CHIP CAPACITORS

Knowles recommends reflow soldering as the preferred method for mounting MLCCs. Knowles MLCCs can be reflow soldered using a reflow profile generally as defined in IPC/JEDEC J-STD-020. Sn plated termination chip capacitors are compatible with both conventional and lead-free soldering, with peak temperatures of 260°C to 270°C acceptable. The heating ramp rate should be such that components see a temperature rise of 1.5°C to 4°C per seconds to maintain temperature uniformity through the MLCC. The time for which the solder is molten should be maintained at a minimum, so as to prevent solder leaching. Extended times above 230°C can cause problems with oxidation of Sn plating. Use of inert atmosphere can help if this problem is encountered. PdAg terminations can be particularly susceptible to leaching with lead-free, tin-rich solders and trials are recommended for this combination. Cooling to ambient temperature should be allowed to occur naturally, particularly if larger chip sizes are being soldered. Natural cooling allows a gradual relaxation of thermal mismatch stresses in the solder joints. Forced cooling should be avoided as this can induce thermal breakage.

## WAVE SOLDERING SURFACE MOUNT CHIP CAPACITORS

Wave soldering is generally acceptable, but the thermal stresses caused by the wave have been shown to lead to potential problems with larger or thicker chips. Particular care should be taken when soldering SM chips larger than size 1210 and with a thickness greater than 1.0mm for this reason. 0402 size components are not suitable for wave soldering. 0402 size components can also be susceptible to termination leaching, and reflow soldering is recommended for this size MLCC.

Wave soldering exposes the devices to a large solder volume, hence the pad size area must be restricted to accept an amount of solder that is not detrimental to the chip size utilized. Typically the pad width is 66% of the component width, and the length is .030" (.760mm) longer than the termination band on the chip. A 0805 chip, which is .050" wide and has a .020" termination band therefore requires a pad .033" wide by .050" in length. Opposing pads should be identical in size to preclude uneven solder fillets and mismatched surface tension forces, which can misalign the device. It is preferred that the pad layout results in alignment of the long axis of the chips at right angles to the solder wave, to promote even wetting of all terminals. Orientation of components in line with the board travel direction may require dual waves with solder turbulence to preclude cold solder joints on the trailing terminals of the devices, as these are blocked from full exposure to the solder by the body of the capacitor.

The preheat ramp should be such that the components see a temperature rise of 1.5°C to 4°C per second as for reflow soldering. This is to maintain temperature uniformity through the MLCC and prevent the formation of thermal gradients within the ceramic. The preheat temperature should be within 120°C maximum (100°C preferred) of the maximum solder temperature to minimize thermal shock. Maximum permissible wave temperature is 270°C for SM chips. Total immersion exposure time for Sn/Ni terminations is 30s at a wave temperature of 260°C. Note that for multiple soldering operations, including the rework, the soldering time is cumulative. The total immersion time in the solder should be kept to a minimum. It is strongly recommended that plated terminations are specified for wave soldering applications. PdAg termination is particularly susceptible to leaching when subjected to lead-free wave soldering and is not generally recommended for this application. Cooling to ambient temperature should be allowed to occur naturally, particularly if larger chip sizes are being soldered. Natural cooling allows a gradual relaxation of thermal mismatch stresses in the solder joints. Forced cooling should be avoided as this can induce thermal breakage.

## VAPOR PHASE SOLDERING CHIP CAPACITORS

Vapor phase soldering can expose capacitors to similar thermal shock and stresses as wave soldering, and the advice is generally the same. Particular care should be taken in soldering large capacitors to avoid thermal cracks being induced and natural cooling should be used to allow a gradual relaxation of stresses.

## HAND SOLDERING AND REWORK OF CHIP CAPACITORS

Attachment using a soldering iron requires extra care and is accepted to have a risk of cracking of the chip. Precautions include preheating of the assembly to within 100°C of the solder flow temperature and the use of a fine tip iron that does not exceed 30 watts. In no circumstances should the tip of the iron be allowed to contact the chip directly. Knowles recommends hot air/gas as the preferred method for applying heat for rework. Apply even heat surrounding the component to minimize internal thermal gradients. Minimize the rework heat duration and allow components to cool naturally after soldering.



# Mounting, Soldering, Storage and Mechanical Precautions

## WAVE SOLDERING RADIAL LEADED CHIP CAPACITORS

Radial leaded capacitors are suitable for wave soldering when mounted on the opposite side of the board to the wave. The body of radial components should not be exposed directly to the wave. Maximum permissible wave temperature is 260°C for Radial leaded capacitors.

## HAND SOLDERING RADIAL LEADED CAPACITORS

Radial capacitors can be hand soldered into boards using soldering irons, provided care is taken not to touch the body of the capacitor with the iron tip. Soldering should be carried out from the opposite side of the board to the radial to minimize the risk of damage to the capacitor body. Where possible, a heat sink should be used between the solder joint and the body, especially if longer dwell times are required.

## SOLDER LEACHING

Leaching is the term for the dissolution of silver into the solder, causing a failure of the termination system, which causes increased ESR,  $\tan \delta$  and open circuit faults, including, ultimately, the possibility of the chip becoming detached. Leaching occurs more readily with higher temperature solders and solders with a high tin content. Pb-free solders can be very prone to leaching certain termination systems. To prevent leaching, exercise care when choosing solder alloys and minimize both maximum temperature and dwell time with the solder molten.

Plated terminations with nickel or copper anti-leaching barrier layers are available in a range of top coat finishes to prevent leaching from occurring. These finishes also include Syfer FlexiCap™ for improved stress resistance post soldering.

## BONDING

Hybrid assembly using conductive epoxy or wire bonding requires the use of silver palladium or gold terminations. Nickel barrier termination is not practical in these applications, as intermetallics will form between the dissimilar metals. The ESR will increase over time and may eventually break contact when exposed to temperature cycling.

## CLEANING

Chip capacitors can withstand common agents such as water, alcohol and degreaser solvents used for cleaning boards. Ascertain that no flux residues are left on the chip surfaces as these diminish electrical performance.

## HANDLING

Ceramics are dense, hard, brittle and abrasive materials. They are liable to suffer mechanical damage, in the form of chips or cracks, if improperly handled.

Terminations may be abraded onto chip surfaces if loose chips are tumbled in bulk. Metallic tracks may be left on the chip surfaces, which might pose a reliability hazard.

Components should never be handled with fingers; perspiration and skin oils can inhibit solderability and will aggravate cleaning.

Chip capacitors should never be handled with metallic instruments. Metal tweezers should never be used as these can chip the product and may leave abraded metal tracks on the product surface.

Plastic or plastic coated metal types are readily available and recommended — these should be used with an absolute minimum of applied pressure.

Counting or visual inspection of chip capacitors is best performed on a clean glass or hard plastic surface. If chips are dropped or subjected to rough handling, they should be visually inspected before use. Electrical inspection may also reveal gross damage via a change in capacitance, an increase in dissipation factor or a decrease either in insulation resistance or electrical strength.

## TRANSPORTATION

Where possible, any transportation should be carried out with the product in its unopened original packaging. If already opened, any environmental control agents supplied should be returned to packaging and the packaging resealed.

Avoid paper and card as a primary means of handling, packing, transportation and storage of loose components. Many grades have a sulphur content that will adversely affect termination solderability. Loose chips should always be packed with sulphur-free wadding to prevent impact or abrasion damage during transportation.

## STORAGE


Incorrect storage of components can lead to problems for the user. Rapid tarnishing of the terminations, with an associated degradation of solderability, will occur if the product comes into contact with industrial gases such as sulphur dioxide and chlorine. Storage in free air, particularly moist or polluted air, can result in termination oxidation.

Packaging should not be opened until the MLCs are required for use. If opened, the pack should be resealed as soon as is practicable. Alternatively, the contents could be kept in a sealed container with an environmental control agent. Long-term storage conditions, ideally, should be temperature controlled between -5°C and +40°C and humidity controlled between 40% and 60% RH. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesive performance. Product, stored under the conditions recommended above, in its “as received” packaging has a minimum shelf life of 2 years.



# Chip Marking System

Most, but not all, MLCCs can be supplied marked to indicate the capacitance value on request. Parts smaller than 1812 will generally use laser marking, chips sizes larger will use laser or ink marking at the Knowles' discretion. Neither system causes surface degradation and the ink is chosen to withstand most conventional MLCC cleaning processes. Some values of size/voltage may not be suitable for marking due to internal design parameters.



Capacitance is shown using one of the following methods, depending on the size of the component:

- 2 digit EIA-198 code (see table below, e.g., N1 = 33pF). Where space allows, the brand identifier may also be applied (e.g., N = Novacap brand).
- 3-digit capacitance code as part number (e.g., 0330 = 33pF)
- Brand identifier, 3-digit capacitance code and tolerance (e.g., S/0330J = Syfer Brand, 33pF ± 5%)

Two position alpha-numeric marking is available on chip sizes 0603 and larger. The marking denotes retma value and significant figures of capacitance (see table)  
e.g., A5 = 100,000pF.

Three position alpha-numeric marking is available on chip sizes 1206 and larger.


## MARKING CODE – VALUE IN PICO FARADS FOR ALPHA-NUMERIC CODE

| Number | 0   | 1   | 2   | 3     | 4      | 5       | 6         | 7          | 9          |      |
|--------|-----|-----|-----|-------|--------|---------|-----------|------------|------------|------|
| Letter | A   | 1.0 | 10  | 100   | 1,000  | 10,000  | 100,000   | 1,000,000  | 10,000,000 | 0.10 |
|        | B   | 1.1 | 11  | 110   | 1,100  | 11,000  | 110,000   | 1,100,000  | 11,000,000 | 0.11 |
|        | C   | 1.2 | 12  | 120   | 1,200  | 12,000  | 120,000   | 1,200,000  | 12,000,000 | 0.12 |
|        | D   | 1.3 | 13  | 130   | 1,300  | 13,000  | 130,000   | 1,300,000  | 13,000,000 | 0.13 |
|        | E   | 1.5 | 15  | 150   | 1,500  | 15,000  | 150,000   | 1,500,000  | 15,000,000 | 0.15 |
|        | F   | 1.6 | 16  | 160   | 1,600  | 16,000  | 160,000   | 1,600,000  | 16,000,000 | 0.16 |
|        | G   | 1.8 | 18  | 180   | 1,800  | 18,000  | 180,000   | 1,800,000  | 18,000,000 | 0.18 |
|        | H   | 2.0 | 20  | 200   | 2,000  | 20,000  | 200,000   | 2,000,000  | 20,000,000 | 0.20 |
|        | J   | 2.2 | 22  | 220   | 2,200  | 22,000  | 220,000   | 2,200,000  | 22,000,000 | 0.22 |
|        | K   | 2.4 | 24  | 240   | 2,400  | 24,000  | 240,000   | 2,400,000  | 24,000,000 | 0.24 |
|        | L   | 2.7 | 27  | 270   | 2,700  | 27,000  | 270,000   | 2,700,000  | 27,000,000 | 0.27 |
|        | M   | 3.0 | 30  | 300   | 3,000  | 30,000  | 300,000   | 3,000,000  | 30,000,000 | 0.30 |
|        | N   | 3.3 | 33  | 330   | 3,300  | 33,000  | 330,000   | 3,300,000  | 33,000,000 | 0.33 |
|        | P   | 3.6 | 36  | 360   | 3,600  | 36,000  | 360,000   | 3,600,000  | 36,000,000 | 0.36 |
|        | Q   | 3.9 | 39  | 390   | 3,900  | 39,000  | 390,000   | 3,900,000  | 39,000,000 | 0.39 |
|        | R   | 4.3 | 43  | 430   | 4,300  | 43,000  | 430,000   | 4,300,000  | 43,000,000 | 0.43 |
|        | S   | 4.7 | 47  | 470   | 4,700  | 47,000  | 470,000   | 4,700,000  | 47,000,000 | 0.47 |
|        | T   | 5.1 | 51  | 510   | 5,100  | 51,000  | 510,000   | 5,100,000  | 51,000,000 | 0.51 |
|        | U   | 5.6 | 56  | 560   | 5,600  | 56,000  | 560,000   | 5,600,000  | 56,000,000 | 0.56 |
|        | V   | 6.2 | 62  | 620   | 6,200  | 62,000  | 620,000   | 6,200,000  | 62,000,000 | 0.62 |
|        | W   | 6.8 | 68  | 680   | 6,800  | 68,000  | 680,000   | 6,800,000  | 68,000,000 | 0.68 |
|        | X   | 7.5 | 75  | 750   | 7,500  | 75,000  | 750,000   | 7,500,000  | 75,000,000 | 0.75 |
|        | Y   | 8.2 | 82  | 820   | 8,200  | 82,000  | 820,000   | 8,200,000  | 82,000,000 | 0.82 |
|        | Z   | 9.1 | 91  | 910   | 9,100  | 91,000  | 920,000   | 9,200,000  | 92,000,000 | 0.91 |
|        | a   | 2.5 | 25  | 250   | 2,500  | 25,000  | 250,000   | 2,500,000  | 25,000,000 | 0.25 |
|        | b   | 3.5 | 35  | 350   | 3,500  | 35,000  | 350,000   | 3,500,000  | 35,000,000 | 0.35 |
| d      | 4.0 | 40  | 400 | 4,000 | 40,000 | 400,000 | 4,000,000 | 40,000,000 | 0.40       |      |
| e      | 4.5 | 45  | 450 | 4,500 | 45,000 | 450,000 | 4,500,000 | 45,000,000 | 0.45       |      |
| f      | 5.0 | 50  | 500 | 5,000 | 50,000 | 500,000 | 5,000,000 | 50,000,000 | 0.50       |      |
| m      | 6.0 | 60  | 600 | 6,000 | 60,000 | 600,000 | 6,000,000 | 60,000,000 | 0.60       |      |
| n      | 7.0 | 70  | 700 | 7,000 | 70,000 | 700,000 | 7,000,000 | 70,000,000 | 0.70       |      |
| t      | 8.0 | 80  | 800 | 8,000 | 80,000 | 800,000 | 8,000,000 | 80,000,000 | 0.80       |      |
| y      | 9.0 | 90  | 900 | 9,000 | 90,000 | 900,000 | 9,000,000 | 90,000,000 | 0.90       |      |




# Ceramic Chip Capacitors — Packaging Information

Tape and reel packing of surface mounting chip capacitors for automatic placement are in accordance with IEC60286-3.

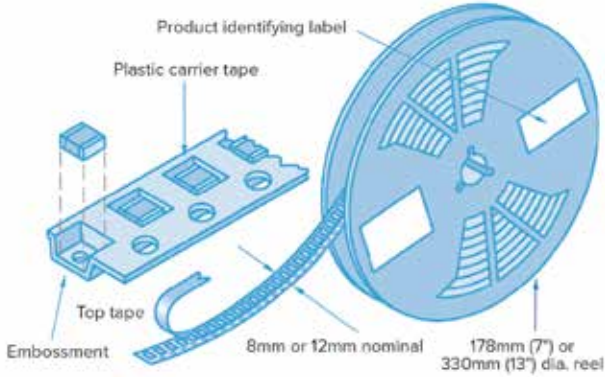

Dimensions mm (inches)

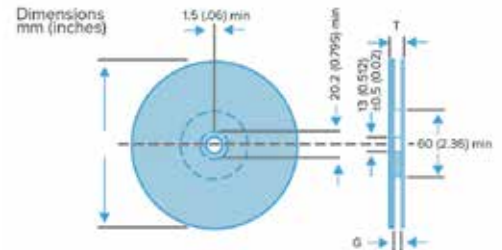

## PEEL FORCE

The peel force of the top sealing tape is between 0.2 and 1.0 Newton at 180°. The breaking force of the carrier and sealing tape in the direction of unreeling is greater than 10 Newtons.

## IDENTIFICATION


Each reel is labeled with the following information: manufacturer, chip size, capacitance, tolerance, rated voltage, dielectric type, batch number, date code and quantity of components.

## MISSING COMPONENTS


Maximum number of missing components shall be 1 per reel or 0.025%, whichever is greater. There shall not be consecutive components missing from any reel for any reason.

| Symbol | Description   | 178mm reel      | 330mm reel      |
|--------|---------------|-----------------|-----------------|
| A      | Diameter      | 178 (7)         | 330 (13)        |
| G      | Inside width  | 8.4 (0.33)      | 12.4 (0.49)     |
| T      | Outside width | 14.4 (0.56) max | 18.4 (0.72) max |

## LEADER AND TRAILER

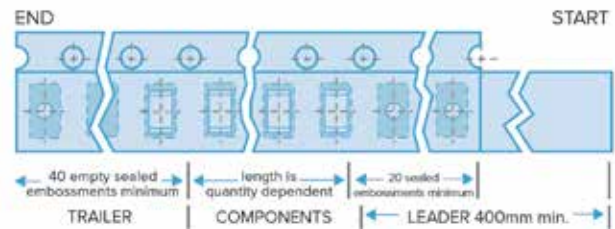

## TAPE DIMENSIONS

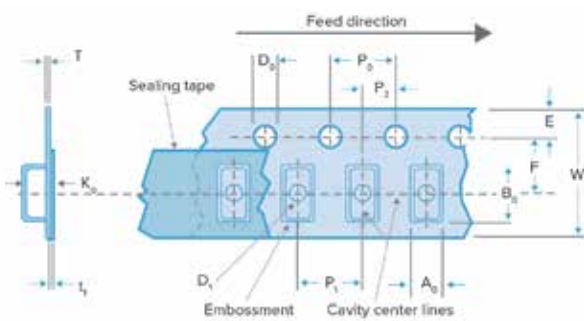

|                |  | Dimensions mm (inches)                      |                          |
|----------------|--|---|--------------------------|
| Symbol         | Description  | 8mm tape                                    | 12mm tape                |
| A <sub>0</sub> | Width of cavity  | Dependent on chip size to minimize rotation |                          |
| B <sub>0</sub> | Length of cavity   | Dependent on chip size to minimize rotation |                          |
| K <sub>0</sub> | Depth of cavity  | Dependent on chip size to minimize rotation |                          |
| W              | Width of tape  | 8.0 (0.315)                                 | 12.0 (0.472)             |
| F              | Distance between drive hole centers and cavity centers       | 3.5 (0.138)                                 | 5.5 (0.213)              |
| E              | Distance between drive hole centers and tape edge            | 1.75 (0.069)                                |                          |
| P <sub>1</sub> | Distance between cavity centers                              | 4.0 (0.156)                                 | 8.0 (0.315)              |
| P <sub>2</sub> | Axial distance between drive hole centers and cavity centers | 2.0 (0.079)                                 |                          |
| P <sub>0</sub> | Axial distance between drive hole centers                    | 4.0 (0.156)                                 |                          |
| D <sub>0</sub> | Drive hole diameter  | 1.5 (0.059)                                 |                          |
| D <sub>1</sub> | Diameter of cavity piercing                                  | 1.0 (0.039)                                 | 1.5 (0.059)              |
| T              | Carrier tape thickness                                       | 0.3 (0.012) ±0.1 (0.004)                    | 0.4 (0.016) ±0.1 (0.004) |
| t <sub>1</sub> | Top tape thickness   | 0.1 (0.004) max                             |                          |




# Ceramic Chip Capacitors — Packaging Information

## COMPONENT ORIENTATION

Tape and reeling is in accordance with IEC 60286 part 3, which defines the packaging specifications of leadless components on continuous tapes.

Notes:

- 1) IEC60286-3 states  $A_o \leq B_o$  (see tape dimensions on page 21).
- 2) Regarding the orientation of 1825 and 2225 components, the termination bands are right to left, NOT front to back. Please see diagram.

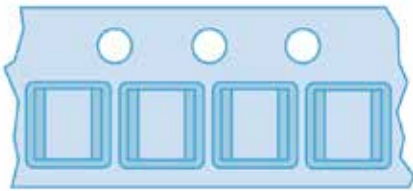


Orientation of 1825 & 2225 components

## OUTER PACKAGING

OUTER CARTON DIMENSIONS MM (INCHES) MAX.

| Reel Size  | No. of reels | L           | W           | T         |
|------------|--------------|-------------|-------------|-----------|
| 178 (7.0)  | 1            | 185 (7.28)  | 185 (7.28)  | 25 (0.98) |
| 178 (7.0)  | 4            | 190 (7.48)  | 195 (7.76)  | 75 (2.95) |
| 330 (13.0) | 1            | 335 (13.19) | 335 (13.19) | 25 (0.98) |

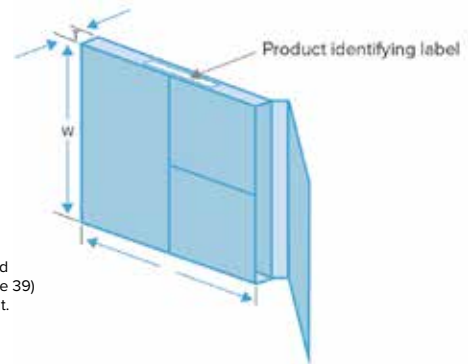

Note: Labeling of box and reel with bar codes (Code 39) available by arrangement.

## STANDARD REEL QUANTITIES — NOVACAP, SYFER AND VOLTRONICS PRODUCTS

| Chip size           | 0402  | 0505  | 0603  | 0805  | 1111  | 1206  | 1210  | 1410  | 1515  | 1808  | 1812  | 1825   | 2211 | 2215 | 2220   | 2221  | 2225   | 2520  | 3333  | 3530  | 3640   | 4540 | 5550 | 6560 | 7565 |     |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|------|------|--------|-------|--------|-------|-------|-------|--------|------|------|------|------|-----|
| Max. chip thickness |       |       |       |       |       |       |       |       |       |       |       |        |      |      |        |       |        |       |       |       |        |      |      |      |      |     |
| mm                  | 0.61  | 1.3   | 0.89  | 1.37  | 1.8   | 1.63  | 2.0   | 2.0   | 3.3   | 2.0   | 3.2   | 4.2    | 2.5  | 2.5  | 4.2    | 2.0   | 4.2    | 4.57  | 6.35  | 6.35  | 4.2    | 7.62 | 7.62 | 7.62 | 7.62 |     |
| inches              | 0.02" | 0.05" | 0.03" | 0.05" | 0.07" | 0.06" | 0.08" | 0.08" | 0.13" | 0.08" | 0.13" | 0.165" | 0.1" | 0.1" | 0.165" | 0.08" | 0.165" | 0.18" | 0.25" | 0.25" | 0.165" | 0.3" | 0.3" | 0.3" | 0.3" |     |
| Reel quantities     |       |       |       |       |       |       |       |       |       |       |       |        |      |      |        |       |        |       |       |       |        |      |      |      |      |     |
| 178mm (7")          | 10k   | 2500  | 4000  | 3000  | 1000  | 2500  | 2000  | 2000  | 500   | 1500  | 500   | 500    | 750  | 500  | 500    | 1000  | 500    | 1000  | -     | -     | -      | -    | -    | -    | -    | -   |
| 330mm (13")         | 15k   | 10k   | 16k   | 12k   | 5000  | 10k   | 8000  | 8000  | -     | 6000  | 2000  | 2000   | 2000 | 2000 | 2000   | -     | 2000   | 1000  | 1000  | 500   | 500    | 500  | 500  | 500  | 200  | 200 |


Note: Chip thickness may affect reel quantity.

## PACKAGING CONFIGURATIONS — DLI PRODUCTS

| Style | Chip Size<br>L x W | 7" Reel, 8mm Tape         |                         | 7" Reel,<br>16mm Tape | 13" Reel,<br>16mm Tape | 2" x 2"<br>Waffle<br>Pack |
|-------|--------------------|---------------------------|-------------------------|-----------------------|------------------------|---------------------------|
|       |                    | Horizontal<br>Orientation | Vertical<br>Orientation |                       |                        |                           |
| C04   | 0.040" x 0.020"    | 4000                      | -                       | -                     | -                      | -                         |
| C06   | 0.060" x 0.030"    | 4000                      | -                       | -                     | -                      | 108                       |
| C07   | 0.110" x 0.070"    | 2000                      | -                       | -                     | -                      | -                         |
| C08   | 0.080" x 0.050"    | 5000                      | 3100                    | -                     | -                      | 108                       |
| C11   | 0.055" x 0.055"    | 3500                      | 3100                    | -                     | -                      | 108                       |
| C17   | 0.110" x 0.110"    | 2350                      | 750                     | -                     | -                      | 49                        |
| C18   | 0.110" x 0.110"    | 2350                      | 750                     | -                     | -                      | 49                        |
| C22   | 0.220" x 0.245"    | 500                       | -                       | -                     | -                      | -                         |
| C40   | 0.380" x 0.380"    | 250                       | -                       | 250                   | 1300                   | -                         |

## BULK PACKAGING, TUBS

Chips can be supplied in rigid resealable plastic tubs together with impact cushioning wadding. Tubs are labeled with the details: chip size, capacitance, tolerance, rated voltage, dielectric type, batch number, date code and quantity of components.

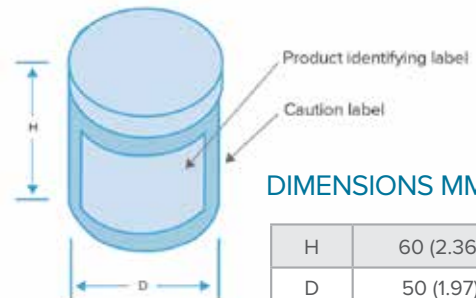


DIMENSIONS MM (INCHES)

|   |           |
|---|-----------|
| H | 60 (2.36) |
| D | 50 (1.97) |



# Chip Dimensions



1. For FlexiCap™ terminations, length increases by maximum 0.004" (0.1mm).
2. Dimensions for High Q, Ultra-low ESR and Non-magnetic parts may vary for optimum performance.  
For accurate part dimensions, use the Part Builder or Part Search application on the Knowles website to generate a component datasheet.
3. Non-standard thicknesses are available – consult your local Knowles Precision Devices sales office.

| Size   | Length (L1)                          | Width (W)                     | Max. Thickness (T) | Termination Band (L2) |                   |
|--------|--------------------------------------|-------------------------------|--------------------|-----------------------|-------------------|
|        | mm ~ inches                          | mm ~ inches                   | mm ~ inches        | min (mm ~ inches)     | max (mm ~ inches) |
| 0402   | 1.0 ± 0.10 ~ 0.04 ± 0.004            | 0.50 ± 0.10 ~ 0.02 ± 0.004    | 0.60 ~ 0.024       | 0.10 ~ 0.004          | 0.40 ~ 0.016      |
| C04    | 1.057 ± 0.188 ~ 0.042 ± 0.008        | 0.515 ± 0.153 ~ 0.02 ± 0.006  | 0.64 ~ 0.025       | 0.097 ~ 0.004         | 0.427 ~ 0.017     |
| 0504   | 1.27 ± 0.152 ~ 0.050 ± 0.006         | 1.02 ± 0.152 ~ 0.04 ± 0.006   | 1.12 ~ 0.044       | 0.20 ~ 0.008          | 0.50 ~ 0.02       |
| 0505   | 1.4 +0.35/-0.25 ~ 0.055 +0.014/-0.01 | 1.4 ± 0.25 ~ 0.055 ± 0.01     | 1.27 ~ 0.05        | 0.13 ~ 0.005          | 0.5 ~ 0.02        |
| RF0505 | 1.4 +0.38/-0.25 ~ 0.055 +0.015/-0.01 | 1.4 ± 0.381 ~ 0.055 ± 0.015   | 1.45 ~ 0.057       | 0.20 ~ 0.008          | 0.50 ~ 0.02       |
| C11    | 1.477 ± 0.391 ~ 0.059 ± 0.016        | 1.416 ± 0.451 ~ 0.056 ± 0.018 | 1.334 ~ 0.053      | 0.193 ~ 0.008         | 0.733 ~ 0.029     |
| 0603   | 1.6 ± 0.15 ~ 0.063 ± 0.006           | 0.8 ± 0.15 ~ 0.032 ± 0.006    | 0.90 ~ 0.036       | 0.20 ~ 0.004          | 0.40 ~ 0.016      |
| C06    | 1.532 ± 0.229 ~ 0.06 ± 0.009         | 0.77 ± 0.191 ~ 0.031 ± 0.008  | 0.8 ~ 0.032        | 0.169 ~ 0.007         | 0.680 ~ 0.027     |
| C07    | 1.797 ± 0.470 ~ 0.071 ± 0.019        | 2.813 ± 0.521 ~ 0.111 ± 0.021 | 2.667 ~ 0.105      | 0.193 ~ 0.008         | 1.20 ~ 0.047      |
| 0805   | 2.0 ± 0.20 ~ 0.079 ± 0.008           | 1.25 ± 0.20 ~ 0.049 ± 0.008   | 1.37 ~ 0.054       | 0.25 ~ 0.010          | 0.75 ~ 0.030      |
| C08    | 2.048 ± 0.407 ~ 0.081 ± 0.016        | 1.28 ± 0.267 ~ 0.051 ± 0.011  | 1.360 ~ 0.054      | 0.362 ~ 0.014         | 1.04 ~ 0.041      |
| 0907   | 2.3 ± 0.30 ~ 0.090 ± 0.012           | 1.8 ± 0.30 ~ 0.070 ± 0.012    | 1.52 ~ 0.06        | 0.25 ~ 0.010          | 0.75 ~ 0.030      |
| 1005   | 2.54 ± 0.203 ~ 0.100 ± 0.008         | 1.27 ± 0.203 ~ 0.050 ± 0.008  | 1.37 ~ 0.054       | 0.25 ~ 0.010          | 0.75 ~ 0.030      |
| 1111   | 2.79 +0.51/-0.25 ~ 0.11 +0.02/-0.01  | 2.79 ± 0.38 ~ 0.113 ± 0.015   | 1.78 ~ 0.07        | 0.13 ~ 0.005          | 0.63 ~ 0.025      |
| RF1111 | 2.79 +0.64/-0.25 ~ 0.11 +0.025/-0.01 | 2.79 ± 0.381 ~ 0.110 ± 0.015  | 2.59 ~ 0.102       | 0.25 ~ 0.010          | 0.75 ~ 0.030      |
| C17    | 2.94 ± 0.527 ~ 0.116 ± 0.021         | 2.813 ± 0.521 ~ 0.111 ± 0.021 | 2.667 ~ 0.105      | 0.193 ~ 0.008         | 1.2 ~ 0.047       |
| C18    | 3.14 ± 0.727 ~ 0.124 ± 0.029         | 2.946 ± 0.654 ~ 0.116 ± 0.026 | 2.667 ~ 0.105      | 0.193 ~ 0.008         | 1.2 ~ 0.047       |
| 1206   | 3.2 ± 0.20 ~ 0.126 ± 0.008           | 1.6 ± 0.20 ~ 0.063 ± 0.008    | 1.70 ~ 0.068       | 0.25 ~ 0.010          | 0.75 ~ 0.030      |
| 1210   | 3.2 ± 0.20 ~ 0.126 ± 0.008           | 2.5 ± 0.20 ~ 0.098 ± 0.008    | 2.0 ~ 0.08         | 0.25 ~ 0.010          | 0.75 ~ 0.030      |
| 1515   | 3.81 ± 0.381 ~ 0.150 ± 0.015         | 3.81 ± 0.381 ~ 0.150 ± 0.015  | 3.3 ~ 0.13         | 0.381 ~ 0.015         | 1.143 ~ 0.045     |
| 1808   | 4.5 ± 0.35 ~ 0.180 ± 0.014           | 2.0 ± 0.30 ~ 0.08 ± 0.012     | 2.0 ~ 0.08         | 0.25 ~ 0.01           | 1.0 ~ 0.04        |
| 1812   | 4.5 ± 0.30 ~ 0.180 ± 0.012           | 3.2 ± 0.20 ~ 0.126 ± 0.008    | 3.2 ~ 0.125        | 0.25 ~ 0.010          | 1.143 ~ 0.045     |
| 1825   | 4.5 ± 0.30 ~ 0.180 ± 0.012           | 6.40 ± 0.40 ~ 0.252 ± 0.016   | 4.2 ~ 0.16         | 0.25 ~ 0.010          | 1.0 ~ 0.04        |
| 2020   | 5.0 ± 0.40 ~ 0.197 ± 0.016           | 5.0 ± 0.40 ~ 0.197 ± 0.016    | 4.5 ~ 0.18         | 0.25 ~ 0.01           | 1.0 ~ 0.04        |
| 2220   | 5.7 ± 0.40 ~ 0.225 ± 0.016           | 5.0 ± 0.40 ~ 0.197 ± 0.016    | 4.2 ~ 0.165        | 0.25 ~ 0.01           | 1.0 ~ 0.04        |
| 2211   | 5.7 ± 0.40 ~ 0.225 ± 0.016           | 2.79 ± 0.30 ~ 0.11 ± 0.012    | 2.5 ~ 0.1          | 0.25 ~ 0.01           | 0.8 ~ 0.03        |
| 2215   | 5.7 ± 0.40 ~ 0.225 ± 0.016           | 3.81 ± 0.35 ~ 0.35 ± 0.02     | 2.5 ~ 0.1          | 0.25 ~ 0.01           | 0.8 ~ 0.03        |
| 2221   | 5.59 ± 0.381 ~ 0.220 ± 0.015         | 5.33 ± 0.381 ~ 0.210 ± 0.015  | 2.03 ~ 0.08        | 0.381 ~ 0.015         | 1.143 ~ 0.045     |
| 2225   | 5.7 ± 0.40 ~ 0.225 ± 0.016           | 6.30 ± 0.40 ~ 0.252 ± 0.016   | 4.2 ~ 0.165        | 0.381 ~ 0.01          | 1.143 ~ 0.045     |
| C22    | 5.734 ± 0.667 ~ 0.226 ± 0.026        | 6.37 ± 0.699 ~ 0.251 ± 0.028  | 3.467 ~ 0.137      | N/A                   | N/A               |
| 2520   | 6.35 ± 0.40 ~ 0.250 ± 0.016          | 5.08 ± 0.40 ~ 0.200 ± 0.016   | 4.57 ~ 0.18        | 0.381 ~ 0.015         | 1.143 ~ 0.045     |
| RF2525 | 5.84 ± 0.51 ~ 0.230 ± 0.020          | 6.35 ± 0.381 ~ 0.250 ± 0.015  | 4.19 ~ 0.165       | 0.381 ~ 0.015         | 1.143 ~ 0.045     |
| 3333   | 8.38 ± 0.432 ~ 0.330 ± 0.017         | 8.38 ± 0.432 ~ 0.330 ± 0.017  | 6.35 ~ 0.25        | 0.381 ~ 0.015         | 1.143 ~ 0.045     |
| 3530   | 8.89 ± 0.457 ~ 0.350 ± 0.018         | 7.62 ± 0.381 ~ 0.300 ± 0.015  | 6.35 ~ 0.25        | 0.381 ~ 0.015         | 1.143 ~ 0.045     |
| 3640   | 9.2 ± 0.50 ~ 0.36 ± 0.02             | 10.16 ± 0.50 ~ 0.40 ± 0.02    | 4.5 ~ 0.18         | 0.50 ~ 0.02           | 1.50 ~ 0.06       |
| C40    | 9.732 ± 0.804 ~ 0.384 ± 0.032        | 8.665 ± 1.737 ~ 0.381 ± 0.029 | 3.467 ~ 0.137      | N/A                   | N/A               |
| 4040   | 10.2 ± 0.508 ~ 0.400 ± 0.020         | 10.2 ± 0.508 ~ 0.400 ± 0.020  | 7.62 ~ 0.30        | 0.50 ~ 0.02           | 1.50 ~ 0.06       |
| 4540   | 11.4 ± 0.584 ~ 0.450 ± 0.023         | 10.2 ± 0.508 ~ 0.400 ± 0.020  | 7.62 ~ 0.30        | 0.50 ~ 0.02           | 1.50 ~ 0.06       |
| 5440   | 13.7 ± 0.686 ~ 0.540 ± 0.027         | 10.2 ± 0.508 ~ 0.400 ± 0.020  | 7.62 ~ 0.30        | 0.50 ~ 0.02           | 1.50 ~ 0.06       |
| 5550   | 14.0 ± 0.711 ~ 0.550 ± 0.028         | 12.7 ± 0.635 ~ 0.500 ± 0.025  | 7.62 ~ 0.30        | 0.50 ~ 0.02           | 1.50 ~ 0.06       |
| 6560   | 16.5 ± 0.838 ~ 0.650 ± 0.033         | 15.2 ± 0.762 ~ 0.600 ± 0.030  | 7.62 ~ 0.30        | 0.50 ~ 0.02           | 1.50 ~ 0.06       |
| 7565   | 19.1 ± 0.965 ~ 0.750 ± 0.038         | 16.5 ± 0.838 ~ 0.650 ± 0.033  | 7.62 ~ 0.30        | 0.50 ~ 0.02           | 1.50 ~ 0.06       |
| 8060   | 20.3 ± 0.5 ~ 0.80 ± 0.02             | 15.24 ± 0.50 ~ 0.60 ± 0.02    | 4.2 ~ 0.165        | 0.50 ~ 0.02           | 1.50 ~ 0.06       |



# Chip Ordering Information — DLI Brand Parts

|               |           |            |                   |                       |   |               |             |           |   |            |          |           |
|---------------|-----------|------------|-------------------|-----------------------|---|---------------|-------------|-----------|---|------------|----------|-----------|
| <b>C</b>      | <b>17</b> | <b>CF</b>  | <b>620</b>        | <b>J</b>              | - | <b>7</b>      | <b>U</b>    | <b>N</b>  | - | <b>X</b>   | <b>0</b> | <b>T</b>  |
| MLC Capacitor | Case Size | Dielectric | Capacitance Codes | Capacitance Tolerance |   | Rated Voltage | Termination | Lead Type |   | Test Level | Marking  | Packaging |

## CASE SIZE

| Case | Dimensions      |
|------|-----------------|
| 04   | 0.040" x 0.020" |
| 06   | 0.060" x 0.030" |
| 07   | 0.110" x 0.070" |
| 08   | 0.080" x 0.050" |
| 11   | 0.055" x 0.055" |
| 17   | 0.110" x 0.110" |
| 18   | 0.110" x 0.110" |
| 22   | 0.220" x 0.250" |
| 40   | 0.380" x 0.380" |

## DIELECTRIC CODES

| Material | Characteristics      |
|----------|----------------------|
| AH       | P90 High-Q Porcelain |
| CF       | NP0 High-Q Porcelain |
| UL       | NP0 Ultra Low ESR    |

## CAPACITANCE CODES

1st two digits are significant figures of capacitance, 3rd digit denotes number of zeros, R = decimal point  
Examples:

|     |         |
|-----|---------|
| 1R0 | 1.0pF   |
| 120 | 12pF    |
| 471 | 470pF   |
| 102 | 1,000pF |

## TERMINATION CODES

| CODE | Termination System   |
|------|--|
| T    | Ag Termination, Ni Barrier Layer, Heavy SnPb Plated Solder |
| U    | Ag Termination, Ni Barrier Layer, SnPb Plated Solder       |
| S    | Ag Termination, Ni Barrier Layer, Gold Flash**             |
| Z    | Ag Termination, Ni Barrier Layer, Sn Plated Solder**       |
| E    | Ag Terier, Sn Plated Solder**                              |
| P*   | AgPd Termination**   |
| Q    | Polymer Termination, Ni Barrier Layer, Sn Plated Solder**  |
| Y    | Polymer Termination, Ni Barrier Layer, SnPb Plated Solder  |
| M*   | Polymer Termination, Cu Barrier Layer, Sn Plated Solder**  |
| W*   | Ag Termination, Cu Barrier Layer, Sn Plated Solder**       |
| H*   | Ag Termination, Enhanced Cu Barrier, Sn Plated Solder**    |
| V*   | Ag Termination, Cu Barrier Layer, SnPb Plated Solder       |
| R*   | Ag Termination, Cu Barrier Layer, Heavy SnPb Plated Solder |

\* Nonmagnetic \*\*Indicates RoHS terminations

## CAPACITANCE TOLERANCE

| Code | Value    |
|------|----------|
| A    | ± 0.05pF |
| B    | ± 0.1pF  |
| C    | ± 0.25pF |
| D    | ± 0.5pF  |
| F    | ± 1%     |
| G    | ± 2%     |
| J    | ± 5%     |
| K    | ± 10%    |
| M    | ± 20%    |
| X    | GMV      |
| S    | SPECIAL  |

<10pF A, B, C, D  
>10pF F, G, J, K, M

## VOLTAGE CODES

| Code | Value   |
|------|---------|
| 5    | 50V     |
| 1    | 100V    |
| 8    | 150V    |
| 6    | 200V    |
| 9    | 250V    |
| 3    | 300V    |
| 4    | 500V    |
| 7    | 1kV     |
| A    | 1.5kV   |
| G    | 2kV     |
| B    | 2.5kV   |
| D    | 3.6kV   |
| H    | 7.2kV   |
| S    | SPECIAL |

## TEST LEVEL

| Code | Testing                  |
|------|--------------------------|
| X    | Commercial or Industrial |
| Y    | Reduced Visual           |
| A    | MIL-PRF-55681 Group A    |
| C    | MIL-PRF-55681 Group C    |
| D    | Customer Specified       |

## LASER MARK

| Code | Laser Marking            |
|------|--------------------------|
| 0    | No Marking               |
| 1*   | Single-Side Marked       |
| 2*   | Double-Side Marked       |
| 3*   | Large Single-Side Marked |
| 4*   | Large Double-Side Marked |
| 5*   | Vertical Edge Marked     |
| 9    | Customer Specified       |

\*Reduces DWV Rating.


## LEADING

| Code | Lead Type                  |
|------|----------------------------|
| A    | Axial Ribbon               |
| B    | Radial Ribbon              |
| C    | Center Ribbon              |
| D    | Specialty Customer Defined |
| E    | Axial Wire                 |
| F    | Radial Wire                |
| N    | NONE                       |

Note: Consult your local Sales Office for RoHS-compliant leaded devices.

## PACKAGING

| Code | Packaging                |
|------|--------------------------|
| T    | Tape & Reel – Horizontal |
| V    | Tape & Reel – Vertical   |
| W    | Waffle Pack              |
| B    | Bulk                     |
| P    | Plastic Box              |
| R    | Tube (Rail)              |
| S    | Customer Specified       |

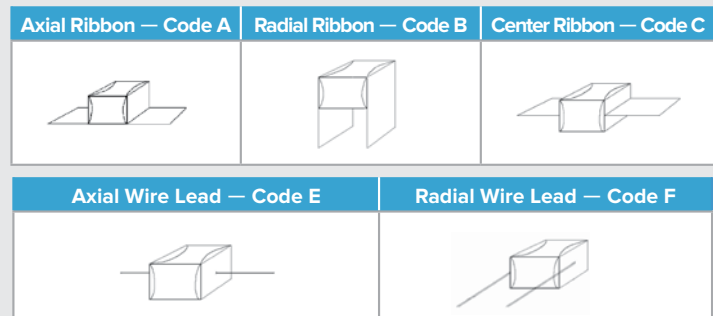



# Chip Ordering Information — Novacap Brand Parts

| XX     | 1206      | N          | 472               | J                     | 101     | N           | X050              | H                        | T         | M       | - | HB                             |
|--------|-----------|------------|-------------------|-----------------------|---------|-------------|-------------------|--------------------------|-----------|---------|---|--------------------------------|
| Prefix | Case Size | Dielectric | Capacitance Codes | Capacitance Tolerance | Voltage | Termination | Special Thickness | High Reliability Testing | Packaging | Marking |   | High Reliability Test Criteria |

## PREFIX DEFINITIONS

| None | Standard Chip                       |          |
|------|-------------------------------------|----------|
| RF   | Improved ESR Capacitor              | p. 37    |
| ST   | Stacked Capacitor Assembly          | p. 83-88 |
| SM   | Stacked Hi-Rel Capacitor Assembly   | p. 83-88 |
| CR   | Cap Rack Arrays                     | p. 89    |
| SV   | Stacked Vertical Capacitor Assembly | p. 90    |

## DIELECTRIC CODES

|       |          |                          |
|-------|----------|--------------------------|
| N     | COG/NP0  | Ultra Stable             |
| K     | R3L      | Ultra Stable             |
| B     | X7R      | Stable                   |
| W     | X5R      | Stable                   |
| X     | BX       | MIL                      |
| BB    | X7R      | Stable BME               |
| BW    | X5R      | Stable BME               |
| M     | COG/NP0  | Non-Magnetic             |
| C     | X7R      | Non-Magnetic             |
| F     | COG/NP0  | High Temp. (up to 160°C) |
| D, RD | COG/NP0  | High Temp. (up to 200°C) |
| S     | X8R      | High Temp. (up to 150°C) |
| E, RE | Class II | High Temp. (up to 200°C) |
| G     | Class II | High Temp. (up to 160°C) |
| RN    | COG/NP0  | Lead Free                |
| RB    | X7R      | Lead Free                |

## CAPACITANCE CODES

|  |     |         |
|--|-----|---------|
| 1st two digits are significant figures of capacitance, 3rd digit denotes number of zeros, R = decimal point<br>Examples: | 1R0 | 1.0pF   |
|  | 120 | 12pF    |
|  | 471 | 470pF   |
|  | 102 | 1,000pF |
|  | 273 | 0.027μF |
|  | 474 | 0.47μF  |
|  | 105 | 1.0μF   |

## SPECIAL THICKNESS

|      |   |
|------|---|
| None | Standard thickness as per Novacap catalog specifications  |
| X    | Denotes a special thickness other than standard. Specify in inches if required. (As shown above X = 0.050") |

## HIGH RELIABILITY TESTING

|      |                                 |
|------|---------------------------------|
| None | No voltage conditioning/burn-in |
| H    | Voltage conditioning/burn-in*   |

\*Option H is required for Testing Criteria HB, HV, HS, HK, and is optional for HH. For high temperature dielectrics, option H includes high temperature screening.

## VOLTAGE CODES

1st two digits are significant, third digit denotes number of zeros.  
For example:

|     |              |
|-----|--------------|
| 160 | 16 Volts     |
| 101 | 100 Volts    |
| 501 | 500 Volts    |
| 102 | 1,000 Volts  |
| 502 | 5,000 Volts  |
| 103 | 10,000 Volts |

## TERMINATION CODES

|    |                              |                   |
|----|------------------------------|-------------------|
| P  | Palladium Silver             |                   |
| PR | Palladium Silver*            |                   |
| K  | Solderable Palladium Silver* |                   |
| N  | Nickel Barrier*              | 100% tin          |
| Y  | Nickel Barrier               | 90% tin, 10% lead |
| NG | Nickel Barrier Gold Flash*   |                   |
| C  | FlexiCap™/Nickel Barrier*    | 100% tin          |
| D  | FlexiCap™/Nickel Barrier     | 90% tin, 10% lead |
| B  | Copper Barrier*              | 100% tin          |
| E  | Copper Barrier               | 90% tin, 10% lead |
| S  | Silver*                      |                   |

\*Indicates RoHS terminations

## CAPACITANCE TOLERANCE CODES

| Code | Tolerance      | COG/NP0 |   |         | R3L | X7R |       | BX | X8R | Class II | X5R |
|------|----------------|---------|---|---------|-----|-----|-------|----|-----|----------|-----|
|      | *Not RF series | N       | M | F/D, RD | K   | B   | C, RE | X  | S   | E/G      | W   |
| B    | ±0.10pF        | ●       | ● |         |     |     |       |    |     |          |     |
| C    | ±0.25pF        | ●       | ● |         | ●   |     |       |    |     |          |     |
| D    | ±0.50pF        | ●       | ● |         | ●   |     |       |    |     |          |     |
| F    | ±1%            | ●       | ● | ●       |     |     |       |    |     |          |     |
| G    | ±2%            | ●       | ● | ●       | ●   |     |       |    |     |          |     |
| J    | ±5%            | ●       | ● | ●       | ●   | ●*  | ●     | ●* | ●   | ●        |     |
| K    | ±10%           | ●       | ● | ●       | ●   | ●   | ●     | ●  | ●   | ●        | ●   |
| M    | ±20%           | ●       |   | ●       | ●   | ●   | ●     | ●  | ●   | ●        | ●   |

## MARKING

|      |  |
|------|--|
| None | Unmarked   |
| M    | Marked<br>*Marking not available on sizes ≤ 0603 |

Note: Refer to page 20.

## PACKAGING

|      |               |
|------|---------------|
| None | Bulk          |
| T    | Tape and Reel |
| W    | Waffle Pack   |

## HIGH RELIABILITY TESTING CRITERIA

|    |                       |
|----|-----------------------|
| HB | MIL-PRF-55681 Group A |
| HV | MIL-PRF-49467 Group A |
| HS | MIL-PRF-123 Group A   |
| HK | MIL-PRF-38534 Class K |
| HH | MIL-PRF-38534 Class H |



# Chip Ordering Information — Syfer Brand Parts

| 1210      | Y           | 100     | 0103                           | K                     | X          | T         | ---         |
|-----------|-------------|---------|--------------------------------|-----------------------|------------|-----------|-------------|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric | Packaging | Suffix Code |

### CASE CODE

|      |
|------|
| 0402 |
| 0603 |
| 0805 |
| 1206 |
| 1210 |
| 1808 |
| 1812 |
| 1825 |
| 2220 |
| 2225 |
| 3640 |
| 4040 |
| 5550 |
| 8060 |

### CAPACITANCE TOLERANCE CODES

| Code | Tolerance | Cap. Value < 4.7pF |
|------|-----------|--------------------|
| H    | ±0.05pF   | Cap. Value < 10pF  |
| H    | ±0.05pF   |                    |
| B    | ±0.10pF   |                    |
| C    | ±0.25pF   |                    |
| D    | ±0.50pF   |                    |
| F    | ±1%       | Cap. Value ≥ 10pF  |
| G    | ±2%       |                    |
| J    | ±5%       |                    |
| K    | ±10%      |                    |
| M    | ±20%      |                    |

### PACKAGING

| Code |                           |
|------|---------------------------|
| T    | 178mm (7") reel           |
| R    | 330mm (13") reel          |
| B    | Bulk pack — tubs or trays |

### SUFFIX DEFINITIONS

Used for specific customer requirements

|     |   |
|-----|---|
| PXX | Palladium electrodes                    |
| LS* | Chip marking<br>*(consult Sales Office) |

### TERMINATION CODES

|   |                                     |                  |
|---|-------------------------------------|------------------|
| A | Nickel barrier                      | 90%/10% tin/lead |
| F | Palladium Silver*                   |                  |
| H | FlexiCap™/Nickel Barrier            | 90%/10% tin/lead |
| J | Nickel Barrier*                     | 100% tin         |
| Y | FlexiCap™/Nickel Barrier*           | 100% tin         |
| 2 | Copper Barrier* (Non-Mag)           | 100% tin         |
| 3 | FlexiCap™/Copper Barrier* (Non-Mag) | 100% tin         |
| 4 | Copper Barrier (Non-Mag)            | 90%/10% tin/lead |
| 5 | FlexiCap™/Copper Barrier (Non-Mag)  | 90%/10% tin/lead |

\*Indicates RoHS terminations

### DIELECTRIC CODES

| Code | Dielectric        | Feature                    |
|------|-------------------|----------------------------|
| C    | COG/NPO (1B)      | Ultra Stable               |
| H    | X8G               | Ultra Stable/High Q        |
| P    | X5R               | Stable                     |
| X    | X7R (2R1)         | Stable                     |
| J    | X7R (2R1)(BME)    | Stable                     |
| N    | X8R               | Stable                     |
| Q    | COG/NPO (1B)      | Ultra Stable/High Q        |
| U    | COG/NPO (1B)      | Ultra Stable/Ultra-Low ESR |
| A    | COG/NPO (1B)      | AEC -Q200 Approved         |
| S    | X7R (2R1)(BME)    | AEC -Q200 Approved         |
| E    | X7R (2R1)         | AEC -Q200 Approved         |
| T    | X8R               | AEC -Q200 Approved         |
| K    | COG/NPO (1B)(BME) | AEC -Q200 Approved         |
| F    | COG/NPO (1B)      | IECQ-CECC Release          |
| D    | X7R (2R1)         | IECQ-CECC Release          |
| R    | BZ (2C1)          | IECQ-CECC Release          |
| B    | BX (2X1)          | IECQ-CECC Release          |
| G    | COG/NPO (1B)(BME) | Ultra Stable               |

### VOLTAGE CODES

| Code | Value  | Code | Value   | Code | Value  |
|------|--------|------|---------|------|--------|
| 010  | 10Vdc  | 1K0  | 1kVdc   | A25  | 250Vac |
| 016  | 16Vdc  | 1K2  | 1.2kVdc |      |        |
| 025  | 25Vdc  | 1K5  | 1.5kVdc |      |        |
| 050  | 50Vdc  | 2K0  | 2kVdc   |      |        |
| 063  | 63Vdc  | 2K5  | 2.5kVdc |      |        |
| 100  | 100Vdc | 3K0  | 3kVdc   |      |        |
| 200  | 200Vdc | 4K0  | 4kVdc   |      |        |
| 250  | 250Vdc | 5K0  | 5kVdc   |      |        |
| 500  | 500Vdc | 6K0  | 6kVdc   |      |        |
| 630  | 630Vdc | 8K0  | 8kVdc   |      |        |
|      |        | 10K  | 10kVdc  |      |        |
|      |        | 12K  | 12kVdc  |      |        |

### CAPACITANCE CODES

| Calculation   | Example | Capacitance value                |
|---|---------|----------------------------------|
| <1.0pF<br>Insert a P for the decimal point as the 1st character.  | P300    | 0.3pF<br>(values in 0.1pF steps) |
| ≥1.0pF & <10pF<br>Insert a P for the decimal point as the 2nd character.  | 8P20    | 8.2pF<br>(values are E24 series) |
| ≥10pF<br>1st digit is 0. 2nd and 3rd digits are significant figures of capacitance value. 4th digit is number of zeros. | 0101    | 100pF<br>(values are E24 series) |



# COG/NPO (1B) — AEC-Q200 and Standard Ranges

## COG/NPO (1B) — AEC-Q200 AND STANDARD RANGES — CAPACITANCE VALUES

|          | COG/NPO (1B)          | 0402        | 0603        | 0805        | 1206        | 1210        | 1808        |             |
|----------|-----------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|          | Maximum Thickness (T) | 0.6mm       | 0.8mm       | 1.3mm       | 1.7mm       | 2.0mm       | 2.2mm       |             |
| 10V      | Standard              | -           | 0.5pF-3.9nF | 1.0pF-15nF  | 1.0pF-47nF  | 3.9pF-100nF | -           | 4.7pF-100nF |
| 16V      | AEC-Q200              | -           | 0.5pF-1.0nF | 1.0pF-4.7nF | 1.0pF-15nF  | 3.9pF-27nF  | -           | 4.7pF-27nF  |
|          | Standard              | -           | 0.5pF-2.7nF | 1.0pF-12nF  | 1.0pF-33nF  | 3.9pF-68nF  | -           | 4.7pF-68nF  |
| 25V      | AEC-Q200              | -           | 0.5pF-1.0nF | 1.0pF-4.7nF | 1.0pF-15nF  | 3.9pF-27nF  | -           | 4.7pF-27nF  |
|          | Standard              | 0.2pF-220pF | 0.5pF-2.2nF | 1.0pF-10nF  | 1.0pF-27nF  | 3.9pF-56nF  | -           | 4.7pF-47nF  |
| 50V/63V  | AEC-Q200              | -           | 0.5pF-1.0nF | 1.0pF-4.7nF | 1.0pF-15nF  | 3.9pF-27nF  | -           | 4.7pF-27nF  |
|          | Standard              | 0.2pF-220pF | 0.5pF-1.5nF | 1.0pF-5.6nF | 1.0pF-22nF  | 3.9pF-33nF  | -           | 4.7pF-33nF  |
| 100V     | AEC-Q200              | -           | 0.5pF-680pF | 1.0pF-2.2nF | 1.0pF-8.2nF | 3.9pF-15nF  | -           | 4.7pF-15nF  |
|          | Standard              | 0.2pF-100pF | 0.5pF-680pF | 1.0pF-2.2nF | 1.0pF-8.2nF | 3.9pF-18nF  | -           | 4.7pF-18nF  |
| 200/250V | AEC-Q200              | -           | 0.5pF-560pF | 1.0pF-1.5nF | 1.0pF-3.9nF | 3.9pF-8.2nF | -           | 4.7pF-8.2nF |
|          | Standard              | 0.2pF-33pF  | 0.5pF-560pF | 1.0pF-1.5nF | 1.0pF-3.9nF | 3.9pF-8.2nF | -           | 4.7pF-8.2nF |
| 500V     | AEC-Q200              | -           | 10pF-330pF  | 1.0pF-1.0nF | 1.0pF-3.3nF | 3.9pF-6.8nF | -           | 4.7pF-6.8nF |
|          | Standard              | -           | 0.5pF-330pF | 1.0pF-1.5nF | 1.0pF-3.3nF | 3.9pF-6.8nF | -           | 4.7pF-6.8nF |
| 630V     | AEC-Q200              | -           | -           | 10pF-820pF  | 1.0pF-2.7nF | 3.9pF-5.6nF | 6.8nF-6.8nF | 4.7pF-6.8nF |
|          | Standard              | -           | -           | 1.0pF-820pF | 1.0pF-2.7nF | 3.9pF-5.6nF | 6.8nF-6.8nF | 4.7pF-6.8nF |
| 1kV      | AEC-Q200              | -           | -           | 10pF-330pF  | 1.0pF-2.2nF | 3.9pF-3.9nF | -           | 4.7pF-3.9nF |
|          | Standard              | -           | -           | 1.0pF-330pF | 1.0pF-2.2nF | 3.9pF-3.9nF | -           | 4.7pF-3.9nF |
| 1.2kV    | AEC-Q200              | -           | -           | 10pF-180pF  | 1.0pF-820pF | 3.9pF-1.8nF | -           | 4.7pF-2.2nF |
|          | Standard              | -           | -           | 1.0pF-180pF | 1.0pF-820pF | 3.9pF-1.8nF | -           | 4.7pF-2.2nF |
| 1.5kV    | AEC-Q200              | -           | -           | 10pF-150pF  | 1.0pF-560pF | 3.9pF-1.2nF | -           | 4.7pF-1.5nF |
|          | Standard              | -           | -           | 1.0pF-150pF | 1.0pF-560pF | 3.9pF-1.2nF | -           | 4.7pF-1.5nF |
| 2kV      | AEC-Q200              | -           | -           | 10pF-100pF  | 1.0pF-390pF | 3.9pF-560pF | -           | 4.7pF-680pF |
|          | Standard              | -           | -           | 1.0pF-100pF | 1.0pF-390pF | 3.9pF-560pF | -           | 4.7pF-680pF |
| 2.5kV    | AEC-Q200              | -           | -           | -           | 10pF-150pF  | 10pF-330pF  | -           | 10pF-390pF  |
|          | Standard              | -           | -           | -           | 1.0pF-150pF | 3.9pF-330pF | -           | 4.7pF-390pF |
| 3kV      | AEC-Q200              | -           | -           | -           | 10pF-100pF  | 10pF-220pF  | -           | 10pF-270pF  |
|          | Standard              | -           | -           | -           | 1.0pF-100pF | 3.9pF-220pF | -           | 4.7pF-270pF |
| 4kV*     | AEC-Q200              | -           | -           | -           | -           | -           | -           | 10pF-150pF  |
|          | Standard              | -           | -           | -           | -           | -           | -           | 4.7pF-150pF |
| 5kV*     | AEC-Q200              | -           | -           | -           | -           | -           | -           | 10pF-82pF   |
|          | Standard              | -           | -           | -           | -           | -           | -           | 4.7pF-82pF  |
| 6kV*     | Standard              | -           | -           | -           | -           | -           | -           | 4.7pF-47pF  |
| 8kV*     | Standard              | -           | -           | -           | -           | -           | -           | -           |
| 10kV*    | Standard              | -           | -           | -           | -           | -           | -           | -           |
| 12kV*    | Standard              | -           | -           | -           | -           | -           | -           | -           |

Notes:

- 1) \*Parts rated 4kV and above may require conformal coating post soldering.
- 2) Standard parts are normally ordered using the Syfer order code system (see page 26), but are also available as Novacap parts using dielectric code RN (page 25). Note the RN nomenclature is being phased out and is not recommended for new designs, rather the Syfer brand part number should be used.



# COG/NPO (1B) — AEC-Q200 and Standard Ranges

CONTINUED

10V TO 12KV

| COG/NPO (1B) |                       | 1812       |             | 1825         |              | 2220       |             |
|--------------|-----------------------|------------|-------------|--------------|--------------|------------|-------------|
|              | Maximum Thickness (T) | 2.5mm      | 3.2mm       | 2.5mm        | 4.0mm        | 2.5mm      | 4.0mm       |
| 10V          | Standard              | 10pF-220nF | -           | 10pF - 470nF | -            | 10pF-470nF | -           |
| 16V          | AEC-Q200              | 10pF-47nF  | -           | 10pF-82nF    | -            | 10pF-100nF | -           |
|              | Standard              | 10pF-180nF | -           | 10pF-330nF   | -            | 10pF-330nF | -           |
| 25V          | AEC-Q200              | 10pF-47nF  | -           | 10pF-82nF    | -            | 10pF-100nF | -           |
|              | Standard              | 10pF-150nF | -           | 10pF-220nF   | -            | 10pF-220nF | -           |
| 50V/63V      | AEC-Q200              | 10pF-47nF  | -           | 10pF-82nF    | -            | 10pF-100nF | -           |
|              | Standard              | 10pF-100nF | -           | 10pF-150nF   | -            | 10pF-150nF | -           |
| 100V         | AEC-Q200              | 10pF-39nF  | -           | 10pF-47nF    | -            | 10pF-56nF  | -           |
|              | Standard              | 10pF-47nF  | -           | 10pF-68nF    | -            | 10pF-68nF  | -           |
| 200V/250V    | AEC-Q200              | 10pF-18nF  | 22nF-22nF   | 10pF-27nF    | 33nF-33nF    | 10pF-33nF  | 39nF-39nF   |
|              | Standard              | 10pF-22nF  | 27nF-27nF   | 10pF-33nF    | 39nF-47nF    | 10pF-33nF  | 39nF-56nF   |
| 500V         | AEC-Q200              | 10pF-15nF  | 18nF-22nF   | 10pF-18nF    | 22nF-33nF    | 10pF-27nF  | 33nF-39nF   |
|              | Standard              | 10pF-15nF  | 18nF-22nF   | 10pF-27nF    | 33nF-33nF    | 10pF-27nF  | 33nF-39nF   |
| 630V         | AEC-Q200              | 10pF-15nF  | 18nF-22nF   | 10pF-10nF    | 12nF-33nF    | 10pF-27nF  | 33nF-39nF   |
|              | Standard              | 10pF-15nF  | 18nF-22nF   | 10pF-22nF    | 27nF-33nF    | 10pF-27nF  | 33nF-39nF   |
| 1kV          | AEC-Q200              | 10pF-6.8nF | 8.2nF-10nF  | 10pF-10nF    | 12nF-22nF    | 10pF-15nF  | 18nF-22nF   |
|              | Standard              | 10pF-6.8nF | 8.2nF-10nF  | 10pF-12nF    | 15nF-22nF    | 10pF-15nF  | 18nF-22nF   |
| 1.2kV        | AEC-Q200              | 10pF-3.9nF | 4.7nF-8.2nF | 10pF-5.6nF   | 6.8nF-18nF   | 10pF-5.6nF | 6.8nF-22nF  |
|              | Standard              | 10pF-4.7nF | 5.6nF-8.2nF | 10pF-6.8nF   | 8.2nF-18nF   | 10pF-10nF  | 12nF-22nF   |
| 1.5kV        | AEC-Q200              | 10pF-3.9nF | 4.7nF-6.8nF | 10pF-5.6nF   | 6.8nF-12nF   | 10pF-5.6nF | 6.8nF-15nF  |
|              | Standard              | 10pF-3.9nF | 4.7nF-6.8nF | 10pF-5.6nF   | 6.8nF-12nF   | 10pF-5.6nF | 6.8nF-15nF  |
| 2kV          | AEC-Q200              | 10pF-2.2nF | 2.7nF-2.7nF | 10pF-4.7nF   | 5.6nF-5.6nF  | 10pF-4.7nF | 5.6nF-5.6nF |
|              | Standard              | 10pF-2.2nF | 2.7nF-2.7nF | 10pF-4.7nF   | 5.6nF-5.6nF  | 10pF-4.7nF | 5.6nF-5.6nF |
| 2.5kV        | AEC-Q200              | 10pF-680pF | 820pF-1.5nF | 10pF-1.2nF   | 1.5nF-3.3nF  | 10pF-1.5nF | 1.8nF-3.9nF |
|              | Standard              | 10pF-820pF | 1.0nF-1.5nF | 10pF-1.5nF   | 1.8nF-3.3nF  | 10pF-1.8nF | 2.2nF-3.9nF |
| 3kV          | AEC-Q200              | 10pF-470pF | 560pF-1.0nF | 10pF-820pF   | 1.0nF-2.2nF  | 10pF-1.0nF | 1.2nF-2.7nF |
|              | Standard              | 10pF-560pF | 680pF-1.0nF | 10pF- 1.2nF  | 1.5nF-2.2nF  | 10pF-1.5nF | 1.8nF-2.7nF |
| 4kV*         | AEC-Q200              | 10pF-220pF | 270pF-560pF | 10pF-680pF   | 820pF-1.5nF  | 10pF-680pF | 820pF-1.8nF |
|              | Standard              | 10pF-270pF | 330pF-560pF | 10pF-680pF   | 820pF-1.5nF  | 10pF-680pF | 820pF-1.8nF |
| 5kV*         | AEC-Q200              | 10pF-180pF | 220pF-220pF | 10pF-330pF   | 390pF- 560pF | 10pF-330pF | 390pF-680pF |
|              | Standard              | 10p-180pF  | 220pF-270pF | 10pF-390pF   | 470pF- 560pF | 10pF-470pF | 560pF-820pF |
| 6kV*         | Standard              | 10pF-120pF | 150pF-180pF | 10pF-270pF   | 330pF- 330pF | 10pF-330pF | 390p-560pF  |
| 8kV*         | Standard              | -          | -           | -            | -            | -          | -           |
| 10kV*        | Standard              | -          | -           | -            | -            | -          | -           |
| 12kV*        | Standard              | -          | -           | -            | -            | -          | -           |

Notes:

- 1) \*Parts rated 4kV and above may require conformal coating post soldering.
- 2) Standard parts are normally ordered using the Syfer order code system (see page 26), but are also available as Novacap parts using dielectric code RN (page 25). Note the RN nomenclature is being phased out and is not recommended for new designs, rather the Syfer brand part number should be used.



# COG/NPO (1B) – AEC-Q200 and Standard Ranges

10V TO 12KV

| COG/NPO (1B)  |                       | 2225         |               | 3640          |               | 5550         |               | 8060         |               |
|---------------|-----------------------|--------------|---------------|---------------|---------------|--------------|---------------|--------------|---------------|
|               | Maximum Thickness (T) | 2.5mm        | 4.0mm         | 2.5mm         | 4.0mm         | 2.5mm        | 4.0mm         | 2.5mm        | 4.0mm         |
| 10V           | Standard              | 10pF - 560nF | -             | 10pF - 330nF  | -             | -            | -             | -            | -             |
| 16V           | AEC-Q200              | 10pF - 150nF | -             | 10pF - 220nF  | -             | -            | -             | -            | -             |
|               | Standard              | 10pF - 470nF | -             | 10pF - 330nF  | -             | -            | -             | -            | -             |
| 25V           | AEC-Q200              | 10pF - 150nF | -             | 10pF - 220nF  | -             | -            | -             | -            | -             |
|               | Standard              | 10pF - 330nF | -             | 10pF - 330nF  | -             | -            | -             | -            | -             |
| 50V/<br>63V   | AEC-Q200              | 10pF - 150nF | -             | 10pF - 220nF  | -             | -            | -             | -            | -             |
|               | Standard              | 10pF - 220nF | -             | 10pF - 330nF  | -             | 27pF - 680nF | -             | 47pF - 1.0μF | -             |
| 100V          | AEC-Q200              | 10pF - 68nF  | -             | 10pF - 180nF  | -             | -            | -             | -            | -             |
|               | Standard              | 10pF - 82nF  | -             | 10pF - 270nF  | -             | 27pF - 470nF | -             | 47pF - 680nF | -             |
| 200V/<br>250V | AEC-Q200              | 10pF - 33nF  | 39nF - 47nF   | 10pF - 82nF   | 100nF - 100nF | -            | -             | -            | -             |
|               | Standard              | 10pF - 47nF  | 56nF - 68nF   | 10pF - 120nF  | 150nF - 180nF | 27pF - 270nF | 330nF - 330nF | 47pF - 390nF | 470nF - 560nF |
| 500V          | AEC-Q200              | 10pF - 33nF  | 39nF - 47nF   | 10pF - 82nF   | 100nF - 100nF | -            | -             | -            | -             |
|               | Standard              | 10pF - 33nF  | 39nF - 47nF   | 10pF - 82nF   | 100nF - 120nF | 27pF - 180nF | 220nF - 270nF | 47pF - 270nF | 330nF - 470nF |
| 630V          | AEC-Q200              | 10pF - 18nF  | -             | 10pF - 82nF   | 100nF - 100nF | -            | -             | -            | -             |
|               | Standard              | 10pF - 22nF  | 27nF - 39nF   | 10pF - 82nF   | 100nF - 100nF | 27pF - 120nF | 150nF - 180nF | 47pF - 220nF | 270nF - 390nF |
| 1kV           | AEC-Q200              | 10pF - 18nF  | 22nF - 27nF   | 10pF - 47nF   | 56nF - 68nF   | -            | -             | -            | -             |
|               | Standard              | 10pF - 18nF  | 22nF - 27nF   | 10pF - 47nF   | 56nF - 82nF   | 27pF - 82nF  | 100nF - 150nF | 47pF - 150nF | 180nF - 270nF |
| 1.2kV         | AEC-Q200              | 10pF - 6.8nF | 8.2nF - 27nF  | 10pF - 33nF   | 39nF - 56nF   | -            | -             | -            | -             |
|               | Standard              | 10pF - 12nF  | 15nF - 27nF   | 10pF - 33nF   | 39nF - 56nF   | 27pF - 68nF  | 82nF - 100nF  | 47pF - 100nF | 120nF - 180nF |
| 1.5kV         | AEC-Q200              | 10pF - 6.8nF | 8.2nF - 18nF  | 10pF - 22nF   | 27nF - 39nF   | -            | -             | -            | -             |
|               | Standard              | 10pF - 6.8nF | 8.2nF - 18nF  | 10pF - 22nF   | 27nF - 39nF   | 27pF - 39nF  | 47nF - 68nF   | 47pF - 68nF  | 82nF - 120nF  |
| 2kV           | AEC-Q200              | 10pF - 3.9nF | 4.7nF - 8.2nF | 10pF - 12nF   | 15nF - 15nF   | -            | -             | -            | -             |
|               | Standard              | 10pF - 4.7nF | 5.6nF - 8.2nF | 10pF - 12nF   | 15nF - 18nF   | 27pF - 22nF  | 27nF - 39nF   | 47pF - 39nF  | 47nF - 68nF   |
| 2.5kV         | AEC-Q200              | 10pF - 2.7nF | 3.3nF - 4.7nF | 100pF - 5.6nF | 6.8nF - 8.2nF | -            | -             | -            | -             |
|               | Standard              | 10pF - 2.7nF | 3.3nF - 4.7nF | 10pF - 6.8nF  | 8.2nF - 12nF  | 27pF - 12nF  | 15nF - 22nF   | 47pF - 22nF  | 27nF - 39nF   |
| 3kV           | AEC-Q200              | 10pF - 1.5nF | 1.8nF - 3.9nF | 100pF - 3.9nF | 4.7nF - 6.8nF | -            | -             | -            | -             |
|               | Standard              | 10pF - 1.8nF | 2.2nF - 3.9nF | 10pF - 4.7nF  | 5.6nF - 8.2nF | 27pF - 10nF  | 12nF - 18nF   | 47pF - 15nF  | 18nF - 27nF   |
| 4kV*          | AEC-Q200              | 10pF - 1.0nF | 1.2nF - 1.8nF | -             | -             | -            | -             | -            | -             |
|               | Standard              | 10pF - 1.0nF | 1.2nF - 1.8nF | 10pF - 1.8nF  | 2.2nF - 3.3nF | 27pF - 4.7nF | 5.6nF - 6.8nF | 47pF - 8.2nF | 10nF - 15nF   |
| 5kV*          | AEC-Q200              | 10pF - 680pF | 820pF - 820pF | -             | -             | -            | -             | -            | -             |
|               | Standard              | 10pF - 680pF | 820pF - 1.2nF | 10pF - 1.5nF  | 1.8nF - 2.2nF | 27pF - 2.7nF | 3.3nF - 4.7nF | 47pF - 5.6nF | 6.8nF - 10nF  |
| 6kV*          | Standard              | 10pF - 390pF | 470pF - 680pF | 10pF - 1.0nF  | 1.2nF - 1.5nF | 27pF - 1.8nF | 2.2nF - 3.3nF | 47pF - 3.9nF | 4.7nF - 6.8nF |
| 8kV*          | Standard              | -            | -             | 10pF - 150pF  | -             | 27pF - 330pF | -             | 47pF - 680pF | -             |
| 10kV*         | Standard              | -            | -             | 10pF - 100pF  | -             | 27pF - 180pF | -             | 47pF - 470pF | -             |
| 12kV*         | Standard              | -            | -             | 10pF - 68pF   | -             | 27pF - 120pF | -             | 47pF - 220pF | -             |

Notes:  
 1) \*Parts rated 4kV and above may require conformal coating post soldering.  
 2) Standard parts are normally ordered using the Syfer order code system (see page 26), but are also available as Novacap parts using dielectric code RN (page 25). Note the RN nomenclature is being phased out and is not recommended for new designs, rather the Syfer brand part number should be used.



# X7R (2R1) — AEC-Q200 and Standard Ranges

## X7R (2R1) — AEC-Q200 AND STANDARD RANGES — CAPACITANCE VALUES

16V TO 12KV

|        | X7R(2R1)              | 0402         | 0603          | 0805          | 1206          | 1206              | 1210          | 1210              | 1210        | 1210              | 1808          | 1808              |
|--------|-----------------------|--------------|---------------|---------------|---------------|-------------------|---------------|-------------------|-------------|-------------------|---------------|-------------------|
|        | Maximum Thickness (T) | 0.6mm        | 0.9mm         | 1.3mm         | 1.7mm         | 1.7mm             | 2.0mm         | 2.0mm             | 2.8mm       | 2.8mm             | 2.0mm         | 2.0mm             |
|        | Special Requirements  | -            | -             | -             | -             | Conformal Coating | -             | Conformal Coating | -           | Conformal Coating | -             | Conformal Coating |
| 16V    | AEC-Q200              | -            | -             | 220pF - 100nF | 220pF - 470nF | -                 | 1.0nF - 1.0µF | -                 | -           | -                 | 1.0nF - 470nF | -                 |
|        | Standard              | -            | 100pF - 100nF | 100pF - 330nF | 100pF - 1.0µF | -                 | 100pF - 1.5µF | -                 | -           | -                 | 100pF - 1.5µF | -                 |
| 25V    | AEC-Q200              | -            | -             | 220pF - 100nF | 220pF - 470nF | -                 | 1.0nF - 1.0µF | -                 | -           | -                 | 1.0nF - 470nF | -                 |
|        | Standard              | 47pF - 10nF  | 100pF - 100nF | 100pF - 220nF | 100pF - 820nF | -                 | 100pF - 1.2µF | -                 | -           | -                 | 100pF - 1.2µF | -                 |
| 50/63V | AEC-Q200              | -            | 100pF - 100nF | 100pF - 220nF | 100pF - 470nF | -                 | 100pF - 1.0µF | -                 | -           | -                 | 100pF - 680nF | -                 |
|        | Standard              | 47pF - 5.6nF | 100pF - 100nF | 100pF - 220nF | 100pF - 470nF | -                 | 100pF - 1.0µF | -                 | -           | -                 | 100pF - 680nF | -                 |
| 100V   | AEC-Q200              | -            | 100pF - 47nF  | 100pF - 100nF | 100pF - 220nF | -                 | 100pF - 680nF | -                 | -           | -                 | 100pF - 560nF | -                 |
|        | Standard              | 47pF - 3.3nF | 100pF - 47nF  | 100pF - 100nF | 100pF - 330nF | -                 | 100pF - 680nF | -                 | -           | -                 | 100pF - 560nF | -                 |
| 200    | AEC-Q200              | -            | 100pF - 10nF  | 100pF - 47nF  | 100pF - 150nF | -                 | 100pF - 330nF | -                 | -           | -                 | 100pF - 330nF | -                 |
|        | Standard              | 47pF - 1.0nF | 100pF - 10nF  | 100pF - 56nF  | 100pF - 150nF | -                 | 100pF - 330nF | -                 | -           | -                 | 100pF - 330nF | -                 |
| 250V   | AEC-Q200              | -            | 100pF - 10nF  | 100pF - 47nF  | 100pF - 150nF | -                 | 100pF - 330nF | -                 | -           | -                 | 100pF - 270nF | -                 |
|        | Standard              | 47pF - 1.0nF | 100pF - 10nF  | 100pF - 56nF  | 100pF - 150nF | -                 | 100pF - 330nF | -                 | -           | -                 | 100pF - 270nF | -                 |
| 500V   | AEC-Q200              | -            | 220pF - 2.2nF | 100pF - 15nF  | 100pF - 68nF  | -                 | 100pF - 150nF | -                 | -           | -                 | 100pF - 150nF | -                 |
|        | Standard              | -            | 100pF - 2.2nF | 100pF - 15nF  | 100pF - 68nF  | -                 | 100pF - 150nF | -                 | -           | -                 | 100pF - 150nF | -                 |
| 630V   | AEC-Q200              | -            | -             | 220pF - 10nF  | 100pF - 47nF  | -                 | 100pF - 100nF | -                 | -           | -                 | 100pF - 100nF | -                 |
|        | Standard              | -            | -             | 100pF - 10nF  | 100pF - 47nF  | -                 | 100pF - 100nF | -                 | -           | -                 | 100pF - 100nF | -                 |
| 1kV    | AEC-Q200              | -            | -             | 220pF - 4.7nF | 100pF - 22nF  | -                 | 100pF - 47nF  | -                 | -           | -                 | 100pF - 47nF  | -                 |
|        | Standard              | -            | -             | 100pF - 10nF  | 100pF - 22nF  | -                 | 100pF - 47nF  | -                 | -           | -                 | 100pF - 47nF  | -                 |
| 1.2kV  | AEC-Q200              | -            | -             | -             | 100pF - 10nF  | -                 | 100pF - 22nF  | -                 | -           | -                 | 100pF - 18nF  | -                 |
|        | Standard              | -            | -             | -             | 100pF - 15nF  | -                 | 100pF - 22nF  | -                 | -           | -                 | 100pF - 22nF  | -                 |
| 1.5kV  | AEC-Q200              | -            | -             | -             | 100pF - 10nF  | -                 | 100pF - 18nF  | -                 | 22nF - 22nF | -                 | 100pF - 18nF  | -                 |
|        | Standard              | -            | -             | -             | 100pF - 10nF  | -                 | 100pF - 18nF  | -                 | 22nF - 22nF | -                 | 100pF - 18nF  | -                 |
| 2kV    | AEC-Q200              | -            | -             | -             | 100pF - 2.2nF | 2.7nF - 3.3nF     | 100pF - 4.7nF | 5.6nF - 5.6nF     | -           | 6.8nF - 10nF      | 100pF - 4.7nF | 5.6nF - 8.2nF     |
|        | Standard              | -            | -             | -             | 100pF - 2.2nF | 2.7nF - 3.3nF     | 100pF - 4.7nF | 5.6nF - 5.6nF     | -           | 6.8nF - 10nF      | 100pF - 4.7nF | 5.6nF - 8.2nF     |
| 2.5kV  | AEC-Q200              | -            | -             | -             | -             | 100pF - 2.2nF     | -             | 100pF - 4.7nF     | -           | -                 | 1.0nF - 1.5nF | 1.8nF - 4.7nF     |
|        | Standard              | -            | -             | -             | -             | 220pF - 2.7nF     | -             | 680pF - 4.7nF     | -           | -                 | 100pF - 1.5nF | 1.8nF - 4.7nF     |
| 3kV    | AEC-Q200              | -            | -             | -             | -             | 100pF - 1.5nF     | -             | 100pF - 3.3nF     | -           | -                 | 1.0nF - 1.2nF | 1.5nF - 3.9nF     |
|        | Standard              | -            | -             | -             | -             | 220pF - 1.5nF     | -             | 680pF - 3.3nF     | -           | -                 | 100pF - 1.2nF | 1.5nF - 3.9nF     |
| 4kV*   | AEC-Q200              | -            | -             | -             | -             | -                 | -             | -                 | -           | -                 | 1.0nF - 1.0nF | 1.2nF - 1.5nF     |
|        | Standard              | -            | -             | -             | -             | -                 | -             | -                 | -           | -                 | 100pF - 1.0nF | 1.2nF - 2.2nF     |
| 5kV*   | Standard              | -            | -             | -             | -             | -                 | -             | -                 | -           | -                 | 100pF - 680pF | -                 |
| 6kV*   | Standard              | -            | -             | -             | -             | -                 | -             | -                 | -           | -                 | 100pF - 390pF | -                 |
| 8kV*   | Standard              | -            | -             | -             | -             | -                 | -             | -                 | -           | -                 | -             | -                 |
| 10kV*  | Standard              | -            | -             | -             | -             | -                 | -             | -                 | -           | -                 | -             | -                 |
| 12kV*  | Standard              | -            | -             | -             | -             | -                 | -             | -                 | -           | -                 | -             | -                 |

**Notes:**

- 1) \*Parts rated 4kV and higher may require conformal coating post soldering.
- 2) "Conformal Coating" identifies parts that must be conformally coated after mounting to prevent flashover, especially between the board and the component.
- 3) Suffix codes WS2 and WS3 relate to StackiCap™ high capacitance parts. WS3 parts (shown in parentheses) must be conformally coated after mounting, especially between the board and the component.

- 4) Parts in this range may be dual use under export control legislation and as such may be subject to export license restrictions. Please refer to page 15 for more information on the dual-use regulations and contact the Knowles Precision Devices sales office for further information on specific part numbers.
- 5) Standard parts are normally ordered using the Syfer order code system (see page 26), but are also available as Novacap parts using dielectric code RB (see page 25). Note the RB nomenclature is being phased out and is not recommended for new designs, rather the Syfer brand part number should be used.



# X7R (2R1) — AEC-Q200 and Standard Ranges

16V TO 12KV

| X7R(2R1)              |          | 1812              |               |                       |                | 1825              |              |               | 2220              |               |                       |  |
|-----------------------|----------|-------------------|---------------|-----------------------|----------------|-------------------|--------------|---------------|-------------------|---------------|-----------------------|--|
| Maximum Thickness (T) | 2.5mm    | 2.5mm             | 3.2mm         | 3.5mm                 | 2.5mm          | 2.5mm             | 4.0mm        | 2.5mm         | 2.5mm             | 4.0mm         | 4.5mm                 |  |
| Special Requirements  | -        | Conformal Coating | -             | Suffix Code WS2 (WS3) | -              | Conformal Coating | -            | -             | Conformal Coating | -             | Suffix Code WS2 (WS3) |  |
| 16V                   | AEC-Q200 | 1.0nF - 680nF     | -             | -                     | -              | 1.0nF - 680nF     | -            | -             | 1.0nF - 1.5µF     | -             | -                     |  |
|                       | Standard | 150pF - 3.3µF     | -             | -                     | -              | 220pF - 4.7µF     | -            | -             | 220pF - 5.6µF     | -             | -                     |  |
| 25V                   | AEC-Q200 | 1.0nF - 680nF     | -             | -                     | -              | 1.0nF - 680nF     | -            | -             | 1.0nF - 1.5µF     | -             | -                     |  |
|                       | Standard | 150pF - 2.2µF     | -             | -                     | -              | 220pF - 3.9µF     | -            | -             | 220pF - 4.7µF     | -             | -                     |  |
| 50/<br>63V            | AEC-Q200 | 150pF - 2.2µF     | -             | -                     | -              | 220pF - 2.2µF     | -            | -             | 220pF - 3.3µF     | -             | -                     |  |
|                       | Standard | 150pF - 2.2µF     | -             | -                     | -              | 220pF - 2.2µF     | -            | -             | 220pF - 3.3µF     | -             | -                     |  |
| 100V                  | AEC-Q200 | 150pF - 1.0µF     | -             | -                     | -              | 220pF - 1.5µF     | -            | -             | 220pF - 1.5µF     | -             | -                     |  |
|                       | Standard | 150pF - 1.5µF     | -             | -                     | -              | 220pF - 1.5µF     | -            | -             | 220pF - 2.2µF     | -             | -                     |  |
| 200                   | AEC-Q200 | 150pF - 560nF     | -             | 680nF - 680nF         | 820nF - 1.0µF  | 220pF - 1.2µF     | -            | 1.5µF - 1.5µF | 220pF - 1.2µF     | -             | 1.5µF - 1.5µF         |  |
|                       | Standard | 150pF - 560nF     | -             | 680nF - 680nF         | 820nF - 1.0µF  | 220pF - 1.2µF     | -            | 1.5µF - 1.5µF | 220pF - 1.2µF     | -             | 1.5µF - 1.5µF         |  |
| 250V                  | AEC-Q200 | 150pF - 560nF     | -             | 680nF - 680nF         | 820nF - 1.0µF  | 220pF - 1.2µF     | -            | 1.5µF - 1.5µF | 220pF - 1.2µF     | -             | 1.5µF - 1.5µF         |  |
|                       | Standard | 150pF - 560nF     | -             | 680nF - 680nF         | 820nF - 1.0µF  | 220pF - 1.2µF     | -            | 1.5µF - 1.5µF | 220pF - 1.2µF     | -             | 1.5µF - 1.5µF         |  |
| 500V                  | AEC-Q200 | 150pF - 390nF     | -             | 470nF - 470nF         | 470nF - 470nF  | 220pF - 560nF     | -            | -             | 220pF - 680nF     | -             | -                     |  |
|                       | Standard | 150pF - 390nF     | -             | 470nF - 470nF         | 470nF - 470nF  | 220pF - 560nF     | -            | -             | 220pF - 680nF     | -             | 820nF - 1.2µF         |  |
| 630V                  | AEC-Q200 | 150pF - 220nF     | -             | -                     | 220nF - 330nF  | 220pF - 470nF     | -            | -             | 220pF - 470nF     | -             | 560nF - 1.0µF         |  |
|                       | Standard | 150pF - 220nF     | -             | -                     | 270nF - 330nF  | 220pF - 470nF     | -            | -             | 220pF - 470nF     | -             | 560nF - 1.0µF         |  |
| 1kV                   | AEC-Q200 | 150pF - 100nF     | -             | -                     | 120nF - 180nF  | 220pF - 180nF     | -            | -             | 220pF - 180nF     | -             | 220nF - 470nF         |  |
|                       | Standard | 150pF - 100nF     | -             | -                     | 120nF - 180nF  | 220pF - 180nF     | -            | -             | 220pF - 180nF     | -             | 220nF - 470nF         |  |
| 1.2kV                 | AEC-Q200 | 150pF - 39nF      | -             | -                     | (47nF - 100nF) | 220pF - 68nF      | -            | -             | 220pF - 82nF      | -             | (100nF - 220nF)       |  |
|                       | Standard | 150pF - 39nF      | -             | -                     | (47nF - 100nF) | 220pF - 68nF      | -            | -             | 220pF - 82nF      | -             | (100nF - 220nF)       |  |
| 1.5kV                 | AEC-Q200 | 150pF - 39nF      | -             | -                     | (47nF - 56nF)  | 220pF - 68nF      | -            | -             | 220pF - 82nF      | -             | (100nF - 150nF)       |  |
|                       | Standard | 150pF - 39nF      | -             | -                     | (47nF - 56nF)  | 220pF - 68nF      | -            | -             | 220pF - 82nF      | -             | (100nF - 150nF)       |  |
| 2kV                   | AEC-Q200 | 150pF - 10nF      | 12nF - 18nF   | -                     | -              | 220pF - 10nF      | 12nF - 22nF  | -             | 220pF - 27nF      | -             | (33nF - 100nF)        |  |
|                       | Standard | 150pF - 10nF      | 12nF - 18nF   | -                     | -              | 220pF - 10nF      | 12nF - 22nF  | -             | 220pF - 33nF      | -             | (39nF - 100nF)        |  |
| 2.5kV                 | AEC-Q200 | 150pF - 3.3nF     | 3.9nF - 10nF  | -                     | -              | 220pF - 6.8nF     | 8.2nF - 18nF | -             | 220pF - 8.2nF     | 10nF - 22nF   | -                     |  |
|                       | Standard | 150pF - 3.3nF     | 3.9nF - 10nF  | -                     | -              | 220pF - 6.8nF     | 8.2nF - 18nF | -             | 220pF - 8.2nF     | 10nF - 22nF   | -                     |  |
| 3kV                   | AEC-Q200 | 150pF - 2.7nF     | 3.3nF - 4.7nF | -                     | -              | 220pF - 3.9nF     | 4.7nF - 10nF | -             | 220pF - 6.8nF     | 8.2nF - 15nF  | -                     |  |
|                       | Standard | 150pF - 2.7nF     | 3.3nF - 4.7nF | -                     | -              | 220pF - 3.9nF     | 4.7nF - 10nF | -             | 220pF - 6.8nF     | 8.2nF - 15nF  | -                     |  |
| 4kV*                  | AEC-Q200 | 150pF - 2.2nF     | -             | -                     | -              | 1.0nF - 2.2nF     | -            | -             | 220pF - 4.7nF     | 5.6nF - 6.8nF | -                     |  |
|                       | Standard | 150pF - 2.2nF     | 2.7nF - 3.3nF | -                     | -              | 220pF - 2.2nF     | -            | -             | 220pF - 4.7nF     | 5.6nF - 6.8nF | -                     |  |
| 5kV*                  | Standard | 150pF - 1.2nF     | -             | -                     | -              | 220pF - 1.8nF     | -            | -             | 220pF - 3.9nF     | 4.7nF - 4.7nF | -                     |  |
| 6kV*                  | Standard | 150pF - 1.0nF     | -             | -                     | -              | 220pF - 1.5nF     | -            | -             | 220pF - 2.2nF     | -             | -                     |  |
| 8kV*                  | Standard | -                 | -             | -                     | -              | -                 | -            | -             | -                 | -             | -                     |  |
| 10kV*                 | Standard | -                 | -             | -                     | -              | -                 | -            | -             | -                 | -             | -                     |  |
| 12kV*                 | Standard | -                 | -             | -                     | -              | -                 | -            | -             | -                 | -             | -                     |  |

**Notes:**

- 1) \*Parts rated 4kV and above may require conformal coating post soldering.
- 2) \*Conformal Coating" identifies parts that must be conformally coated after mounting to prevent flashover, especially between the board and the component.
- 3) Suffix codes WS2 and WS3 relate to StackiCap™ high capacitance parts. WS3 parts (shown in parentheses) must be conformally coated after mounting, especially between the board and the component.
- 4) Parts in this range may be dual use under export control legislation and as such may be subject to export license restrictions. Please refer to page 15 for more information on the dual-use regulations and contact the Knowles Precision Devices sales office for further information on specific part numbers.
- 5) Standard parts are normally ordered using the Syfer order code system (see page 26), but are also available as Novacap parts using dielectric code RB (see page 25). Note the RB nomenclature is being phased out and is not recommended for new designs, rather the Syfer brand part number should be used.



# X7R (2R1) — AEC-Q200 and Standard Ranges

CONTINUED

16V TO 12KV

|                       | X7R(2R1) | 2225          |                   |               | 3640          |                       | 5550          | 8060          |
|-----------------------|----------|---------------|-------------------|---------------|---------------|-----------------------|---------------|---------------|
| Maximum Thickness (T) |          | 2.5mm         | 2.5mm             | 4.0mm         | 2.5mm         | 4.5mm                 | 2.5mm         | 2.5mm         |
| Special Requirements  |          | -             | Conformal Coating | -             | -             | Suffix Code WS2 (WS3) | -             | -             |
| 16V                   | AEC-Q200 | -             | -                 | -             | -             | -                     | -             | -             |
|                       | Standard | 330pF - 6.8μF | -                 | -             | -             | -                     | -             | -             |
| 25V                   | AEC-Q200 | -             | -                 | -             | -             | -                     | -             | -             |
|                       | Standard | 330pF - 5.6μF | -                 | -             | -             | -                     | -             | -             |
| 50/ 63V               | AEC-Q200 | 330pF - 3.3μF | -                 | -             | 470pF - 4.7μF | -                     | -             | -             |
|                       | Standard | 330pF - 3.3μF | -                 | -             | 470pF - 10μF  | -                     | 1.0nF - 15μF  | 2.2nF - 22μF  |
| 100V                  | AEC-Q200 | 330pF - 2.2μF | -                 | -             | 470pF - 3.3μF | -                     | -             | -             |
|                       | Standard | 330pF - 2.7μF | -                 | -             | 470pF - 5.6μF | -                     | 1.0nF - 10μF  | 2.2nF - 15μF  |
| 200                   | AEC-Q200 | 330pF - 1.5μF | -                 | 1.8μF - 2.2μF | 470pF - 1.5μF | -                     | -             | -             |
|                       | Standard | 330pF - 1.5μF | -                 | 1.8μF - 2.2μF | 470pF - 3.3μF | 3.9μF - 5.6μF         | 1.0nF - 5.6μF | 2.2nF - 10μF  |
| 250V                  | AEC-Q200 | 330pF - 1.5μF | -                 | 1.8μF - 2.2μF | 470pF - 1.5μF | -                     | -             | -             |
|                       | Standard | 330pF - 1.5μF | -                 | 1.8μF - 2.2μF | 470pF - 3.3μF | 3.9μF - 5.6μF         | 1.0nF - 5.6μF | 2.2nF - 10μF  |
| 500V                  | AEC-Q200 | 330pF - 1.0μF | -                 | -             | 470pF - 1.0μF | -                     | -             | -             |
|                       | Standard | 330pF - 1.0μF | -                 | -             | 470pF - 1.0μF | 1.2μF - 2.7μF         | 1.0nF - 1.8μF | 2.2nF - 3.3μF |
| 630V                  | AEC-Q200 | 330pF - 680nF | -                 | -             | 470pF - 680nF | -                     | -             | -             |
|                       | Standard | 330pF - 680nF | -                 | -             | 470pF - 680nF | 820nF - 2.2μF         | 1.0nF - 1.2μF | 2.2nF - 2.2μF |
| 1kV                   | AEC-Q200 | 330pF - 220nF | -                 | -             | 470nF - 180nF | 220nF - 1.0μF         | -             | -             |
|                       | Standard | 330pF - 220nF | -                 | -             | 470pF - 180nF | 220nF - 1.0μF         | 1.0nF - 390nF | 2.2nF - 1.0μF |
| 1.2kV                 | AEC-Q200 | 330pF - 100nF | -                 | -             | 470pF - 150nF | -                     | -             | -             |
|                       | Standard | 330pF - 100nF | -                 | -             | 470pF - 150nF | (180nF - 470nF)       | 1.0nF - 220nF | 2.2nF - 470nF |
| 1.5kV                 | AEC-Q200 | 330pF - 100nF | -                 | -             | 470pF - 100nF | -                     | -             | -             |
|                       | Standard | 330pF - 100nF | -                 | -             | 470pF - 100nF | (120nF - 330nF)       | 1.0nF - 150nF | 2.2nF - 330nF |
| 2kV                   | AEC-Q200 | 330pF - 47nF  | -                 | -             | 470pF - 47nF  | -                     | -             | -             |
|                       | Standard | 330pF - 47nF  | -                 | -             | 470pF - 47nF  | (56nF - 150nF)        | 1.0nF - 82nF  | 2.2nF - 150nF |
| 2.5kV                 | AEC-Q200 | 330pF - 12nF  | 15nF - 33nF       | -             | 470pF - 22nF  | -                     | -             | -             |
|                       | Standard | 330pF - 12nF  | 15nF - 33nF       | -             | 470pF - 33nF  | -                     | 1.0nF - 68nF  | 2.2nF - 100nF |
| 3kV                   | AEC-Q200 | 330pF - 8.2nF | 10nF - 18nF       | -             | 470pF - 18nF  | -                     | -             | -             |
|                       | Standard | 330pF - 8.2nF | 10nF - 18nF       | -             | 470pF - 22nF  | -                     | 1.0nF - 47nF  | 2.2nF - 82nF  |
| 4kV*                  | AEC-Q200 | 2.2nF - 5.6nF | 6.8nF - 10nF      | -             | -             | -                     | -             | -             |
|                       | Standard | 330pF - 5.6nF | 6.8nF - 10nF      | -             | 470pF - 6.8nF | -                     | 1.0nF - 15nF  | 2.2nF - 33nF  |
| 5kV*                  | Standard | 330pF - 4.7nF | -                 | -             | 470pF - 5.6nF | -                     | 1.0nF - 10nF  | 2.2nF - 22nF  |
| 6kV*                  | Standard | 330pF - 2.7nF | -                 | -             | 470pF - 4.7nF | -                     | 1.0nF - 8.2nF | 2.2nF - 15nF  |
| 8kV*                  | Standard | -             | -                 | -             | 470pF - 1.5nF | -                     | 1.0nF - 4.7nF | 2.2nF - 6.8nF |
| 10kV*                 | Standard | -             | -                 | -             | 470pF - 1.0nF | -                     | 1.0nF - 2.2nF | 2.2nF - 4.7nF |
| 12kV*                 | Standard | -             | -                 | -             | 470pF - 820pF | -                     | 1.0nF - 1.2nF | 2.2nF - 2.2nF |

**Notes:**

- 1) \*Parts rated 4kV and above may require conformal coating post soldering.
- 2) "Conformal Coating" identifies parts that must be conformally coated after mounting to prevent flashover, especially between the board and the component.
- 3) Suffix codes WS2 and WS3 relate to StackiCap™ high capacitance parts. WS3 parts (shown in parentheses) must be conformally coated after mounting, especially between the board and the component.

- 4) Parts in this range may be dual use under export control legislation and as such may be subject to export license restrictions. Please refer to page 15 for more information on the dual-use regulations and contact the Knowles Precision Devices sales office for further information on specific part numbers.

- 5) Standard parts are normally ordered using the Syfer order code system (see page 26), but are also available as Novacap parts using dielectric code RB (see page 25). Note the RB nomenclature is being phased out and is not recommended for new designs, rather the Syfer brand part number should be used.





# Ordering Information — AEC-Q200 and Standard Ranges

## ORDERING INFORMATION — AEC-Q200 RANGES

| 0805   | Y   | 100  | 0103   | K  | S  | T  | ---  |
|--|---|--|--|--|--|--|--|
| Chip Size  | Termination   | Voltage  | Capacitance in Picofarads (pF)   | Capacitance Tolerance  | Dielectric Release Codes   | Packaging  | Suffix Code                                      |
| 0603<br>0805<br>1206<br>1210<br>1808<br>1812<br>1825<br>2220<br>2225<br>3640 | Y = FlexiCap™ termination base with Ni barrier (100% matte tin plating). RoHS compliant.<br><br>H = FlexiCap™ termination base with Ni barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.<br><br>J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br><br>A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.<br><br>Note: X7R (2R1) to AEC-Q200 is only available in Y or H termination. | 016 = 16V<br>025 = 25V<br>050 = 50V<br>063 = 63V<br>100 = 100V<br>200 = 200V<br>250 = 250V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>1K2 = 1.2kV<br>1K5 = 1.5kV<br>2K0 = 2kV<br>2K5 = 2.5kV<br>3K0 = 3kV | First digit is 0.<br><br>Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following<br><br>Example: 0103 = 10nF | F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20%<br><br>Note:<br>X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NPO (1B) to AEC-Q200 — original<br><br>K = COG/NPO (1B) to AEC-Q200 — recommended<br><br>E = X7R (2R1) to AEC-Q200 — original<br><br>S = X7R (2R1) to AEC-Q200 — recommended | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays | For StackiCap™ parts only:<br><br>WS2<br><br>WS3 |

Note: Suffix code WS3 applies to StackiCap™ parts rated ≥1.2kV, and indicates conformal coating is required after mounting. For StackiCap™ parts rated <1.2kV, use suffix WS2.

## ORDERING INFORMATION — STANDARD RANGES

| 1210   | Y   | 200   | 0103   | K  | C                                     | T  | ---  |
|--|---|---|--|--|---------------------------------------|--|--|
| Chip Size  | Termination   | Voltage   | Capacitance in Picofarads (pF)   | Capacitance Tolerance  | Dielectric Release Codes              | Packaging  | Suffix Code                                      |
| 0402<br>0603<br>0805<br>1206<br>1210<br>1808<br>1812<br>1825<br>2220<br>2225<br>3640<br>5550<br>8060 | Y = FlexiCap™ termination base with Ni barrier (100% matte tin plating). RoHS compliant.<br><br>H = FlexiCap™ termination base with Ni barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.<br><br>J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br><br>A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. | 010 = 10V<br>016 = 16V<br>025 = 25V<br>050 = 50V<br>063 = 63V<br>100 = 100V<br>200 = 200V<br>250 = 250V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>1K2 = 1.2kV<br>1K5 = 1.5kV<br>2K0 = 2kV<br>2K5 = 2.5kV<br>3K0 = 3kV<br>4K0 = 4kV<br>5K0 = 5kV<br>6K0 = 6kV<br>8K0 = 8kV<br>10K = 10kV<br>12K = 12kV | First digit is 0.<br><br>Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following<br><br>Example: 0103 = 10nF | F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20%<br><br>Note:<br>X7R (2R1) parts are available in J, K & M tolerances only. | C = COG/NPO (1B)<br><br>X = X7R (2R1) | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays | For StackiCap™ parts only:<br><br>WS2<br><br>WS3 |

**Notes:**

- 1) Suffix code WS3 applies to StackiCap™ parts rated ≥1.2kV, and indicates conformal coating is required after mounting. For StackiCap™ parts rated <1.2kV, use suffix WS2.
- 2) Standard parts are normally ordered using the Syfer order code system (see page 26), but are also available as Novacap parts using dielectric codes RN and RB (see page 25). Note the RN and RB nomenclature is being phased out and is not recommended for new designs, rather the Syfer brand part number should be used.



# Novacap Range (Lead-Containing)

## COG/NPO (1B) NOVACAP BRAND N RANGE – CAPACITANCE VALUES

| COG/NPO (1B) | 0402  | 0504   | 0603   | 0805   | 1005   | 1206   | 1210   | 1515  | 1808   |        | 1812   |       | 1825   |        |
|--------------|-------|--------|--------|--------|--------|--------|--------|-------|--------|--------|--------|-------|--------|--------|
| Max. T.      | 0.6mm | 1.12mm | 0.89mm | 1.37mm | 1.37mm | 1.63mm | 1.65mm | 3.3mm | 1.65mm | 2.03mm | 1.65mm | 2.5mm | 2.03mm | 3.56mm |
| Min. Cap.    | 0.3pF | 0.5pF  | 0.3pF  | 0.5pF  | 0.5pF  | 3.3pF  | 5.6pF  | 3.3pF | 5.6pF  | 5.6pF  | 10pF   | 10pF  | 15pF   | 15pF   |
| 16V          | 270pF | 2.2nF  | 1.5nF  | 5.6nF  | 8.2nF  | 15nF   | 27nF   | 47nF  | 39nF   | 39nF   | 56nF   | 56nF  | 100nF  | 100nF  |
| 25V          | 220pF | 1.8nF  | 1.2nF  | 4.7nF  | 6.8nF  | 12nF   | 27nF   | 39nF  | 33nF   | 33nF   | 56nF   | 56nF  | 100nF  | 100nF  |
| 50V          | 180pF | 1.5nF  | 1.0nF  | 3.9nF  | 5.6nF  | 12nF   | 22nF   | 33nF  | 22nF   | 27nF   | 39nF   | 39nF  | 100nF  | 100nF  |
| 100V         | 180pF | 1.5nF  | 1.0nF  | 3.9nF  | 5.6nF  | 10nF   | 18nF   | 33nF  | 15nF   | 22nF   | 27nF   | 39nF  | 68nF   | 82nF   |
| 200V         | 100pF | 820pF  | 560pF  | 1.8nF  | 2.7nF  | 5.6nF  | 10nF   | 22nF  | 10nF   | 15nF   | 18nF   | 27nF  | 47nF   | 68nF   |
| 250V         | 56pF  | 560pF  | 330pF  | 1.5nF  | 2.2nF  | 3.9nF  | 8.2nF  | 22nF  | 6.8nF  | 10nF   | 15nF   | 22nF  | 39nF   | 56nF   |
| 300V         | -     | -      | -      | 820pF  | 1.2nF  | 2.7nF  | 4.7nF  | 15nF  | 5.6nF  | 10nF   | 15nF   | 22nF  | 39nF   | 47nF   |
| 400V         | -     | -      | -      | 820pF  | 1.2nF  | 1.8nF  | 4.7nF  | 10nF  | 4.7nF  | 4.7nF  | 10nF   | 12nF  | 22nF   | 33nF   |
| 500V         | -     | -      | -      | 820pF  | 1.2nF  | 1.8nF  | 3.9nF  | 8.2nF | 4.7nF  | 4.7nF  | 10nF   | 12nF  | 22nF   | 27nF   |
| 600V         | -     | -      | -      | 680pF  | 1.0nF  | 1.5nF  | 3.3nF  | 6.8nF | 3.9nF  | 4.7nF  | 8.2nF  | 10nF  | 18nF   | 18nF   |
| 800V         | -     | -      | -      | 680pF  | 1.0nF  | 1.5nF  | 3.3nF  | 6.8nF | 3.9nF  | 4.7nF  | 8.2nF  | 10nF  | 18nF   | 18nF   |
| 1000V        | -     | -      | -      | 470pF  | 390pF  | 1.0nF  | 2.2nF  | 5.6nF | 2.2nF  | 3.3nF  | 4.7nF  | 8.2nF | 10nF   | 15nF   |
| 1500V        | -     | -      | -      | -      | -      | 560pF  | 1.2nF  | 3.9nF | 1.2nF  | 1.8nF  | 2.7nF  | 4.7nF | 5.6nF  | 10nF   |
| 2000V        | -     | -      | -      | -      | -      | 390pF  | 820pF  | 2.7nF | 820pF  | 1.2nF  | 1.8nF  | 2.7nF | 2.7nF  | 5.6nF  |
| 3000V        | -     | -      | -      | -      | -      | -      | -      | 1.2nF | 390pF  | 470pF  | 820pF  | 1.2nF | 1.2nF  | 2.2nF  |
| 4000V        | -     | -      | -      | -      | -      | -      | -      | 680pF | 270pF  | 270pF  | 470pF  | 680pF | 680pF  | 1.2nF  |
| 5000V        | -     | -      | -      | -      | -      | -      | -      | -     | -      | -      | -      | -     | 390pF  | 820pF  |

| COG/NPO (1B) | 2020   | 2221   | 2225   |        | 2520   | 3333   | 3530   | 4040   | 4540   | 5440   | 5550   | 6560   | 7565   |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Max. T.      | 4.57mm | 2.03mm | 2.03mm | 3.81mm | 4.57mm | 6.35mm | 6.35mm | 7.62mm | 7.62mm | 7.62mm | 7.62mm | 7.62mm | 7.62mm |
| Min. Cap.    | 27pF   | 27pF   | 27pF   | 27pF   | 39pF   | 39pF   | 39pF   | 39pF   | 39pF   | 39pF   | 39pF   | 56pF   | 100pF  |
| 16V          | 68nF   | 100nF  | 120nF  | 120nF  | 100nF  | 180nF  | 180nF  | 330nF  | 330nF  | 390nF  | 390nF  | 680nF  | 820nF  |
| 25V          | 68nF   | 100nF  | 120nF  | 120nF  | 100nF  | 180nF  | 180nF  | 330nF  | 330nF  | 390nF  | 390nF  | 680nF  | 820nF  |
| 50V          | 68nF   | 100nF  | 120nF  | 120nF  | 100nF  | 150nF  | 180nF  | 270nF  | 330nF  | 390nF  | 390nF  | 680nF  | 820nF  |
| 100V         | 56nF   | 68nF   | 82nF   | 100nF  | 82nF   | 120nF  | 150nF  | 220nF  | 270nF  | 270nF  | 270nF  | 470nF  | 560nF  |
| 200V         | 56nF   | 47nF   | 56nF   | 82nF   | 68nF   | 100nF  | 120nF  | 180nF  | 220nF  | 270nF  | 270nF  | 470nF  | 560nF  |
| 250V         | 47nF   | 39nF   | 47nF   | 68nF   | 56nF   | 100nF  | 120nF  | 180nF  | 180nF  | 220nF  | 220nF  | 390nF  | 470nF  |
| 300V         | 39nF   | 22nF   | 27nF   | 56nF   | 47nF   | 82nF   | 100nF  | 150nF  | 180nF  | 220nF  | 220nF  | 390nF  | 470nF  |
| 400V         | 33nF   | 22nF   | 27nF   | 39nF   | 39nF   | 56nF   | 82nF   | 120nF  | 150nF  | 180nF  | 180nF  | 330nF  | 390nF  |
| 500V         | 27nF   | 22nF   | 27nF   | 33nF   | 39nF   | 47nF   | 68nF   | 100nF  | 120nF  | 150nF  | 180nF  | 270nF  | 330nF  |
| 600V         | 15nF   | 18nF   | 27nF   | 27nF   | 22nF   | 39nF   | 39nF   | 82nF   | 82nF   | 100nF  | 150nF  | 220nF  | 270nF  |
| 800V         | 15nF   | 18nF   | 27nF   | 27nF   | 18nF   | 33nF   | 33nF   | 56nF   | 68nF   | 82nF   | 120nF  | 180nF  | 220nF  |
| 1000V        | 10nF   | 10nF   | 15nF   | 22nF   | 12nF   | 27nF   | 27nF   | 56nF   | 56nF   | 68nF   | 100nF  | 150nF  | 180nF  |
| 1500V        | 8.2nF  | 5.6nF  | 8.2nF  | 15nF   | 10nF   | 18nF   | 22nF   | 39nF   | 39nF   | 39nF   | 56nF   | 82nF   | 120nF  |
| 2000V        | 4.7nF  | 2.7nF  | 3.9nF  | 8.2nF  | 5.6nF  | 15nF   | 15nF   | 27nF   | 33nF   | 33nF   | 47nF   | 68nF   | 100nF  |
| 3000V        | 2.2nF  | 1.2nF  | 1.8nF  | 3.3nF  | 2.7nF  | 8.2nF  | 10nF   | 18nF   | 22nF   | 22nF   | 33nF   | 47nF   | 68nF   |
| 4000V        | 1.2nF  | 680pF  | 1.0nF  | 1.8nF  | 1.5nF  | 3.3nF  | 5.6nF  | 12nF   | 12nF   | 12nF   | 18nF   | 27nF   | 39nF   |
| 5000V        | 820pF  | 390pF  | 560pF  | 1.2nF  | 1.0nF  | 2.2nF  | 3.3nF  | 6.8nF  | 8.2nF  | 8.2nF  | 12nF   | 18nF   | 22nF   |
| 6000V        | -      | -      | -      | -      | -      | 1.8nF  | 1.8nF  | 3.9nF  | 3.9nF  | 4.7nF  | 5.6nF  | 10nF   | 12nF   |
| 7000V        | -      | -      | -      | -      | -      | -      | 1.2nF  | 2.7nF  | 2.7nF  | 3.3nF  | 4.7nF  | 6.8nF  | 8.2nF  |
| 8000V        | -      | -      | -      | -      | -      | -      | 1.0nF  | 2.2nF  | 2.2nF  | 2.7nF  | 3.3nF  | 5.6nF  | 6.8nF  |
| 9000V        | -      | -      | -      | -      | -      | -      | 820pF  | 1.5nF  | 1.8nF  | 1.8nF  | 2.7nF  | 3.9nF  | 4.7nF  |
| 10000V       | -      | -      | -      | -      | -      | -      | 680pF  | 1.2nF  | 1.5nF  | 1.5nF  | 2.2nF  | 3.3nF  | 3.9nF  |

Order using Novacap dielectric code N (see page 25). Lead-free alternatives are available using Syfer Brand.



# Novacap Range (Lead-Containing)

## X7R (2R1) NOVACAP BRAND B RANGE — CAPACITANCE VALUES

| X7R (2R1) | 0402  | 0504   | 0603   | 0805   | 1005   | 1206   | 1210   | 1515  | 1808   |        | 1812   |       | 1825   |        |
|-----------|-------|--------|--------|--------|--------|--------|--------|-------|--------|--------|--------|-------|--------|--------|
| Max. T.   | 0.6mm | 1.12mm | 0.89mm | 1.37mm | 1.37mm | 1.63mm | 1.65mm | 3.3mm | 1.65mm | 2.03mm | 1.65mm | 2.5mm | 2.03mm | 3.56mm |
| Min. Cap. | 120pF | 120pF  | 120pF  | 120pF  | 120pF  | 120pF  | 120pF  | 150pF | 150pF  | 150pF  | 150pF  | 150pF | 470pF  | 470pF  |
| 16V       | 5.6nF | 39nF   | 27nF   | 120nF  | 150nF  | 330nF  | 470nF  | 1.2uF | 680nF  | 820nF  | 1.2uF  | 1.5uF | 1.8uF  | 2.2uF  |
| 25V       | 4.7nF | 33nF   | 22nF   | 100nF  | 120nF  | 270nF  | 470nF  | 1.0uF | 560nF  | 560nF  | 1.0uF  | 1.2uF | 1.5uF  | 2.2uF  |
| 50V       | 4.7nF | 33nF   | 22nF   | 100nF  | 120nF  | 270nF  | 470nF  | 820nF | 390nF  | 560nF  | 820nF  | 1.2uF | 1.5uF  | 2.2uF  |
| 100V      | 4.7nF | 33nF   | 22nF   | 68nF   | 82nF   | 180nF  | 330nF  | 680nF | 270nF  | 390nF  | 560nF  | 820nF | 1.2uF  | 1.8uF  |
| 200V      | 2.2nF | 15nF   | 10nF   | 33nF   | 47nF   | 100nF  | 180nF  | 560nF | 180nF  | 220nF  | 330nF  | 560nF | 820nF  | 1.5uF  |
| 250V      | 1.5nF | 10nF   | 6.8nF  | 27nF   | 39nF   | 68nF   | 120nF  | 390nF | 120nF  | 150nF  | 220nF  | 390nF | 680nF  | 1.2uF  |
| 300V      | -     | -      | -      | 15nF   | 18nF   | 47nF   | 82nF   | 270nF | 82nF   | 100nF  | 150nF  | 220nF | 470nF  | 820nF  |
| 400V      | -     | -      | -      | 12nF   | 12nF   | 27nF   | 56nF   | 220nF | 56nF   | 82nF   | 100nF  | 180nF | 330nF  | 560nF  |
| 500V      | -     | -      | -      | 12nF   | 8.2nF  | 22nF   | 56nF   | 150nF | 56nF   | 68nF   | 100nF  | 150nF | 330nF  | 470nF  |
| 600V      | -     | -      | -      | 8.2nF  | 8.2nF  | 18nF   | 39nF   | 120nF | 39nF   | 56nF   | 68nF   | 120nF | 220nF  | 390nF  |
| 800V      | -     | -      | -      | 4.7nF  | 4.7nF  | 10nF   | 27nF   | 82nF  | 27nF   | 33nF   | 47nF   | 68nF  | 120nF  | 270nF  |
| 1000V     | -     | -      | -      | 2.7nF  | 2.7nF  | 6.8nF  | 15nF   | 56nF  | 15nF   | 22nF   | 27nF   | 47nF  | 82nF   | 150nF  |
| 1500V     | -     | -      | -      | -      | -      | 2.2nF  | 4.7nF  | 18nF  | 4.7nF  | 6.8nF  | 8.2nF  | 15nF  | 27nF   | 56nF   |
| 2000V     | -     | -      | -      | -      | -      | 1.0nF  | 2.2nF  | 8.2nF | 2.7nF  | 3.3nF  | 4.7nF  | 6.8nF | 12nF   | 27nF   |
| 3000V     | -     | -      | -      | -      | -      | -      | -      | 1.5nF | 560pF  | 820pF  | 1.2nF  | 2.2nF | 2.7nF  | 4.7nF  |
| 4000V     | -     | -      | -      | -      | -      | -      | -      | 1.2nF | 390pF  | 390pF  | 680pF  | 1.2nF | 1.5nF  | 2.7nF  |
| 5000V     | -     | -      | -      | -      | -      | -      | -      | -     | -      | -      | -      | -     | 820pF  | 1.8nF  |

| X7R (2R1) | 2020   | 2221   | 2225   |        | 2520   | 3333   | 3530   | 4040   | 4540   | 5440   | 5550   | 6560   | 7565   |
|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Max. T.   | 4.57mm | 2.03mm | 2.03mm | 3.81mm | 4.57mm | 6.35mm | 6.35mm | 7.62mm | 7.62mm | 7.62mm | 7.62mm | 7.62mm | 7.62mm |
| Min. Cap. | 470pF  | 470pF  | 470pF  | 470pF  | 1.0nF  | 1.0nF  | 1.0nF  | 1.0nF  | 1.0nF  | 1.0nF  | 1.0nF  | 2.2nF  | 2.2nF  |
| 16V       | 1.8uF  | 1.5uF  | 2.2uF  | 2.7uF  | 3.3uF  | 4.7uF  | 4.7uF  | 8.2uF  | 8.2uF  | 10uF   | 12uF   | 18uF   | 22uF   |
| 25V       | 1.5uF  | 1.2uF  | 1.8uF  | 2.2uF  | 2.7uF  | 4.7uF  | 4.7uF  | 6.8uF  | 6.8uF  | 10uF   | 10uF   | 18uF   | 22uF   |
| 50V       | 1.5uF  | 1.2uF  | 1.8uF  | 2.2uF  | 2.7uF  | 3.9uF  | 3.9uF  | 6.8uF  | 6.8uF  | 8.2uF  | 10uF   | 15uF   | 18uF   |
| 100V      | 1.5uF  | 1.2uF  | 1.5uF  | 2.2uF  | 2.7uF  | 3.9uF  | 3.9uF  | 5.6uF  | 6.8uF  | 8.2uF  | 8.2uF  | 12uF   | 18uF   |
| 200V      | 1.2uF  | 680nF  | 1.0uF  | 1.8uF  | 2.2uF  | 3.3uF  | 3.3uF  | 5.6uF  | 5.6uF  | 6.8uF  | 8.2uF  | 8.2uF  | 15uF   |
| 250V      | 1.0uF  | 560nF  | 820nF  | 1.5nF  | 1.8uF  | 2.7uF  | 2.7uF  | 4.7uF  | 5.6uF  | 6.8uF  | 6.8uF  | 8.2uF  | 12uF   |
| 300V      | 820nF  | 390nF  | 470nF  | 1.0uF  | 1.2uF  | 2.2uF  | 2.2uF  | 4.7uF  | 4.7uF  | 5.6uF  | 6.8uF  | 6.8uF  | 10uF   |
| 400V      | 560nF  | 270nF  | 390nF  | 680nF  | 820nF  | 1.2uF  | 1.2uF  | 2.2uF  | 2.7uF  | 2.7uF  | 3.3uF  | 4.7uF  | 8.2uF  |
| 500V      | 470nF  | 270nF  | 330nF  | 560nF  | 680nF  | 1.0uF  | 1.0uF  | 1.8uF  | 1.8uF  | 1.8uF  | 2.2uF  | 3.3uF  | 4.7uF  |
| 600V      | 270nF  | 220nF  | 270nF  | 470nF  | 390nF  | 680nF  | 680nF  | 1.5uF  | 1.5uF  | 1.5uF  | 2.2uF  | 2.7uF  | 3.9uF  |
| 800V      | 220nF  | 120nF  | 150nF  | 330nF  | 270nF  | 470nF  | 390nF  | 680nF  | 820nF  | 1.0uF  | 1.5uF  | 2.2uF  | 2.7uF  |
| 1000V     | 150nF  | 82nF   | 100nF  | 220nF  | 180nF  | 330nF  | 330nF  | 560nF  | 680nF  | 680nF  | 1.0uF  | 1.5uF  | 1.8uF  |
| 1500V     | 39nF   | 27nF   | 33nF   | 68nF   | 56nF   | 120nF  | 120nF  | 270nF  | 330nF  | 330nF  | 470nF  | 680nF  | 820nF  |
| 2000V     | 27nF   | 12nF   | 15nF   | 33nF   | 27nF   | 82nF   | 68nF   | 150nF  | 180nF  | 180nF  | 270nF  | 390nF  | 470nF  |
| 3000V     | 4.7nF  | 2.7nF  | 3.3nF  | 6.8nF  | 8.2nF  | 33nF   | 27nF   | 47nF   | 56nF   | 68nF   | 82nF   | 120nF  | 180nF  |
| 4000V     | 2.7nF  | 1.5nF  | 1.5nF  | 3.3nF  | 4.7nF  | 18nF   | 15nF   | 22nF   | 33nF   | 39nF   | 47nF   | 82nF   | 100nF  |
| 5000V     | 1.5nF  | 820pF  | 1.0nF  | 2.2nF  | 2.7nF  | 12nF   | 10nF   | 12nF   | 18nF   | 22nF   | 33nF   | 47nF   | 56nF   |
| 6000V     | -      | -      | -      | -      | -      | 6.8nF  | 5.6nF  | 8.2nF  | 12nF   | 15nF   | 22nF   | 33nF   | 39nF   |
| 7000V     | -      | -      | -      | -      | -      | 4.7nF  | 4.7nF  | 5.6nF  | 8.2nF  | 10nF   | 15nF   | 22nF   | 27nF   |
| 8000V     | -      | -      | -      | -      | -      | -      | 3.3nF  | 4.7nF  | 6.8nF  | 8.2nF  | 12nF   | 15nF   | 22nF   |
| 9000V     | -      | -      | -      | -      | -      | -      | 2.7nF  | 3.3nF  | 4.7nF  | 5.6nF  | 10nF   | 12nF   | 18nF   |
| 10000V    | -      | -      | -      | -      | -      | -      | 1.8nF  | 2.7nF  | 3.9nF  | 4.7nF  | 6.8nF  | 10nF   | 12nF   |

Order using Novacap dielectric code B (see page 25). Lead-free alternatives are available using Syfer Brand.



## Standard Chip — BX

Manufactured with layer thickness, and minimal voltage coefficient, to meet BX requirements. BX characteristics are identical to X7R dielectric with the added restriction that the Temperature-Voltage Coefficient (TVC) does not exceed -25% at rated voltage, over -55°C to +125°C operating temperature.

High Reliability Testing available: HB = MIL-PRF-55681 Group A.  
HK = MIL-PRF-38534 Class K. HS = MIL-PRF-123 Group A.

- For dimensions, see page 23.
- For termination types, see page 9.
- For ordering information, see page 25.



## CAPACITANCE AND VOLTAGE SELECTION — BX

| Size     | 0402  | 0504  | 0603  | 0805  | 1005  | 1206  | 1210  | 1808  | 1812  | 1825  | 2221  | 2225  |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Min cap. | 120pF | 120pF | 120pF | 120pF | 120pF | 120pF | 120pF | 150pF | 150pF | 470pF | 470pF | 470pF |
| 16V      | 5.6nF | 39nF  | 27nF  | 100nF | 120nF | 270nF | 470nF | 560nF | 1.0μF | 1.8μF | 1.5μF | 2.2μF |
| 25V      | 4.7nF | 33nF  | 22nF  | 100nF | 120nF | 270nF | 470nF | 560nF | 1.0μF | 1.5μF | 1.2μF | 1.8μF |
| 50V      | 1.8nF | 18nF  | 12nF  | 47nF  | 68nF  | 120nF | 270nF | 270nF | 560nF | 1.2μF | 1.2μF | 1.5μF |
| 100V     | 680pF | 6.8nF | 4.7nF | 18nF  | 18nF  | 47nF  | 100nF | 100nF | 180nF | 390nF | 330nF | 470nF |
| 200V     | 220pF | 1.8nF | 1.2nF | 5.6nF | 8.2nF | 15nF  | 27nF  | 33nF  | 56nF  | 100nF | 82nF  | 120nF |
| 250V     | -     | 680pF | 390pF | 1.8nF | 2.7nF | 4.7nF | 10nF  | 10nF  | 22nF  | 56nF  | 47nF  | 68nF  |
| 300V     | -     | -     | -     | 1.2nF | 1.2nF | 3.2nF | 5.6nF | 6.8nF | 12nF  | 39nF  | 33nF  | 47nF  |
| 400V     | -     | -     | -     | 680pF | 680pF | 1.8nF | 3.3nF | 3.9nF | 5.6nF | 18nF  | 18nF  | 22nF  |
| 500V     | -     | -     | -     | 390pF | 470pF | 1.0nF | 2.2nF | 2.2nF | 3.9nF | 12nF  | 10nF  | 15nF  |




# Improved ESR Capacitors — BX and X7R

A range of commercial MLC chip capacitors with improved ESR performance. This series has been designed for rugged environments in high power broadband coupling and switching power supplies. The Class II ceramic dielectric (BX or X7R, dependant on chip size) affords high volumetric efficiency with negligible piezoelectric effects.


Please consult the Knowles Precision Devices Sales Office if your specific requirement exceeds our catalog maximums (size, capacitance value and voltage).

- For dimensions, see page 23.
- Termination options:  
 P = Palladium/Silver  
 N = Nickel barrier 100% Tin (RoHS)  
 Y = Nickel barrier 90% Tin/10% Lead  
 B = Copper barrier 100% Tin (RoHS)  
 E = Copper barrier 90% Tin/10% Lead
- Capacitance tolerances available  $\pm 10\%$ ,  $\pm 20\%$
- For ordering information, see page 25.


CURRENT RATING vs. CAPACITANCE

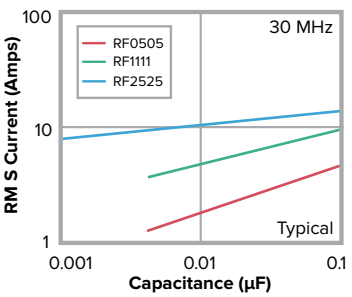


Q vs. CAPACITANCE

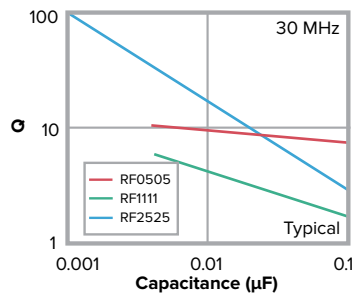

ESR vs. CAPACITANCE

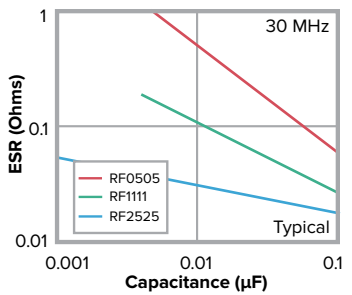

SERIES RESONANCE vs. CAPACITANCE

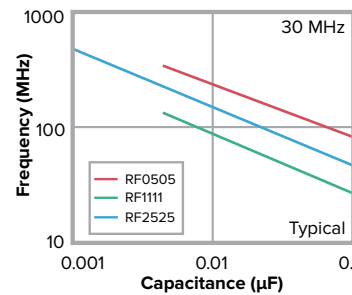

## CAPACITANCE AND VOLTAGE SELECTION — BX

| Size                 | RF0505           | RF1111           | RF2525        |     |     |     |     |
|----------------------|------------------|------------------|---------------|-----|-----|-----|-----|
| Tmax mm<br>~ inches: | 0.057 ~<br>1.45* | 0.102 ~<br>2.59* | 0.165 ~ 4.19* |     |     |     |     |
| Dielectric           | BX               | BX               | X7R           |     |     |     |     |
| Rated Voltage        | 50               | 50               | 100           | 150 | 200 | 250 | 300 |
| 470pF                | ●                |                  |               |     |     |     |     |
| 560pF                | ●                |                  |               |     |     |     |     |
| 680pF                | ●                |                  |               |     |     |     |     |
| 820pF                | ●                |                  |               |     |     |     |     |
| 1.0nF                | ●                |                  |               |     |     |     |     |
| 1.2nF                | ●                |                  |               |     |     |     |     |
| 1.5nF                | ●                |                  |               |     |     |     |     |
| 1.8nF                | ●                |                  |               |     |     |     |     |
| 2.2nF                | ●                |                  |               |     |     |     |     |
| 2.7nF                | ●                |                  |               |     |     |     |     |
| 3.3nF                | ●                |                  |               |     |     |     |     |
| 3.9nF                | ●                |                  |               |     |     |     |     |
| 4.7nF                | ●                | ●                |               |     |     |     |     |
| 5.0nF                | ●                | ●                |               |     |     |     |     |
| 5.6nF                | ●                | ●                |               |     |     |     |     |
| 6.8nF                | ●                | ●                |               |     |     |     |     |
| 8.2nF                | ●                | ●                |               |     |     |     |     |
| 10nF                 | ●                | ●                |               |     |     |     | ●   |
| 12nF                 |                  | ●                |               |     |     |     | ●   |
| 15nF                 |                  | ●                |               |     |     |     | ●   |
| 18nF                 |                  | ●                |               |     |     |     | ●   |
| 22nF                 |                  | ●                |               |     |     |     | ●   |
| 27nF                 |                  | ●                |               |     |     |     | ●   |
| 33nF                 |                  | ●                |               |     |     |     | ●   |
| 39nF                 |                  | ●                |               |     |     |     | ●   |
| 47nF                 |                  | ●                |               |     |     |     | ●   |
| 50nF                 |                  | ●                |               |     |     |     | ●   |
| 56nF                 |                  | ●                |               |     |     |     | ●   |
| 68nF                 |                  | ●                |               |     |     |     | ●   |
| 82nF                 |                  | ●                |               |     |     |     | ●   |
| 100nF                |                  | ●                |               |     |     |     | ●   |
| 120nF                |                  |                  |               |     |     |     | ●   |
| 150nF                |                  |                  |               |     |     |     | ●   |
| 220nF                |                  |                  |               |     |     |     | ●   |
| 330nF                |                  |                  |               |     |     |     | ●   |
| 470nF                |                  |                  |               |     |     |     | ●   |
| 560nF                |                  |                  |               |     |     |     | ●   |
| 680nF                |                  |                  |               |     |     |     | ●   |
| 820nF                |                  |                  |               |     |     |     | ●   |
| 1.0µF                |                  |                  |               |     |     |     | ●   |

Note: \*Denotes non standard chip thickness. Order code needs to have an "X" inserted together with the dimension in inches; e.g., X057 where dimension is 0.057".



# High Q Capacitors — Q and U Ranges

The “Q” and “U” ranges offer a very stable High Q material system that provides excellent low loss performance in systems below 3GHz. Optimized for lowest possible ESR, this range of high frequency capacitors is suitable for many applications where economical, high performance is required.

Available in 0603 to 3640 case sizes (0603 and 0805 case sizes only available in the “U” range) with various termination options, including FlexiCap™.

CapCad™ capacitor modeling software is now available and has been developed with an easy-to-use and readily accessible comparison tool for choosing the best MLCC to suit the customer’s needs. Please consult the Knowles website to launch the software.

**OPERATING TEMPERATURE** -55°C to +125°C

**TEMPERATURE COEFFICIENT (TYPICAL)**

0 ± 30 ppm/°C (COG/NPO)

**INSULATION RESISTANCE**

MS range: >100GΩ at +25°C; >10GΩ +125°C.

U range: 100GΩ or 1000s (whichever is the least)


**Q FACTOR** >2000 @ 1MHz

## MINIMUM/MAXIMUM CAPACITANCE VALUES — Q AND U RANGES — HIGH Q CAPACITORS

| Chip Size       | 0603 <sup>1</sup> | 0505   | 0805 <sup>1</sup> | 1206   | 1111   |       | 1210  | 1812  | 2220  | 2225        | 4040        |     |
|-----------------|-------------------|--------|-------------------|--------|--------|-------|-------|-------|-------|-------------|-------------|-----|
| Range           | U                 | Q      | U                 | Q      | Q      | U     | Q     | Q     | Q     | Q           | Q           |     |
| Min cap.        | 0.2pF             | 0.2pF  | 0.2pF             | 0.5pF  | 0.3pF  | 0.3pF | 0.3pF | 1.0pF | 2.0pF | -           | -           |     |
| 50V/63V         | -                 | 330pF  | -                 | 2.2nF  | -      | -     | -     | -     | -     | -           | -           |     |
| 100V            | -                 | 220pF  | -                 | 1.5nF  | 3.3nF  | 3.3nF | 3.3nF | 6.8nF | 15nF  | -           | -           |     |
| 150V            | -                 | 220pF  | -                 | 1.2nF  | 2.7nF  | 2.7nF | 2.7nF | 4.7nF | 12nF  | -           | -           |     |
| 200V            | 100pF             | 150pF  | 240pF             | 1.0nF  | 2.2nF  | 1.0nF | 2.2nF | 3.9nF | 10nF  | -           | -           |     |
| 250V            | 100pF             | 150pF  | 240pF             | 1.0nF  | 2.2nF  | 1.0nF | 2.2nF | 3.9nF | 10nF  | 6.2-10nF    | 16-27nF     |     |
| 300V            | -                 | 100pF  | -                 | 680pF  | 1.5nF  | 1.5nF | 1.5nF | 3.3nF | 6.8nF | -           | -           |     |
| 500V            | -                 | -      | -                 | 330pF  | 820pF  | 820pF | 820pF | 2.2nF | 4.7nF | 5.1-5.6nF   | 13-15nF     |     |
| 630V            | -                 | -      | -                 | 150pF  | 390pF  | 390pF | 390pF | 1.0nF | 2.2nF | 3.6-4.7nF   | 11-12nF     |     |
| 1000V           | -                 | -      | -                 | 82pF   | 220pF  | 220pF | 220pF | 680pF | 1.5nF | 1.1 - 3.3nF | 5.6-10nF    |     |
| 1500V           | -                 | -      | -                 | -      | -      | 100pF | -     | -     | -     | -           | -           |     |
| 2000V           | -                 | -      | -                 | 18pF   | 68pF   | 68pF  | 68pF  | 150pF | 470pF | 510pF-1.0nF | 1.6-5.1nF   |     |
| 3000V           | -                 | -      | -                 | -      | -      | -     | -     | 68pF  | 150pF | 110-470pF   | 910pF-1.5nF |     |
| 3600V           | -                 | -      | -                 | -      | -      | -     | -     | -     | -     | 1.0-100pF   | -           |     |
| 4000V           | -                 | -      | -                 | -      | -      | -     | -     | -     | -     | -           | 620-820pF   |     |
| 5000V           | -                 | -      | -                 | -      | -      | -     | -     | -     | -     | -           | 360-560pF   |     |
| 6000V           | -                 | -      | -                 | -      | -      | -     | -     | -     | -     | -           | 160-330pF   |     |
| 7,000/7200V     | -                 | -      | -                 | -      | -      | -     | -     | -     | -     | -           | 1.0-150pF   |     |
| Tape quantities | 7" reel           | 4,000  | 2,500             | 3,000  | 2,500  | 1,000 | 1,000 | 2,000 | 500   | 500         | 500         | -   |
|                 | 13" reel          | 16,000 | 10,000            | 12,000 | 10,000 | 5,000 | 5,000 | 8,000 | 2,000 | 2,000       | 2,000       | 500 |

## DIMENSIONS

| Range | Case Size | Length (L1) mm ~ inches               | Width (W) mm ~ inches        | Thickness (T)* mm ~ inches | Termination Band (L2) |              |
|-------|-----------|---------------------------------------|------------------------------|----------------------------|-----------------------|--------------|
|       |           |                                       |                              |                            | Min                   | Max          |
| U     | 0603      | 1.6 ± 0.20 ~ 0.063 ± 0.008            | 0.8 ± 0.2 ~ 0.032 ± 0.008    | 0.8 ~ 0.032                | 0.20 ~ 0.008          | 0.40 ~ 0.016 |
| Q     | 0505      | 1.4 +0.35/-0.25 ~ 0.055 +0.014/-0.01  | 1.4 ± 0.25 ~ 0.055 ± 0.01    | 1.27 ~ 0.05                | 0.13 ~ 0.005          | 0.5 ~ 0.02   |
| U     | 0805      | 2.0 ± 0.30 ~ 0.079 ± 0.012            | 1.25 ± 0.20 ~ 0.049 ± 0.008  | 1.3 ~ 0.051                | 0.25 ~ 0.010          | 0.75 ~ 0.03  |
| Q     | 1206      | 3.2 +0.20/-0.30 ~ 0.126 +0.008/-0.012 | 1.6 ± 0.20 ~ 0.063 ± 0.008   | 1.7 ~ 0.068                | 0.25 ~ 0.010          | 0.75 ~ 0.03  |
| Q     | 1111      | 2.79 +0.51/-0.25 ~ 0.11 +0.02/-0.01   | 2.79 ± 0.38 ~ 0.113 ± 0.015  | 1.78 ~ 0.07                | 0.13 ~ 0.005          | 0.63 ~ 0.025 |
| U     | 1111      | 2.79 +0.51/-0.25 ~ 0.11 +0.02/-0.01   | 2.79 ± 0.38 ~ 0.113 ± 0.015  | 2.0 ± 0.2 ~ 0.08 ± 0.008   | 0.13 ~ 0.005          | 0.63 ~ 0.025 |
| Q     | 1210      | 3.2 +0.20/-0.30 ~ 0.126 +0.008/-0.012 | 2.5 ± 0.30 ~ 0.098 ± 0.012   | 2.0 ~ 0.08                 | 0.25 ~ 0.010          | 0.75 ~ 0.030 |
| Q     | 1812      | 4.5 ± 0.35 ~ 0.18 ± 0.014             | 3.2 ± 0.3 ~ 0.126 ± 0.012    | 2.5 ~ 0.10                 | 0.25 ~ 0.010          | 1.43 ~ 0.045 |
| Q     | 2220      | 5.7 ± 0.40 ~ 0.225 ± 0.016            | 5.0 ± 0.40 ~ 0.197 ± 0.016   | 2.5 ~ 0.10                 | 0.381 ~ 0.01          | 1.0 ~ 0.040  |
| Q     | 2225      | 5.7 ± 0.40 ~ 0.225 ± 0.016            | 6.30 ± 0.40 ~ 0.252 ± 0.016  | 4.0 ~ 0.157                | 0.25 ~ 0.010          | 1.0 ~ 0.040  |
| Q     | 4040      | 10.2 ± 0.508 ~ 0.400 ± 0.020          | 10.2 ± 0.508 ~ 0.400 ± 0.020 | 5.0 ~ 0.197                | 0.50 ~ 0.020          | 1.50 ~ 0.06  |




\*All thicknesses are maximum dimensions unless otherwise stated.




# High Q Capacitors — Q and U Ranges


Q Series — Impedance vs. Frequency — Case Size 0505

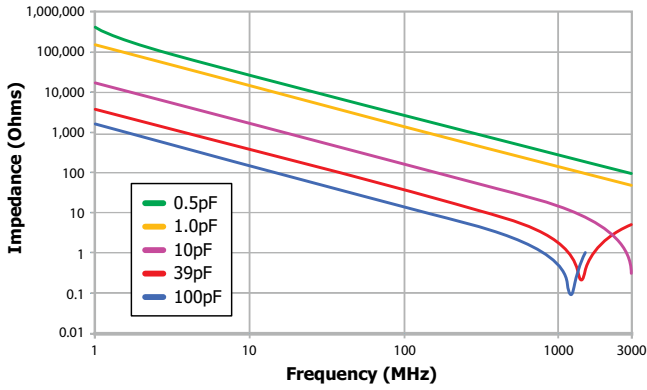


Q Series — Impedance vs. Frequency — Case Size 1111

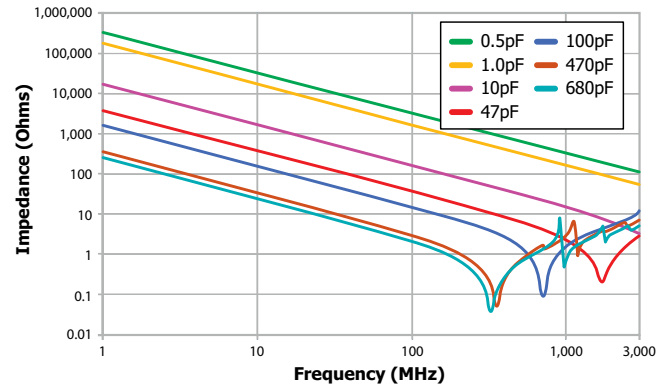


Q Series — ESR vs. Frequency — Case Size 0505

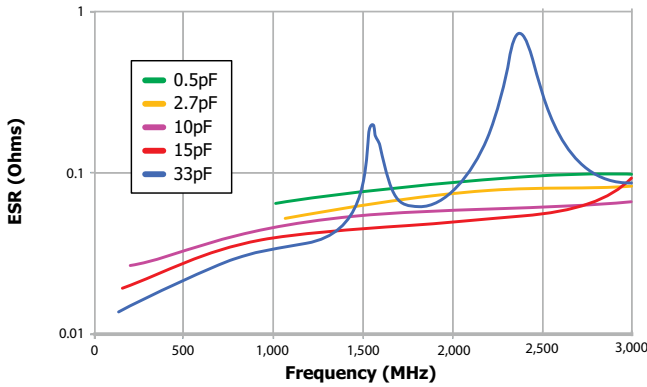


Q Series — ESR vs. Frequency — Case Size 1111

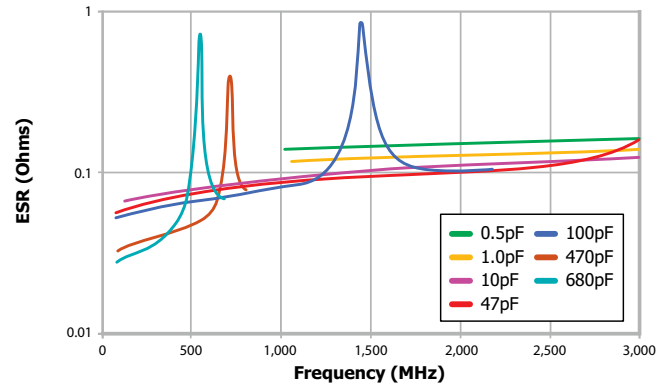

Q Series — Q vs. Frequency — Case Size 0505

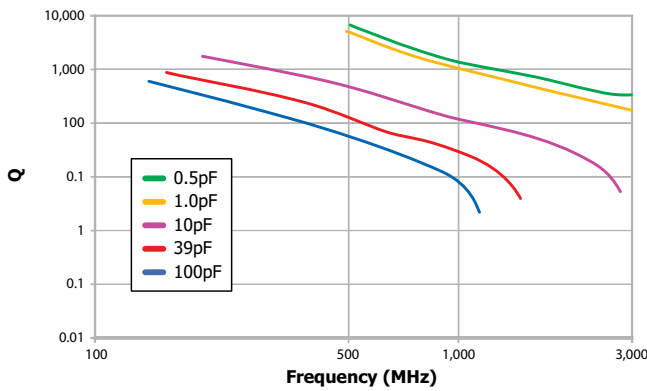

Q Series — Q vs. Frequency — Case Size 1111

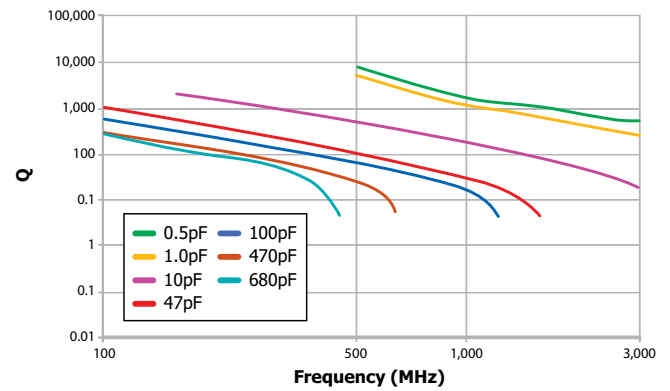


All performance curves are based on measurements taken with Boonton 34A resonant tube, Agilent E4991A impedance analyzer and Agilent 16197A test fixture. Different test methods or fixtures may give different results. Data is typical and is supplied for indication only.




# High Q Capacitors — Q and U Ranges


U Series — Impedance vs. Frequency — Case Size 0603

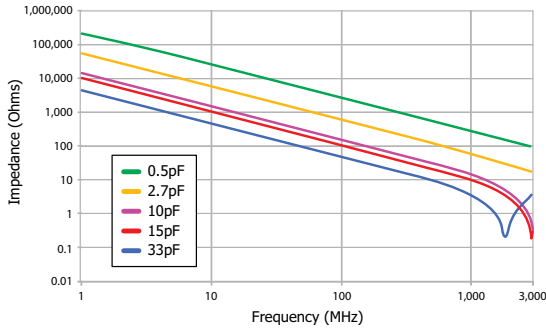


U Series — Impedance vs. Frequency — Case Size 0805

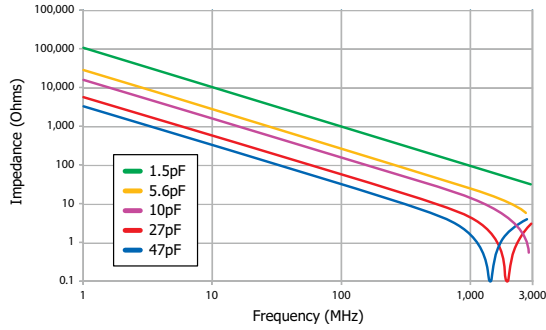


U Series — ESR vs. Frequency — Case Size 0603

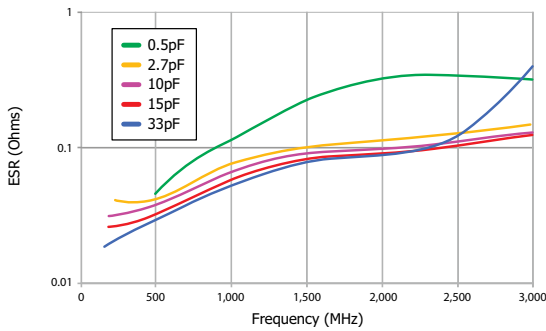


U Series — ESR vs. Frequency — Case Size 0805

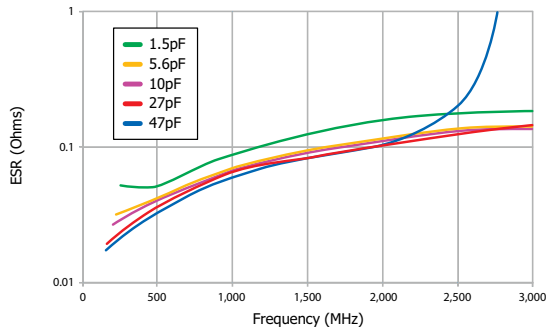

U Series — Q vs. Frequency — Case Size 0603

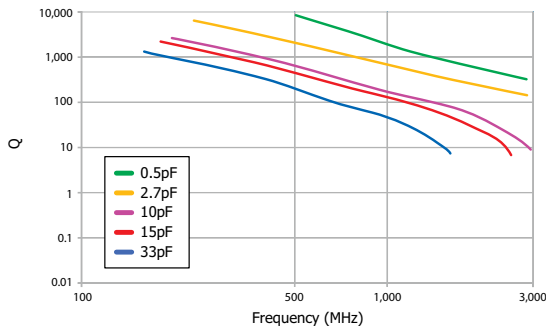

U Series — Q vs. Frequency — Case Size 0805

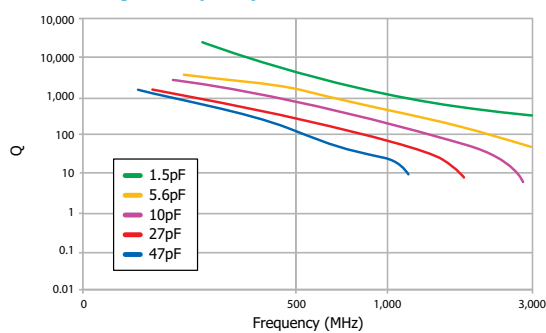

Note: All performance curves are based on measurements taken with Boonton 34A resonant tube, Agilent E4991A impedance analyzer and Agilent 16197A test fixture. Different test methods or fixtures may give different results. Data is typical and is supplied for indication only.

\*0402 size and other values (inc. values < than 0.3pF) and taping quantities may be available on request, consult the Sales Office.  
 †0603 and 0805 sizes only available in the "U" range and not Q.

## DIMENSIONS

| 0805  | J  | 250   | 4P70  | B  | U  | T  |
|---|--|---|---|--|--|--|
| Chip size   | Termination  | Voltage   | Capacitance in picofarads (pF)  | Capacitance tolerance  | Dielectric   | Packaging  |
| 0402*<br>0603†<br>0505<br>0805*<br>1206<br>1111<br>1210<br>1812<br>2220<br>2225<br>3640 | J = Nickel barrier (100% matte tin plating).<br>RoHS compliant.<br>Lead free.<br>A = Nickel barrier<br>(Tin/lead plating with min. 10% lead).<br><br>Not RoHS compliant. | 050 = 50V<br>063 = 63V<br>100 = 100V<br>150 = 150V<br>200 = 200V<br>250 = 250V<br>300 = 300V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>2K0 = 2kV<br>3K0 = 3kV | <1.0pF: Insert a P for the decimal point as the first character, e.g., P300 = 0.3pF<br>Values in 0.1pF steps<br>≥1.0pF & <10pF: Insert a P for the decimal point as the second character, e.g., 8P20 = 8.2pF<br>Values are E24 series<br>≥10pF: First digit is 0. Second and third digits are significant figures of capacitance code; fourth digit is number of zeros, e.g., 0101 = 100pF<br>Values are E24 series | <4.7pF<br>H = ±0.05pF<br>B = ±0.1pF<br>C = ±0.25pF<br>D = ±0.5pF<br><10pF<br>B = ±0.1pF<br>C = ±0.25pF<br>D = ±0.5pF<br>≥10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10% | Q = High Q version of COG/NPO<br>U = High Q version of COG/NPO | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays |





# Ultra-Low ESR High Q MLCCs — X8G Range

The Ultra-Low ESR HiQ X8G range offers a very stable, High Q material system that provides excellent low loss performance. Optimized for lowest possible ESR, the electrode system provides low metal losses resulting in flatter performance curves and reduced losses at higher frequencies.

An extended operating temperature range of -55°C to +150°C accommodates modern high density microelectronics requirements. This range of high frequency capacitors is suitable for many applications where economical, high performance is required.



## ULTRA-LOW ESR HIQ CAPACITORS — X8G RANGE — CAPACITANCE VALUES

| Chip size       | 0402              | 0505              | 0603              | 0805              | 1111             |
|-----------------|-------------------|-------------------|-------------------|-------------------|------------------|
| Thickness       | 0.6mm max         | 1.27mm max        | 0.8mm max         | 1.0mm max         | 2.0 ± 0.2mm      |
| Min cap         | 0.2pF             | 0.3pF             | 0.2pF             | 0.2pF             | 0.5pF            |
| Min cap         | 0.2pF             | 0.3pF             | 0.2pF             | 0.2pF             | -                |
| 50V             | 100pF             | 1.0nF             | 470pF             | 1.5nF             | 5.1nF            |
| 100V            | 100pF             | 560pF             | 150pF             | 1.0nF             | 5.1nF            |
| 200V            | -                 | -                 | -                 | -                 | 5.1nF            |
| 250V            | 33pF              | 270pF             | 150pF             | 820pF             | 5.1nF            |
| 500V            | 33pF              | 240pF             | 150pF             | 430pF             | 1.8nF            |
| 630V            | -                 | -                 | -                 | -                 | 1.8nF            |
| 1kV             | -                 | -                 | -                 | 47pF              | 1.8nF            |
| 1.5kV           | -                 | -                 | -                 | -                 | 820pF            |
| 2kV             | -                 | -                 | -                 | -                 | 390pF            |
| Tape quantities | 7" reel - 10,000  | 7" reel - 2,500   | 7" reel - 4,000   | 7" reel - 3,000   | 7" reel - 1,000  |
|                 | 13" reel - 15,000 | 13" reel - 10,000 | 13" reel - 16,000 | 13" reel - 12,000 | 13" reel - 5,000 |

**OPERATING TEMPERATURE:**  
-55°C to +150°C (EIA X8G)

**TEMPERATURE COEFFICIENT (TYPICAL):**  
0 ± 30 ppm/°C (EIA X8G)

**INSULATION RESISTANCE:** Time constant (Ri xCr) (whichever is the least)  
100GΩ or 1000s

**Q FACTOR:** >2000 @ 1MHz

Note: Blue background = AEC-Q200.  
Capacitance values below 1pF are in 0.1pF steps. Capacitance values higher than 1pF follow E24 series.

## ORDERING INFORMATION — ULTRA-LOW ESR HIQ CAPACITORS — X8G RANGE

| 085                                  | J  | 250  | 0101   | J  | H   | T  |
|--------------------------------------|--|--|--|--|---|--|
| Chip Size                            | Termination  | Voltage  | Capacitance in Picofarads (pF)   | Capacitance Tolerance  | Dielectric  | Packaging  |
| 0402<br>0505<br>0603<br>0805<br>1111 | J = Nickel barrier<br>(100% matte tin plating).<br>RoHS compliant.<br>Lead free. | 050 = 50V<br>100 = 100V<br>200 = 200V<br>250 = 250V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>1K5 = 1.5kV<br>2K0 = 2.0kV | <1.0pF: Insert a P for the decimal point as the first character. e.g., P300 = 0.3pF Values in 0.1pF steps<br>≥1.0pF & <10pF: Insert a P for the decimal point as the second character. e.g., 8P20 = 8.2pF Values are E24 series<br>≥10pF: First digit is 0. Second and third digits are significant figures of capacitance code. Fourth digit is number of zeros. e.g., 0101 = 100pF Values are E24 series | <4.7pF<br>H = ±0.05pF<br>B = ±0.1pF<br>C = ±0.25pF<br>D = ±0.5pF<br><br><10pF<br>B = ±0.1pF<br>C = ±0.25pF<br>D = ±0.5pF<br><br>≥10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10% | V = Ultra-Low ESR<br>High Frequency X8G to<br>AEC-Q200<br><br><br><br><br><br><br><br><br><br>H = Ultra-Low ESR High<br>Frequency X8G | T = 178mm<br>(7") horizontal reel<br><br>R = 330mm<br>(13") reel<br><br>B = Bulk pack —<br>tubs or trays<br><br>V = 178mm (7")<br>vertical reel* |


\* Vertical reel is available for case size 1111 only



# Ultra-Low ESR High Q MLCCs — X8G Range


## TYPICAL PERFORMANCE — 0603 CHIP SIZE

0603 H SERIES IMPEDANCE vs. FREQUENCY

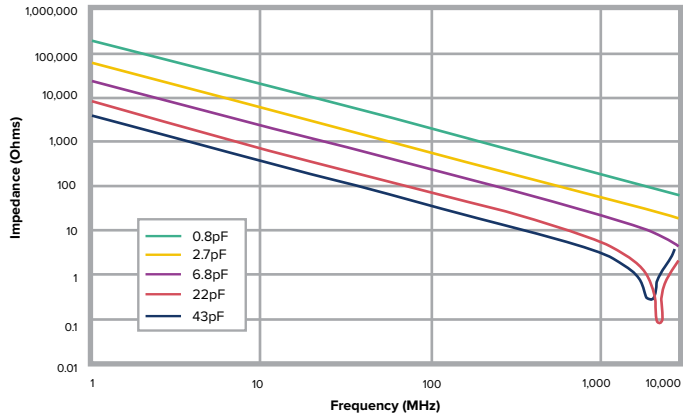


## TYPICAL PERFORMANCE — 0805 CHIP SIZE


0805 H SERIES IMPEDANCE vs. FREQUENCY

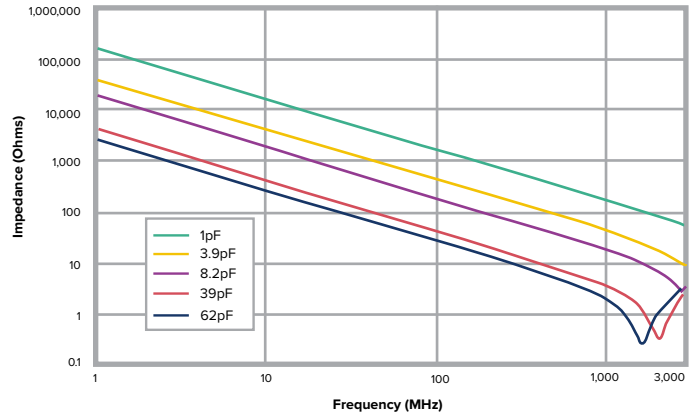


0603 H SERIES ESR vs. FREQUENCY

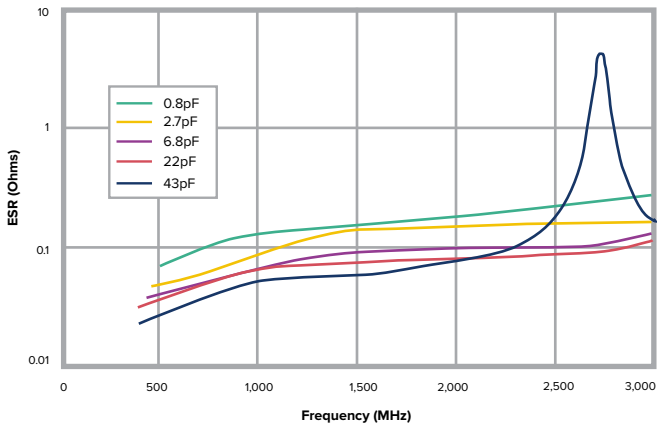


0805 H SERIES ESR vs. FREQUENCY

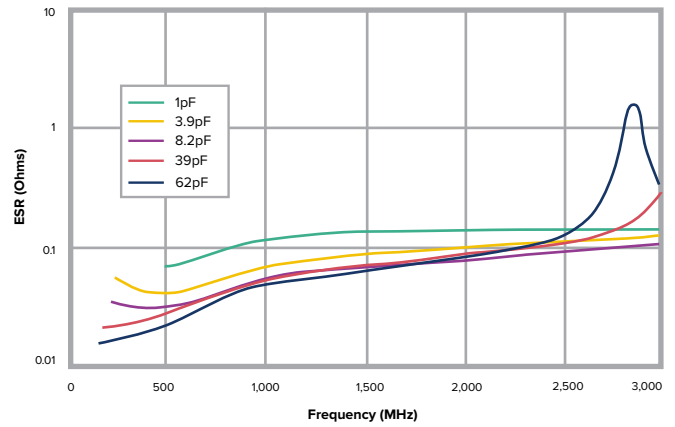

0603 H SERIES Q vs. FREQUENCY

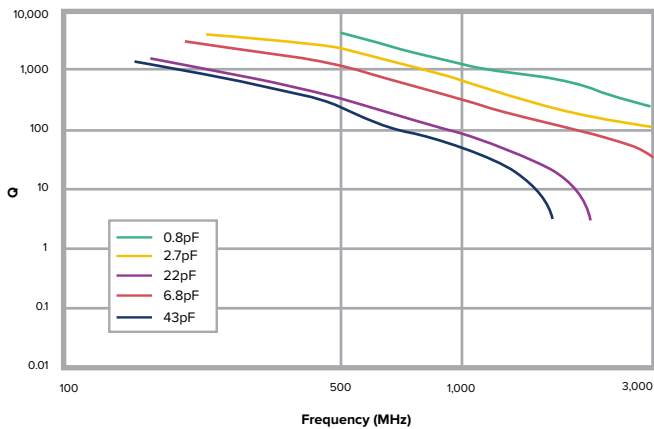

0805 H SERIES Q vs. FREQUENCY

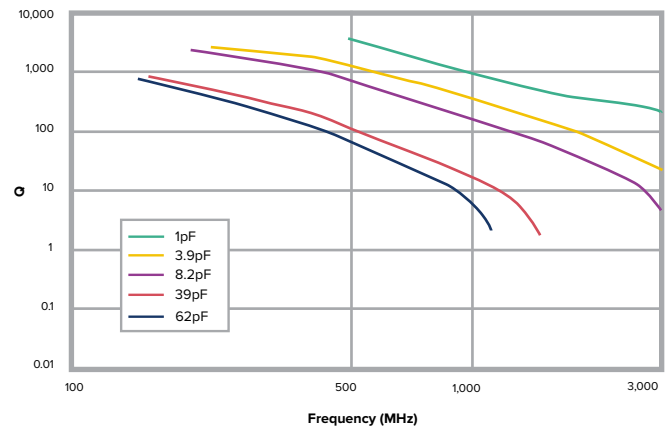

# High Q Capacitors, High Power RF — Surface Mount and Ribbon Leaded

A range of ultra-low loss High Q ceramic capacitors with COG/NPO characteristics suitable for high power applications where minimal power loss and very low self heating is demanded.

**Capacitance Values**  
1pF to 27nF (High Q)

**Chip Sizes**  
2225 and 4040


**Operating Temperature**  
-55°C to +125°C

**High Q Low ESR Dielectrics**  
(other options available)

**Insulation Resistance (IR)**

100GΩ min @ 100 Vdc or 1000s  
(whichever is the less)

**DWV up to 8400Vdc**

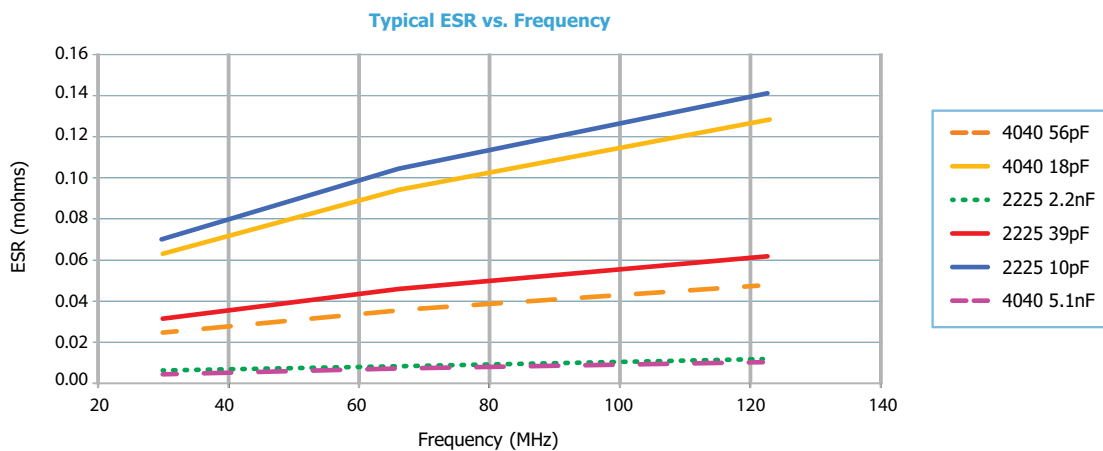

## ESR Measurement

All ESR figures are measured using a VNA and 2m copper resonant tube and extrapolating to 30MHz by ratio. Measured data can be supplied on request. Measurement of ESR can vary with test method and components should only be compared when tested back to back on the same equipment under controlled conditions.

## HIGH POWER RF CAPACITORS — MINIMUM/MAXIMUM CAPACITANCE VALUES


| Chip size   | Case size 25 - 2225 |             | Case size 40 - 4040 |              |
|-------------|---------------------|-------------|---------------------|--------------|
|             | Min.                | Max.        | Min.                | Max.         |
| 200V        | 6.2nF               | 10nF        | 16nF                | 27nF         |
| 500V        | 5.1nF               | 5.6nF       | 13nF                | 15nF         |
| 630V        | 3.6nF               | 4.7nF       | 11nF                | 12nF         |
| 1kV         | 1.1nF               | 3.3nF       | 5.6nF               | 10nF         |
| 2kV         | 510pF               | 1.0nF       | 1.6nF               | 5.1nF        |
| 3kV         | 110pF               | 470pF       | 910pF               | 1.5nF        |
| 3.6kV       | 1pF                 | 47pF*/100pF | -                   | -            |
| 4kV         | -                   | -           | 620pF               | 820pF        |
| 5kV         | -                   | -           | 360pF               | 560pF        |
| 6kV         | -                   | -           | 160pF               | 330pF        |
| 7.0kV/7.2kV | -                   | -           | 1pF                 | 56pF**/150pF |

Note: \*2225 - 47pF max. for dual rated @2.5kVac 30MHz. \*\*4040 - 56pF max. for dual rated @5kVac 30MHz.




# High Q Capacitors, High Power RF — Surface Mount and Ribbon Leded

## Surface Mount



Plating finish:  
Tin over Ni.

## Ribbon Leded Silver plated copper ribbon attached with HMP solder - (MP greater than 260°C)

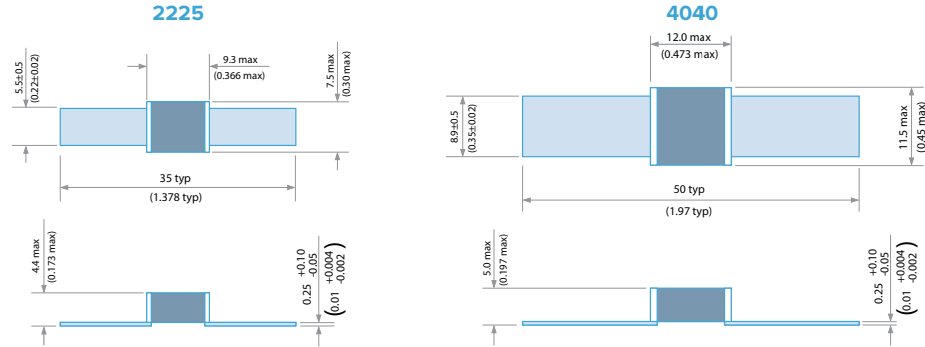

## RANGE DIMENSIONS — SURFACE MOUNT HIGH POWER RF CAPACITORS

| Chip Size | Length (L1) mm/inches       | Width (W) mm/inches         | Max. Thickness (T) mm/inches | Termination Band L2 mm/inches |             |
|-----------|-----------------------------|-----------------------------|------------------------------|-------------------------------|-------------|
|           |                             |                             |                              | min                           | max         |
| 2225      | 5.7 ± 0.04<br>0.225 ± 0.016 | 6.3 ± 0.4<br>0.25 ± 0.016   | 4.2<br>0.16                  | 0.25<br>0.01                  | 1.0<br>0.04 |
| 4040      | 10.2 ± 0.5<br>0.402 ± 0.020 | 10.2 ± 0.5<br>0.402 ± 0.020 | 4.2<br>0.16                  | 0.5<br>0.02                   | 1.5<br>0.06 |

## ORDERING INFORMATION — SURFACE MOUNT HIGH POWER RF CAPACITORS

| 4040         | J   | 7K0  | 0470  | J   | Q                             | B               | AF7  |
|--------------|---|--|---|---|-------------------------------|-----------------|--|
| Chip Size    | Termination   | Voltage  | Capacitance in Picofarads (pF)  | Capacitance Tolerance   | Dielectric                    | Packing         | Variant Code                                       |
| 2225<br>4040 | J = Nickel barrier (100% matte tin plating).<br>RoHS compliant.<br>Lead free. | 200 = 200V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>2K0 = 2kV<br>3K0 = 3kV<br>3K6 = 3.6kV<br>4K0 = 4kV<br>5K0 = 5kV<br>6K0 = 6kV<br>7K0 = 7kV/<br>7.2kV | <10pF Insert a P for the decimal point, e.g., <b>2P20</b> = 2.2pF.<br>>10pF. 1st digit is 0.<br>2nd and 3rd digits are significant figures of capacitance code. The 4th digit is number of zeros following e.g., <b>0470</b> = 47pF<br><b>0512</b> = 5100pF | <10pF<br>B = ±0.10pF<br>C = ±0.25pF<br>D = ±0.50pF<br>≥10pF<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20% | Q = High Q version of COG/NPO | B = Bulk packed | AF7 = Standard Variant for High Power applications |

## ORDERING INFORMATION — RIBBON LEADED HIGH POWER RF CAPACITORS

| 4040         | B   | 7K0  | 0470  | G   | Q                             | B               | Lead options     | Variant code                             |
|--------------|---|--|---|---|-------------------------------|-----------------|------------------|--|
| Chip Size    | Coating   | Voltage  | Capacitance in Picofarads (pF)  | Capacitance Tolerance   | Dielectric                    | Packing         | R                | W001                                     |
| 2225<br>4040 | B = Uncoated<br>V = Coated with modified silicone lacquer | 200 = 200V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>2K0 = 2kV<br>3K0 = 3kV<br>3K6 = 3.6kV<br>4K0 = 4kV<br>5K0 = 5kV<br>6K0 = 6kV<br>7K0 = 7kV/<br>7.2kV | <10pF Insert a P for the decimal point, e.g., <b>2P20</b> = 2.2pF.<br>>10pF. 1st digit is 0.<br>2nd and 3rd digits are significant figures of capacitance code. The 4th digit is number of zeros following e.g., <b>0470</b> = 47pF<br><b>0512</b> = 5100pF | <10pF<br>B = ±0.10pF<br>C = ±0.25pF<br>D = ±0.50pF<br>≥10pF<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20% | Q = High Q version of COG/NPO | B = Bulk packed | R = Ribbon Leded | W001 = Standard Variant<br>W**1 = Marked |

Note: For non-magnetic, see page 73.



# High Q Porcelain Capacitors — CF Series

## DESCRIPTION

- High Q Porcelain Capacitors
- SMD Compatibility
- Ultra Temperature Stable
- Low ESR, High Q
- Capacitance Range 0.1-5100 pF
- Operating Range -55° to +125°C
- High Voltage
- High Self-Resonance
- Low Noise
- Established Reliability

## FUNCTIONAL APPLICATIONS

- Impedance Matching
- Power Handling
- DC Blocking
- Bypass
- Coupling
- Tuning and Feedback
- Amplifier Matching Networks
- VCO Frequency Stabilization
- Filtering, Diplexers and Antenna Matching
- High RF Power Circuits
- Oscillators
- Timing Circuits
- Filters
- RF Power Amplifiers and Delay Lines

## DIELECTRIC CHARACTERISTICS

| Dielectric Material (Code)            |                        | COG/NP0 (CF)           |
|---------------------------------------|------------------------|------------------------|
| Temperature Coefficient (ppm/°C)      |                        | 0 ± 15                 |
| Dissipation Factor (% @ 1MHz Maximum) |                        | 0.05                   |
| Dielectric Withstanding Voltage       | Voltage Rating (Volts) | Refer to table         |
|                                       | DWV (Volts)            | 250% of rated          |
| Insulation Resistance (MΩ Minimum)    | @ +25°C                | 10 <sup>6</sup> MΩ min |
|                                       | @ +125°C               | 10 <sup>5</sup> MΩ min |
| Aging                                 |                        | None                   |
| Piezoelectric Effects                 |                        | None                   |
| Dielectric Absorption                 |                        | None                   |

## CAPACITANCE AND VOLTAGE TABLE


| Cap Code | Cap (PF) | Case Size |          |          |          |          |          |
|----------|----------|-----------|----------|----------|----------|----------|----------|
|          |          | C06 0603  | C11 0505 | C17 1111 | C18 1111 | C22 2225 | C40 3838 |
| 0R1      | 0.1      |           |          |          |          |          |          |
| 0R2      | 0.2      |           |          |          |          |          |          |
| 0R3      | 0.3      |           |          |          |          |          |          |
| 0R4      | 0.4      |           |          |          |          |          |          |
| 0R5      | 0.5      |           |          |          |          |          |          |
| 0R6      | 0.6      |           |          |          |          |          |          |
| 0R7      | 0.7      |           |          |          |          |          |          |
| 0R8      | 0.8      |           |          |          |          |          |          |
| 0R9      | 0.9      |           |          |          |          |          |          |
| 1R0      | 1.0      |           |          |          |          |          |          |
| 1R1      | 1.1      |           |          |          |          |          |          |
| 1R3      | 1.3      |           |          |          |          |          |          |
| 1R4      | 1.4      |           |          |          |          |          |          |
| 1R5      | 1.5      |           |          |          |          |          |          |
| 1R6      | 1.6      |           |          |          |          |          |          |
| 1R7      | 1.7      |           |          |          |          |          |          |
| 1R8      | 1.8      |           |          |          |          |          |          |
| 1R9      | 1.9      |           |          |          |          |          |          |
| 2R0      | 2.0      |           |          |          |          |          |          |
| 2R1      | 2.1      |           |          |          |          |          |          |
| 2R2      | 2.2      |           |          |          |          |          |          |
| 2R4      | 2.4      |           |          |          |          |          |          |
| 2R7      | 2.7      |           |          |          |          |          |          |
| 3R0      | 3.0      |           |          |          |          |          |          |
| 3R3      | 3.3      |           |          |          |          |          |          |
| 3R6      | 3.6      |           |          |          |          |          |          |
| 3R9      | 3.9      |           |          |          |          |          |          |
| 4R3      | 4.3      |           |          |          |          |          |          |
| 4R7      | 4.7      |           |          |          |          |          |          |
| 5R1      | 5.1      |           |          |          |          |          |          |
| 5R6      | 5.6      |           |          |          |          |          |          |
| 6R2      | 6.2      |           |          |          |          |          |          |
| 6R8      | 6.8      |           |          |          |          |          |          |
| 7R5      | 7.5      |           |          |          |          |          |          |
| 8R2      | 8.2      |           |          |          |          |          |          |
| 9R1      | 9.1      |           |          |          |          |          |          |
| 100      | 10       |           |          |          |          |          |          |
| 110      | 11       |           |          |          |          |          |          |
| 120      | 12       |           |          |          |          |          |          |
| 130      | 13       |           |          |          |          |          |          |
| 150      | 15       |           |          |          |          |          |          |
| 160      | 16       |           |          |          |          |          |          |
| 180      | 18       |           |          |          |          |          |          |
| 200      | 20       |           |          |          |          |          |          |
| 220      | 22       |           |          |          |          |          |          |
| 240      | 24       |           |          |          |          |          |          |
| 270      | 27       |           |          |          |          |          |          |
| 300      | 30       |           |          |          |          |          |          |
| 330      | 33       |           |          |          |          |          |          |
| 360      | 36       |           |          |          |          |          |          |
| 390      | 39       |           |          |          |          |          |          |
| 430      | 43       |           |          |          |          |          |          |
| 470      | 47       |           |          |          |          |          |          |
| 510      | 51       |           |          |          |          |          |          |
| 560      | 56       |           |          |          |          |          |          |
| 620      | 62       |           |          |          |          |          |          |
| 680      | 68       |           |          |          |          |          |          |
| 750      | 75       |           |          |          |          |          |          |
| 820      | 82       |           |          |          |          |          |          |
| 910      | 91       |           |          |          |          |          |          |
| 101      | 100      |           |          |          |          |          |          |
| 111      | 110      |           |          |          |          |          |          |
| 121      | 120      |           |          |          |          |          |          |
| 131      | 130      |           |          |          |          |          |          |
| 151      | 150      |           |          |          |          |          |          |
| 161      | 160      |           |          |          |          |          |          |
| 181      | 180      |           |          |          |          |          |          |
| 201      | 200      |           |          |          |          |          |          |
| 221      | 220      |           |          |          |          |          |          |
| 241      | 240      |           |          |          |          |          |          |
| 271      | 270      |           |          |          |          |          |          |
| 301      | 300      |           |          |          |          |          |          |
| 331      | 330      |           |          |          |          |          |          |
| 361      | 360      |           |          |          |          |          |          |
| 391      | 390      |           |          |          |          |          |          |
| 431      | 430      |           |          |          |          |          |          |
| 471      | 470      |           |          |          |          |          |          |
| 511      | 510      |           |          |          |          |          |          |
| 561      | 560      |           |          |          |          |          |          |
| 621      | 620      |           |          |          |          |          |          |
| 681      | 680      |           |          |          |          |          |          |
| 751      | 750      |           |          |          |          |          |          |
| 821      | 820      |           |          |          |          |          |          |
| 911      | 910      |           |          |          |          |          |          |
| 102      | 1000     |           |          |          |          |          |          |
| 122      | 1200     |           |          |          |          |          |          |
| 152      | 1500     |           |          |          |          |          |          |
| 182      | 1800     |           |          |          |          |          |          |
| 222      | 2200     |           |          |          |          |          |          |
| 272      | 2700     |           |          |          |          |          |          |
| 332      | 3300     |           |          |          |          |          |          |
| 392      | 3900     |           |          |          |          |          |          |
| 472      | 4700     |           |          |          |          |          |          |
| 512      | 5100     |           |          |          |          |          |          |
| Reel QTY |          | 4000      | 3500     | 2350     | 2350     | 500      | 250      |

Special capacitance values available upon request.




# High Q Porcelain Capacitors — CF Series


**ESR vs. Frequency**  
**DLI C06 CF Series**

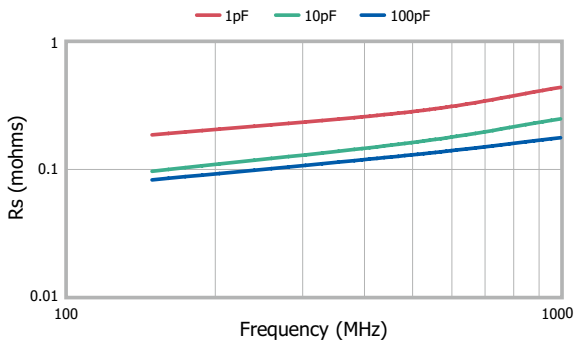


**Q vs. Capacitance**  
**DLI C06 CF Series**

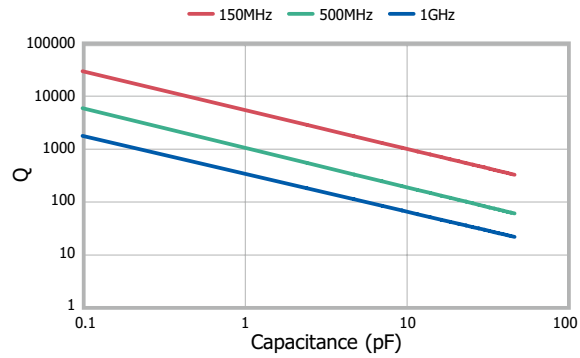


**ESR vs. Frequency**  
**DLI C11 CF Series**

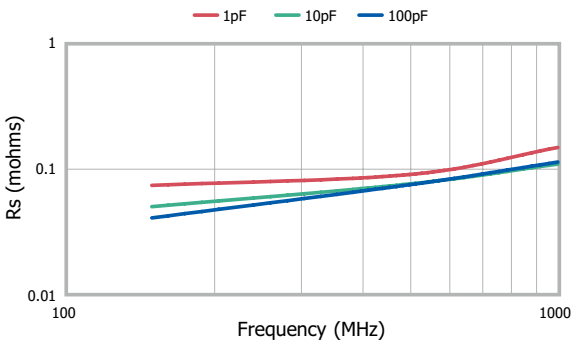


**Q vs. Capacitance**  
**DLI C11 CF Series**

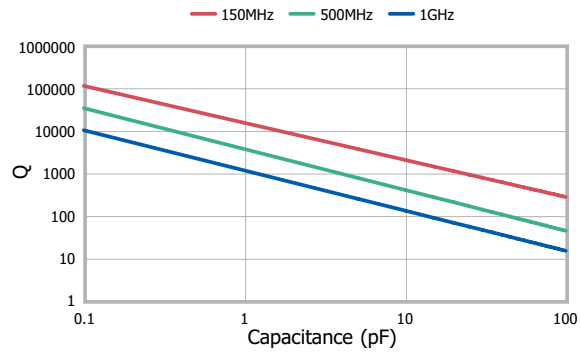


**ESR vs. Frequency**  
**DLI C17 CF Series**

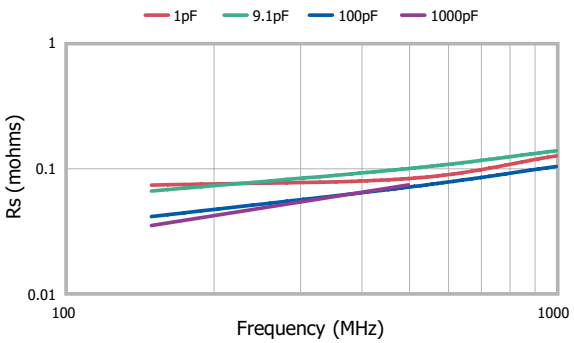


**Q vs. Capacitance**  
**DLI C17 CF Series**

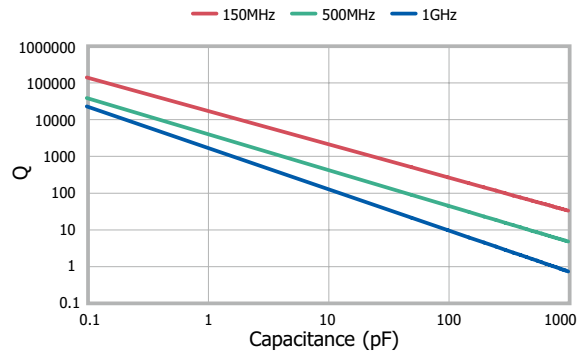

**ESR vs. Frequency**  
**DLI C18 CF Series**

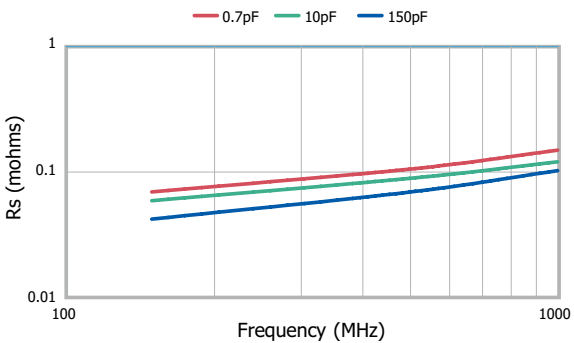







**Q vs. Capacitance**  
**DLI C18 CF Series**

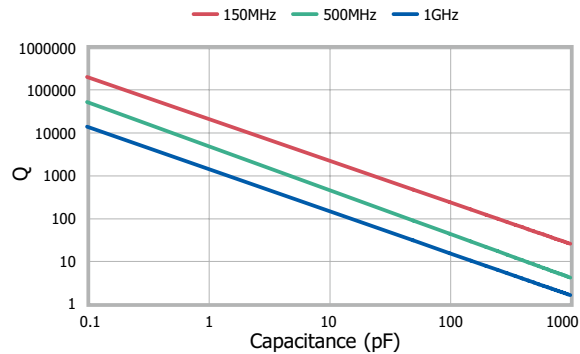

Note: This information represents typical device performance.



# High Q Porcelain Capacitors — CF Series

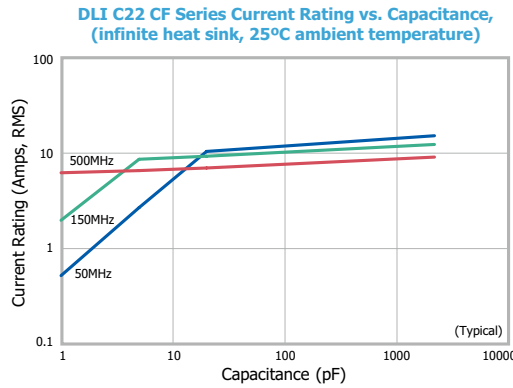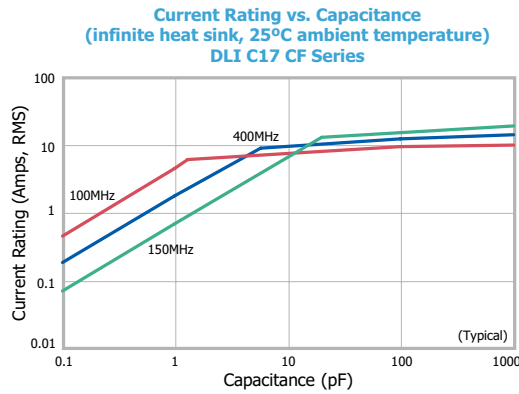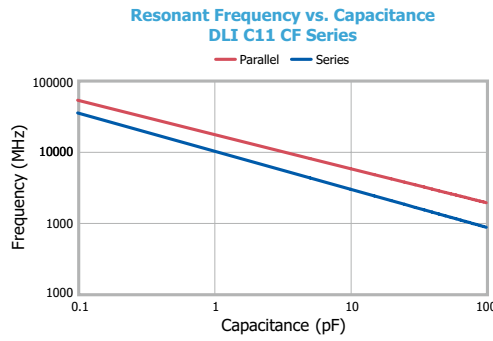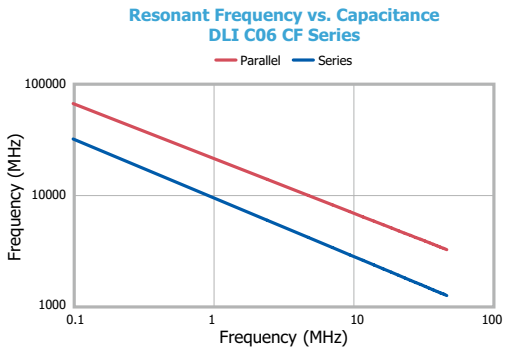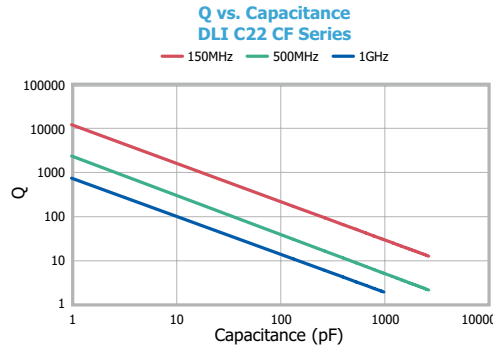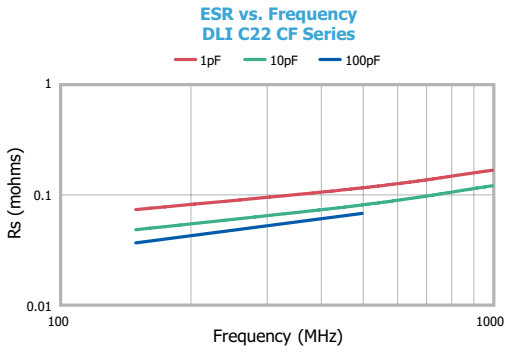

Note: This information represents typical device performance.

## ORDERING INFORMATION — CF SERIES — See page 24 for complete part number system.

| Chip size  | Dielectric                        | Capacitance Code (pF)  | Capacitance tolerance   | Voltage Code   | Termination   | Lead Type  | Test Level  | Marking   | Packaging  |
|--|-----------------------------------|--|---|--|---|--|---|---|--|
| <b>C06</b><br><b>C11</b><br><b>C17</b><br><b>C18</b><br><b>C22</b><br><b>C40</b> | <b>CF</b> = COG/<br>NPO High<br>Q | 1 <sup>st</sup> two digits<br>are significant<br>figures of<br>capacitance,<br>3 <sup>rd</sup> digit denotes<br>number of zeros,<br>R = decimal<br>point.<br><br>Examples:<br><b>1R0</b> = 1.0pF<br><b>471</b> = 471pF | <b>&lt;10pF</b><br><b>A</b> = ±0.05pF<br><b>B</b> = ±0.1pF<br><b>C</b> = ±0.25pF<br><b>D</b> = ±0.5pF<br><b>≥10pF</b><br><b>A</b> = ±1%<br><b>G</b> = ±2%<br><b>J</b> = ±5%<br><b>K</b> = ±10%<br><b>M</b> = ±20%<br><b>X</b> = GMV<br><b>S</b> = Special | <b>5</b> = 50V<br><b>1</b> = 100V<br><b>6</b> = 200V<br><b>9</b> = 250V<br><b>4</b> = 500V<br><b>7</b> = 1kV<br><b>A</b> = 1.5kV<br><b>G</b> = 2kV<br><b>B</b> = 2.5kV<br><b>D</b> = 3.6kV<br><b>H</b> = 7.2kV | <b>C06</b><br>U, S, Z, E, P, Q, Y, W, H, V, R<br><b>C11/17</b><br>T, U, S, Z, E, P, Q, Y, W, H,<br>V, R<br><b>C18</b><br>U, Q, Y, V, W, H, Z<br><b>C22</b><br>U, S, Z, E, P, Q, Y, W, H, V, R<br><b>C40</b><br>T, U, S, P, Q, Y, W, H, V, R | <b>A</b> = Axial ribbon<br><b>B</b> = Radial ribbon<br><b>C</b> = Center<br>ribbon<br><b>D</b> = Special<br><b>E</b> = Axial wire<br><b>F</b> = Radial wire<br><b>N</b> = Chip<br><br>Note: C06 only<br>available as N<br>(Chip) | <b>X</b> = Standard<br><b>Y</b> = Reduced<br>Visual<br><br><b>A</b> = MIL-<br>PRF-55681<br>Group A<br><b>C</b> = MIL-<br>PRF-55681<br>Group C<br><b>D</b> = Customer<br>Specified | <b>C06</b><br>0, 1, 2, 5<br><b>C11</b><br>0<br><b>C17</b><br>0, 1, 2, 5<br><b>C18/22/40</b><br>0, 1 | <b>C06</b><br>T, W, B, S<br><b>C11/17/18</b><br>T, V, W, B,<br>P, S<br><b>C22</b><br>T, B, P, S<br><b>C40</b><br>T, B, P, S, R |





# High Q Porcelain Capacitors — AH Series

## DESCRIPTION

- High Q Porcelain Capacitors
- SMD Compatibility
- Positive TC “P90”
- Low ESR, High Q
- Capacitance Range 0.1-5100 pF
- Operating Range -55° to +125°C
- High Voltage
- High Self-Resonance
- Low Noise
- Established Reliability

## FUNCTIONAL APPLICATIONS

- Impedance Matching
- Power Handling
- DC Blocking
- Bypass
- Coupling
- Tuning and Feedback
- Amplifier Matching Networks
- VCO Frequency Stabilization
- Filtering, Diplexers and Antenna Matching
- High RF Power Circuits
- Oscillators
- Timing Circuits
- Filters
- RF Power Amplifiers and Delay Lines

## DIELECTRIC CHARACTERISTICS

| Dielectric Material (Code)            |                        | P90 (AH)               |
|---------------------------------------|------------------------|------------------------|
| Temperature Coefficient (ppm/°C)      |                        | +90 ± 20               |
| Dissipation Factor (% @ 1MHz Maximum) |                        | 0.05                   |
| Dielectric Withstanding Voltage       | Voltage Rating (Volts) | Refer to table         |
|                                       | DWV (Volts)            | 250% of rated          |
| Insulation Resistance (MΩ Minimum)    | @ +25°C                | 10 <sup>6</sup> MΩ min |
|                                       | @ +125°C               | 10 <sup>5</sup> MΩ min |
| Aging                                 |                        | None                   |
| Piezoelectric Effects                 |                        | None                   |
| Dielectric Absorption                 |                        | None                   |









## CAPACITANCE AND VOLTAGE TABLE

| Cap Code            | Cap (PF) | C11 0505    | C17 1111   | Case Size  |              | C40 3838     |
|---------------------|----------|-------------|------------|------------|--------------|--------------|
|                     |          |             |            | C18 1111   | C22 2225     |              |
| 0R1                 | 0.1      | 280V Code 9 | 4kV Code 7 | 2kV Code 6 | 2.8kV Code B | 7.2kV Code H |
| 0R2                 | 0.2      |             |            |            |              |              |
| 0R3                 | 0.3      |             |            |            |              |              |
| 0R4                 | 0.4      |             |            |            |              |              |
| 0R5                 | 0.5      |             |            |            |              |              |
| 0R6                 | 0.6      |             |            |            |              |              |
| 0R7                 | 0.7      |             |            |            |              |              |
| 0R8                 | 0.8      |             |            |            |              |              |
| 0R9                 | 0.9      |             |            |            |              |              |
| 1R0                 | 1.0      |             |            |            |              |              |
| 1R1                 | 1.1      |             |            |            |              |              |
| 1R3                 | 1.3      |             |            |            |              |              |
| 1R4                 | 1.4      |             |            |            |              |              |
| 1R5                 | 1.5      |             |            |            |              |              |
| 1R6                 | 1.6      |             |            |            |              |              |
| 1R7                 | 1.7      |             |            |            |              |              |
| 1R8                 | 1.8      |             |            |            |              |              |
| 1R9                 | 1.9      |             |            |            |              |              |
| 2R0                 | 2.0      |             |            |            |              |              |
| 2R1                 | 2.1      |             |            |            |              |              |
| 2R2                 | 2.2      |             |            |            |              |              |
| 2R4                 | 2.4      |             |            |            |              |              |
| 2R7                 | 2.7      |             |            |            |              |              |
| 3R0                 | 3.0      |             |            |            |              |              |
| 3R3                 | 3.3      |             |            |            |              |              |
| 3R6                 | 3.6      |             |            |            |              |              |
| 3R9                 | 3.9      |             |            |            |              |              |
| 4R3                 | 4.3      |             |            |            |              |              |
| 4R7                 | 4.7      |             |            |            |              |              |
| 5R1                 | 5.1      |             |            |            |              |              |
| 5R6                 | 5.6      |             |            |            |              |              |
| 6R2                 | 6.2      |             |            |            |              |              |
| 6R8                 | 6.8      |             |            |            |              |              |
| 7R5                 | 7.5      |             |            |            |              |              |
| 8R2                 | 8.2      |             |            |            |              |              |
| 9R1                 | 9.1      |             |            |            |              |              |
| 100                 | 10       |             |            |            |              |              |
| 110                 | 11       |             |            |            |              |              |
| 120                 | 12       |             |            |            |              |              |
| 130                 | 13       |             |            |            |              |              |
| 150                 | 15       |             |            |            |              |              |
| 160                 | 16       |             |            |            |              |              |
| 180                 | 18       |             |            |            |              |              |
| 200                 | 20       |             |            |            |              |              |
| 220                 | 22       |             |            |            |              |              |
| 240                 | 24       |             |            |            |              |              |
| 270                 | 27       |             |            |            |              |              |
| 300                 | 30       |             |            |            |              |              |
| 330                 | 33       |             |            |            |              |              |
| 360                 | 36       |             |            |            |              |              |
| 390                 | 39       |             |            |            |              |              |
| 430                 | 43       |             |            |            |              |              |
| 470                 | 47       |             |            |            |              |              |
| 510                 | 51       |             |            |            |              |              |
| 560                 | 56       |             |            |            |              |              |
| 620                 | 62       |             |            |            |              |              |
| 680                 | 68       |             |            |            |              |              |
| 750                 | 75       |             |            |            |              |              |
| 820                 | 82       |             |            |            |              |              |
| 910                 | 91       |             |            |            |              |              |
| 101                 | 100      |             |            |            |              |              |
| 111                 | 110      |             |            |            |              |              |
| 121                 | 120      |             |            |            |              |              |
| 131                 | 130      |             |            |            |              |              |
| 151                 | 150      |             |            |            |              |              |
| 161                 | 160      |             |            |            |              |              |
| 181                 | 180      |             |            |            |              |              |
| 201                 | 200      |             |            |            |              |              |
| 221                 | 220      |             |            |            |              |              |
| 241                 | 240      |             |            |            |              |              |
| 271                 | 270      |             |            |            |              |              |
| 301                 | 300      |             |            |            |              |              |
| 331                 | 330      |             |            |            |              |              |
| 361                 | 360      |             |            |            |              |              |
| 391                 | 390      |             |            |            |              |              |
| 431                 | 430      |             |            |            |              |              |
| 471                 | 470      |             |            |            |              |              |
| 511                 | 510      |             |            |            |              |              |
| 561                 | 560      |             |            |            |              |              |
| 621                 | 620      |             |            |            |              |              |
| 681                 | 680      |             |            |            |              |              |
| 751                 | 750      |             |            |            |              |              |
| 821                 | 820      |             |            |            |              |              |
| 911                 | 910      |             |            |            |              |              |
| 102                 | 1000     |             |            |            |              |              |
| 122                 | 1200     |             |            |            |              |              |
| 152                 | 1500     |             |            |            |              |              |
| 182                 | 1800     |             |            |            |              |              |
| 222                 | 2200     |             |            |            |              |              |
| 272                 | 2700     |             |            |            |              |              |
| 332                 | 3300     |             |            |            |              |              |
| 392                 | 3900     |             |            |            |              |              |
| 472                 | 4700     |             |            |            |              |              |
| 512                 | 5100     |             |            |            |              |              |
| Reel QTY Horizontal |          | 3500        | 2350       | 2350       | 500          | 250          |

Special capacitance values available upon request.








# High Q Porcelain Capacitors — AH Series

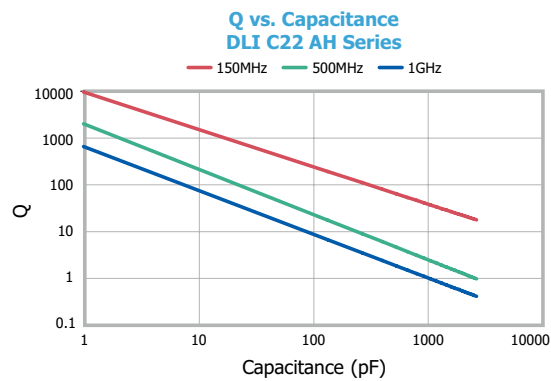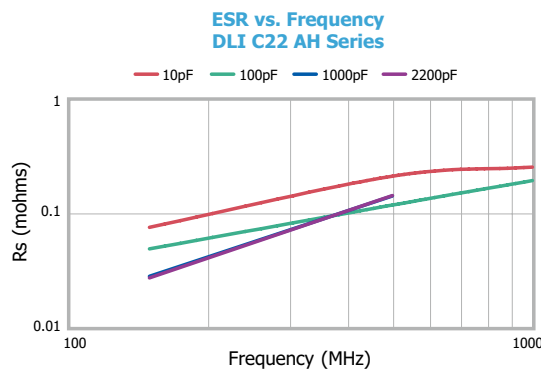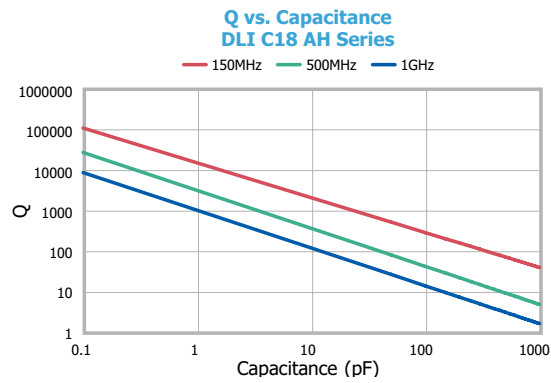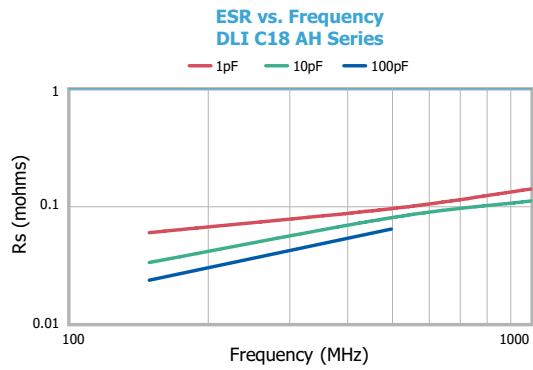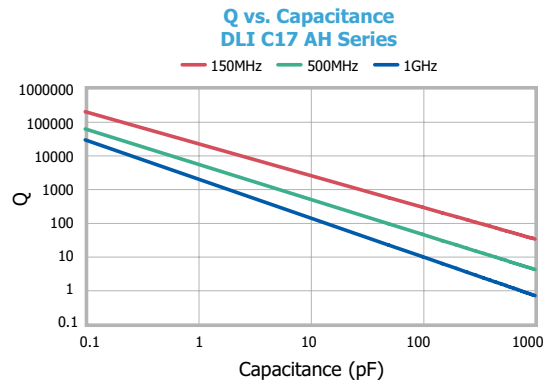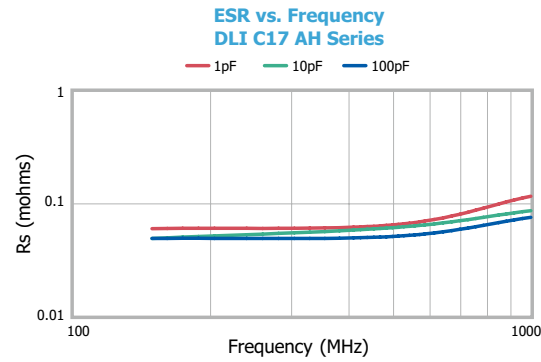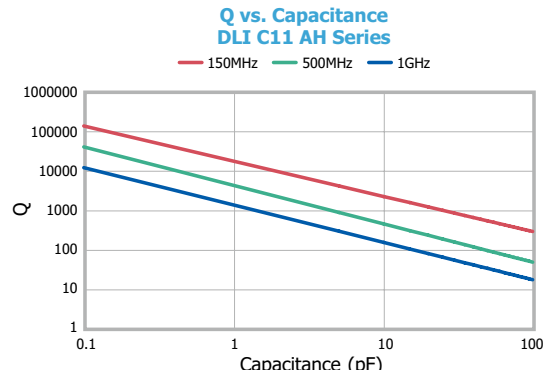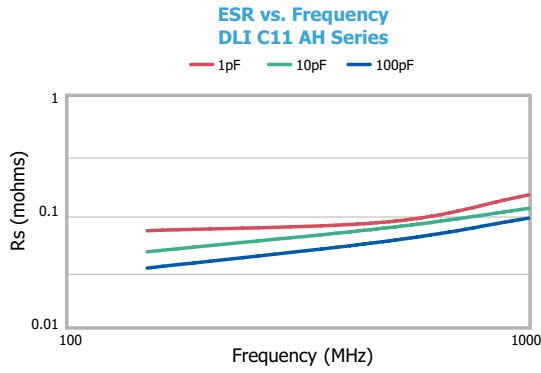

Note: This information represents typical device performance.



# High Q Porcelain Capacitors — AH Series

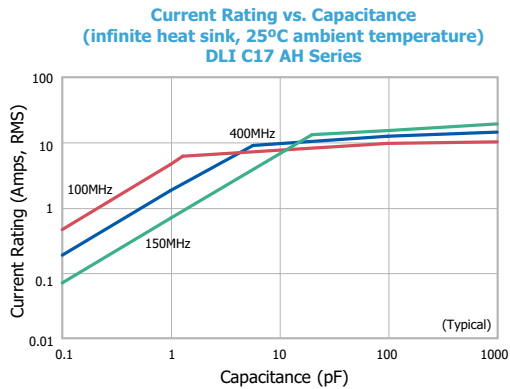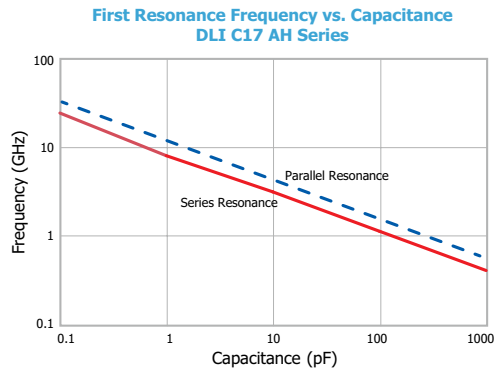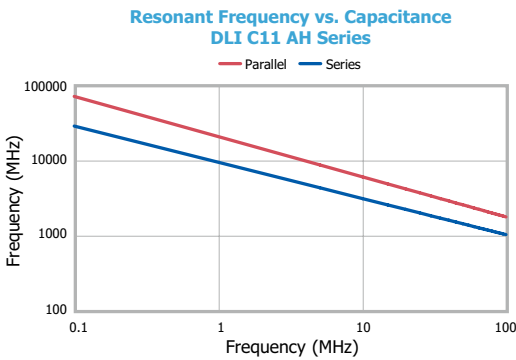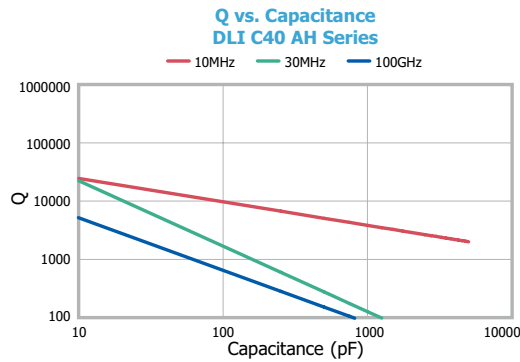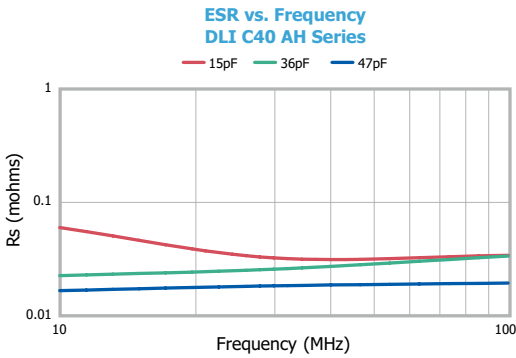

Note: This information represents typical device performance.

## ORDERING INFORMATION — AH SERIES — See page 24 for complete part number system.

| C17                             | AH                 | 620   | J   | -   | 7   | U  | A  | -   | X   | 0 | T |
|---------------------------------|--------------------|---|---|---|---|--|--|---|---|---|---|
| Chip size                       | Dielectric         | Capacitance Code (pF)   | Capacitance tolerance   | Voltage Code  | Termination   | Lead Type  | Test Level   | Marking   | Packaging   |   |   |
| C11<br>C17<br>C18<br>C22<br>C40 | AH = P90<br>High Q | 1 <sup>st</sup> two digits are significant figures of capacitance, 3 <sup>rd</sup> digit denotes number of zeros, R = decimal point.<br><br>Examples:<br>1R0 = 1.0pF<br>471 = 471pF | <10pF<br>A = ±0.05pF<br>B = ±0.1pF<br>C = ±0.25pF<br>D = ±0.5pF<br><br>≥10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20%<br>X = GMV<br>S = Special | 5 = 50V<br>1 = 100V<br>6 = 200V<br>9 = 250V<br>4 = 500V<br>7 = 1kV<br>A = 1.5kV<br>G = 2kV<br>B = 2.5kV<br>D = 3.6kV<br>H = 7.2kV | <b>C11/17</b><br>T, U, S, Z, E, P, Q, Y, M, W, H, V, R<br><br><b>C18</b><br>U, Z, E, Y, W, H<br><br><b>C22</b><br>U, S, Z, E, P, Q, Y, M, W, H, V, R<br><br><b>C40</b><br>T, U, S, Z, E, P, Q, Y, M, W, H, V, R | A = Axial ribbon<br>B = Radial ribbon<br>C = Center ribbon<br>D = Special<br>E = Axial wire<br>F = Radial wire<br>N = Chip<br><br>Note: C11 only available with A, B, D or N options | X = Standard<br>Y = Reduced Visual<br><br>A = MIL-PRF-55681 Group A<br>C = MIL-PRF-55681 Group C<br>D = Customer Specified | <b>C11</b><br>0, 1, 2, 5<br><br><b>C17</b><br>0, 1, 2, 3, 4, 5<br><br><b>C18</b><br>0, 1, 2, 5<br><br><b>C22/40</b><br>0, 1 | <b>C11/17/18</b><br>T, V, W, B, P, S<br><br><b>C22</b><br>T, B, P, S<br><br><b>C40</b><br>T, B, P, S, R |   |   |



# UL Series — Ultra Low ESR Ceramic Capacitors

## DESCRIPTION

- Ceramic Capacitors
- SMD Compatibility
- Stable TC NP0
- Low ESR, High Q
- Capacitance Range 0.2 - 2200 pF
- Operating Range -55° to +125°C
- High Voltage
- Low Noise
- EIA 0603 & 0805 Case Size

## FUNCTIONAL APPLICATIONS

- DC Blocking
- Bypass
- Coupling
- Tuning & Feedback
- Amplifier Matching Networks
- VCO Frequency Stabilization
- Filtering, Dplexers & Antenna Matching
- High RF Power Circuits
- Oscillators
- Timing Circuits
- Filters
- Broadcast Power Amps
- RF Power Amplifiers & Delay Lines

## DIELECTRIC CHARACTERISTICS

| Dielectric Material (Code)            |                        | UL             |
|---------------------------------------|------------------------|----------------|
| Temperature Coefficient (ppm/°C)      |                        | 0 ± 30         |
| Dissipation Factor (% @ 1MHz Maximum) |                        | 0.05*          |
| Dielectric Withstanding Voltage       | Voltage Rating (Volts) | Refer to table |
|                                       | DWV (Volts)            | 250% of rated  |
| Insulation Resistance (MΩ Minimum)    | @ +25°C                | **             |
|                                       | @ +125°C               | **             |
| Aging                                 |                        | None           |
| Piezoelectric Effect                  |                        | None           |
| Dielectric Absorption                 |                        | None           |

\* Does not apply <2 pF

\*\* Refer to table and statement provided







## CAPACITANCE AND VOLTAGE TABLE

| Cap Code   | Cap (pF) | Case Size |          |          |          |          |          |
|------------|----------|-----------|----------|----------|----------|----------|----------|
|            |          | C04 0402  | C06 0603 | C07 0711 | C08 0805 | C11 0505 | C17 1111 |
| OR1        | 0.1      |           |          |          |          |          |          |
| OR2        | 0.2      |           |          |          |          |          |          |
| OR3        | 0.3      |           |          |          |          |          |          |
| OR4        | 0.4      |           |          |          |          |          |          |
| OR5        | 0.5      |           |          |          |          |          |          |
| OR6        | 0.6      |           |          |          |          |          |          |
| OR7        | 0.7      |           |          |          |          |          |          |
| OR8        | 0.8      |           |          |          |          |          |          |
| OR9        | 0.9      |           |          |          |          |          |          |
| 1R0        | 1.0      |           |          |          |          |          |          |
| 1R1        | 1.1      |           |          |          |          |          |          |
| 1R3        | 1.3      |           |          |          |          |          |          |
| 1R4        | 1.4      |           |          |          |          |          |          |
| 1R5        | 1.5      |           |          |          |          |          |          |
| 1R6        | 1.6      |           |          |          |          |          |          |
| 1R7        | 1.7      |           |          |          |          |          |          |
| 1R8        | 1.8      |           |          |          |          |          |          |
| 1R9        | 1.9      |           |          |          |          |          |          |
| 2R0        | 2.0      |           |          |          |          |          |          |
| 2R1        | 2.1      |           |          |          |          |          |          |
| 2R2        | 2.2      |           |          |          |          |          |          |
| 2R4        | 2.4      |           |          |          |          |          |          |
| 2R7        | 2.7      |           |          |          |          |          |          |
| 3R0        | 3.0      |           |          |          |          |          |          |
| 3R3        | 3.3      |           |          |          |          |          |          |
| 3R6        | 3.6      |           |          |          |          |          |          |
| 3R9        | 3.9      |           |          |          |          |          |          |
| 4R3        | 4.3      |           |          |          |          |          |          |
| 4R7        | 4.7      |           |          |          |          |          |          |
| 5R1        | 5.1      |           |          |          |          |          |          |
| 5R6        | 5.6      |           |          |          |          |          |          |
| 6R2        | 6.2      |           |          |          |          |          |          |
| 6R8        | 6.8      |           |          |          |          |          |          |
| 7R5        | 7.5      |           |          |          |          |          |          |
| 8R2        | 8.2      |           |          |          |          |          |          |
| 9R1        | 9.1      |           |          |          |          |          |          |
| 100        | 10       |           |          |          |          |          |          |
| 110        | 11       |           |          |          |          |          |          |
| 120        | 12       |           |          |          |          |          |          |
| 130        | 13       |           |          |          |          |          |          |
| 150        | 15       |           |          |          |          |          |          |
| 160        | 16       |           |          |          |          |          |          |
| 180        | 18       |           |          |          |          |          |          |
| 200        | 20       |           |          |          |          |          |          |
| 220        | 22       |           |          |          |          |          |          |
| 240        | 24       |           |          |          |          |          |          |
| 270        | 27       |           |          |          |          |          |          |
| 300        | 30       |           |          |          |          |          |          |
| 330        | 33       |           |          |          |          |          |          |
| 360        | 36       |           |          |          |          |          |          |
| 390        | 39       |           |          |          |          |          |          |
| 430        | 43       |           |          |          |          |          |          |
| 470        | 47       |           |          |          |          |          |          |
| 510        | 51       |           |          |          |          |          |          |
| 560        | 56       |           |          |          |          |          |          |
| 620        | 62       |           |          |          |          |          |          |
| 680        | 68       |           |          |          |          |          |          |
| 750        | 75       |           |          |          |          |          |          |
| 820        | 82       |           |          |          |          |          |          |
| 910        | 91       |           |          |          |          |          |          |
| 101        | 100      |           |          |          |          |          |          |
| 111        | 110      |           |          |          |          |          |          |
| 121        | 120      |           |          |          |          |          |          |
| 151        | 150      |           |          |          |          |          |          |
| 181        | 180      |           |          |          |          |          |          |
| 221        | 220      |           |          |          |          |          |          |
| 271        | 270      |           |          |          |          |          |          |
| 331        | 330      |           |          |          |          |          |          |
| 391        | 390      |           |          |          |          |          |          |
| 471        | 470      |           |          |          |          |          |          |
| 511        | 510      |           |          |          |          |          |          |
| 561        | 560      |           |          |          |          |          |          |
| 621        | 620      |           |          |          |          |          |          |
| 681        | 680      |           |          |          |          |          |          |
| 821        | 820      |           |          |          |          |          |          |
| 911        | 910      |           |          |          |          |          |          |
| 102        | 1000     |           |          |          |          |          |          |
| Reel QTY   |          | 5000      | 4000     | 2350     | 5000     | 3500     | 2350     |
| Horizontal |          |           |          |          |          |          |          |

Special capacitance values available upon request.



# UL Series — Ultra Low ESR Ceramic Capacitors

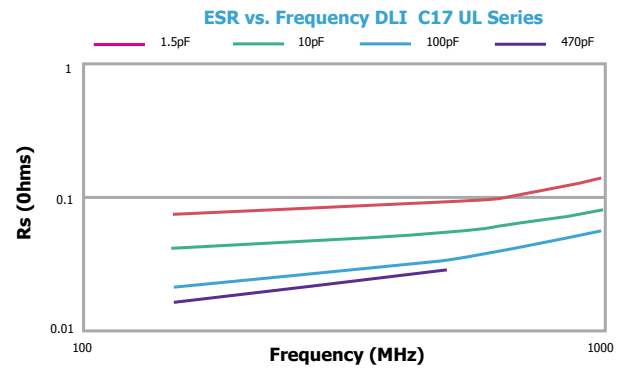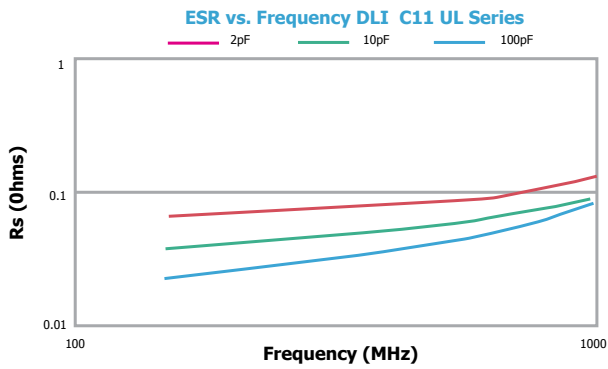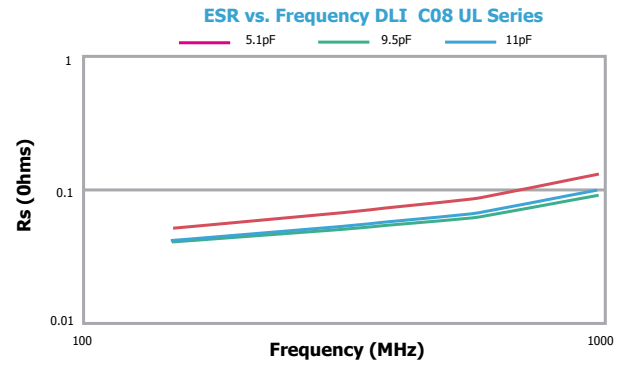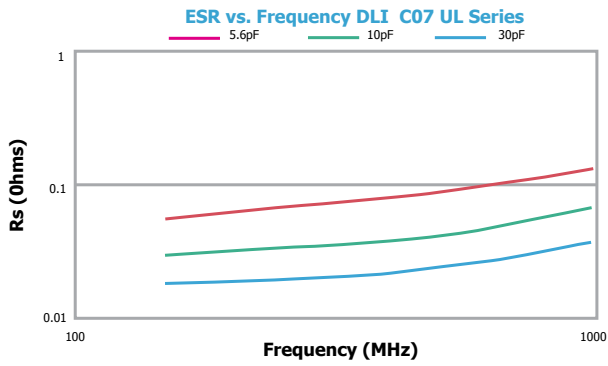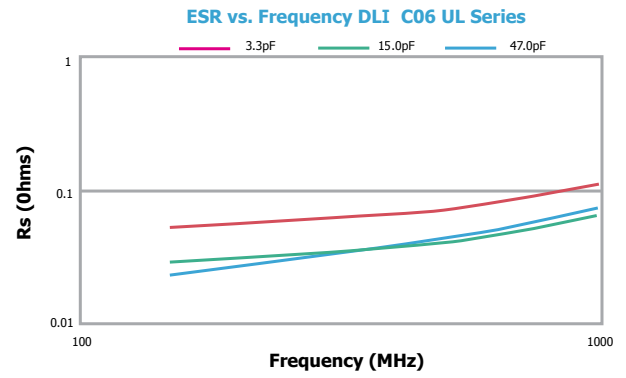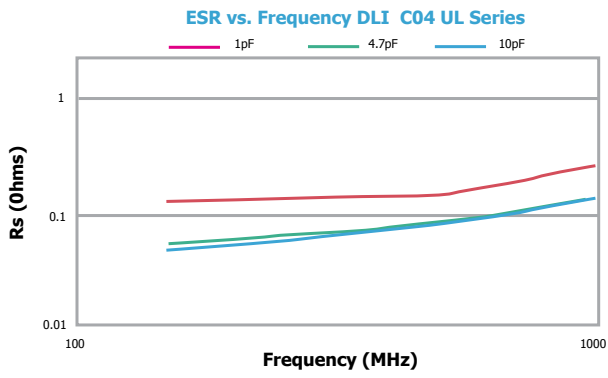


Note: This information represents typical device performance.




# UL Series — Ultra Low ESR Ceramic Capacitors


Q vs. Capacitance DLI C04 UL Series

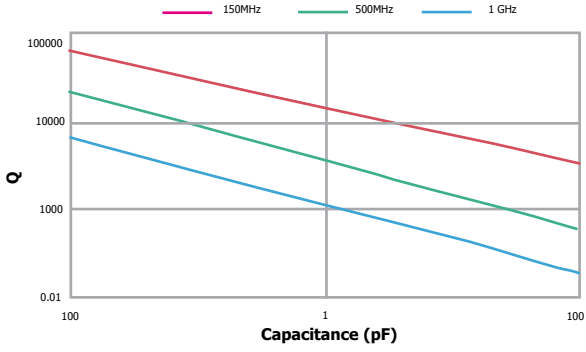


Q vs. Capacitance DLI C06 UL Series

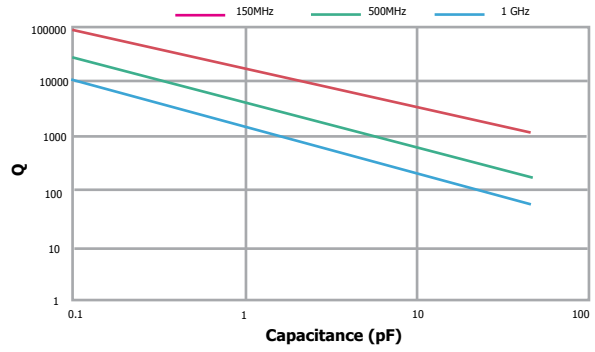


Q vs. Capacitance DLI C07 UL Series

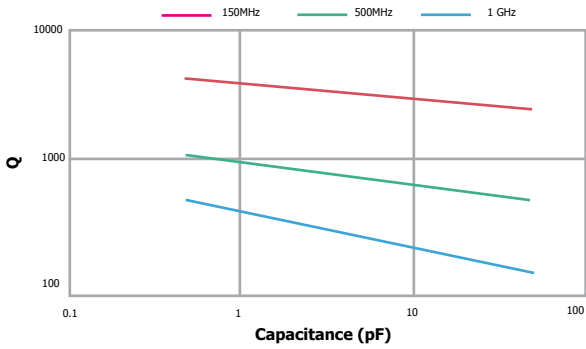


Q vs. Capacitance DLI C08 UL Series

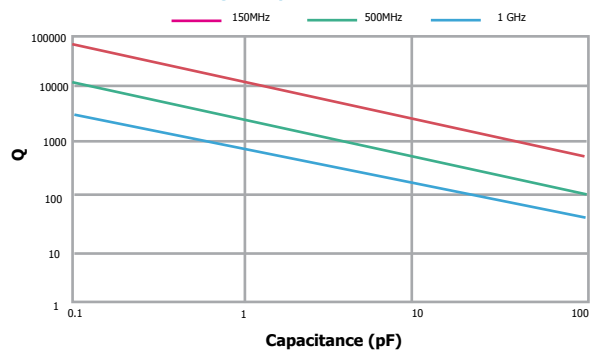

Q vs. Capacitance DLI C11 UL Series

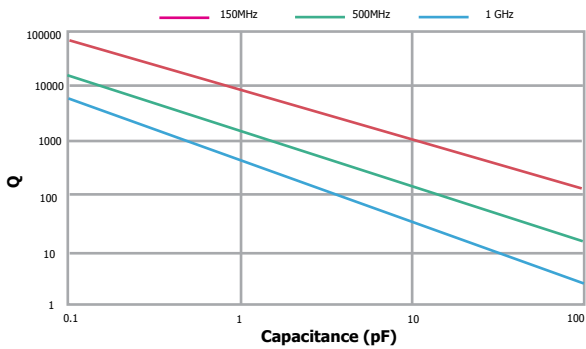







Q vs. Capacitance DLI C17 UL Series

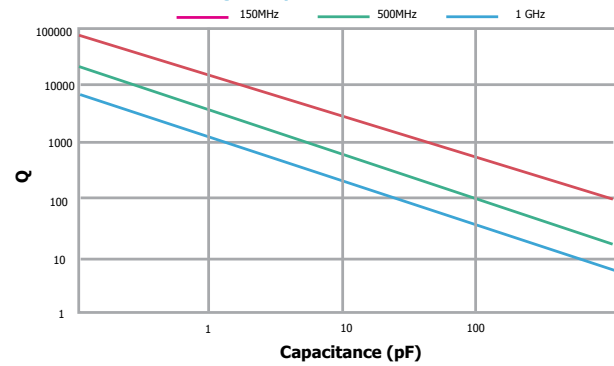

Note: This information represents typical device performance.



# UL Series — Ultra Low ESR Ceramic Capacitors

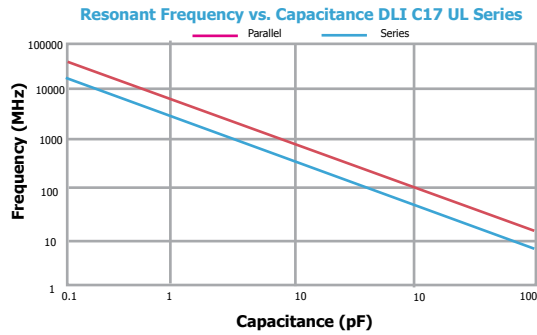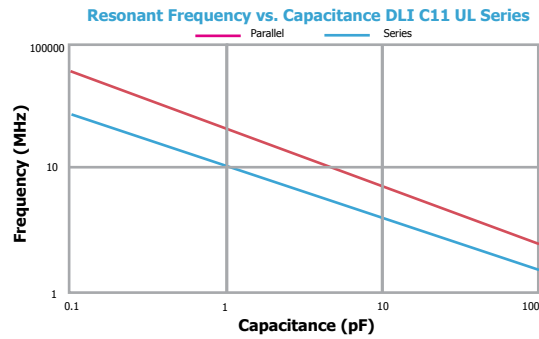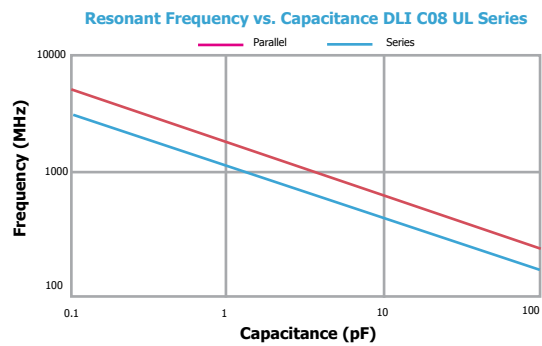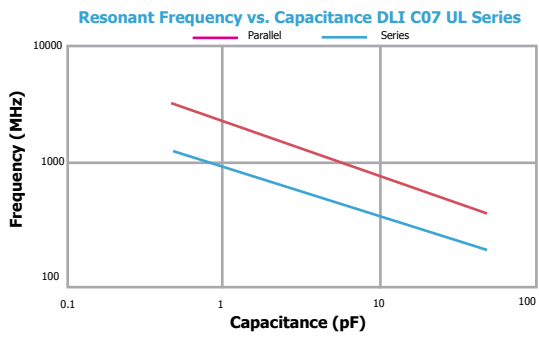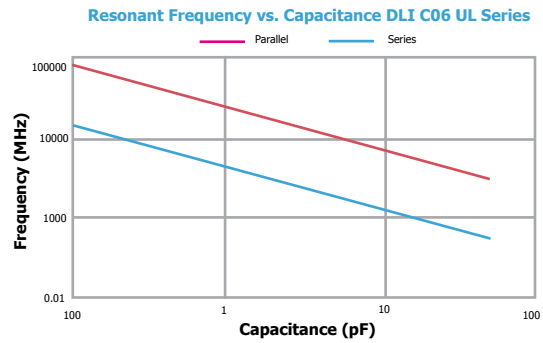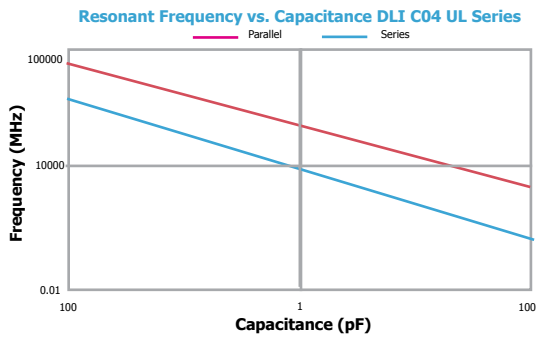

**PART NUMBER** — See page 24 for complete part number system.

| C                | 17        | UL                                       | 620              | J - 7           | U                     | N                     | X                | - 0              | T                |           |
|------------------|-----------|--|------------------|-----------------|-----------------------|-----------------------|------------------|------------------|------------------|-----------|
| MLC Capacitor    | Case Size | Material System                          | Capacitance Code | Tolerance Level | Voltage Code          | Termination Code      | Leading Code     | Test Level       | Marking Code     | Packaging |
| <b>C04</b>       | S         | <b>C04/6/7/8</b>                         | N                | <b>X</b>        | Standard              | <b>C04</b>            | 0                | <b>C04/6</b>     | T, W, B, P, S    |           |
| <b>C06</b>       | U, S, Z   | <b>C11</b>                               | A, B, D          | <b>Y</b>        | Reduced Visual        | <b>C06</b>            | 0, 1, 2          | <b>C07</b>       | W, B, P, S       |           |
| <b>C07</b>       | S, Z      | <b>C17</b>                               | A, B, C, D, E, F | <b>A</b>        | MIL-PRF-55681 Group A | <b>C07</b>            | 0, 1             | <b>C08/11/17</b> | T, V, W, B, P, S |           |
| <b>C08/11/17</b> | U, S, Z   | *Special leading requirements available. |                  |                 | <b>C</b>              | MIL-PRF-55681 Group C | <b>C08/11/17</b> | 0, 1, 2          |                  |           |
|                  |           |  |                  | <b>D</b>        | Customer Specified    |                       |                  |                  |                  |           |





# VC1 Residual Capacitors — X7R

The VC1 residual capacitance range MLCCs provide a more stable capacitance value with voltage — not to drop below 50% of the 1Vrms 1kHz value, up to full rated DC voltage, at room temperature.

They can be operated continuously at full rated voltage, but if de-rated will maintain a larger percentage of their original capacitance value, e.g., at 80% RV capacitance value equals approximately 60% - see graph.

Defined capacitance value in case sizes from 0805 to 3640, with voltage rating up to 3kV. Ideal for power supplies, capacitance critical circuits, smoothing circuits and EMI suppression.

### Operating Temperature

-55°C to +125°C

### Temperature Coefficient (Typical)

± 15%


### Insulation Resistance at +25°C

Time constant (Ri x Cr) (whichever is the least) 100GΩ or 1000s

### Aging Rate

Typical 1% per time decade

Typical Performance Curves

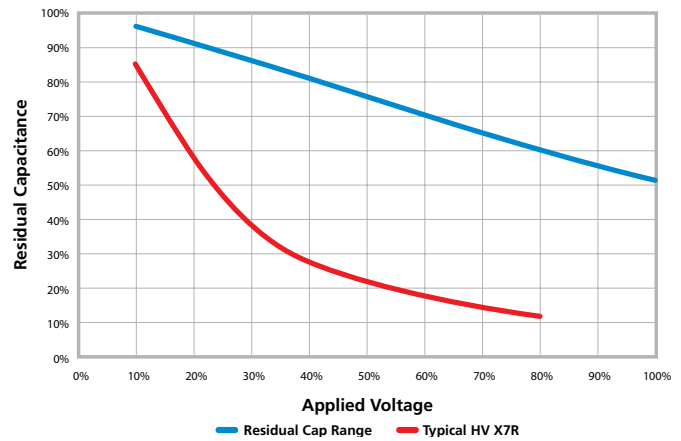

## MINIMUM/MAXIMUM CAPACITANCE VALUES — VC1 CAPACITORS

| Chip Size    | 0805   | 1206   | 1210  | 1808  | 1812  | 2220  | 2225  | 3640  |
|--------------|--------|--------|-------|-------|-------|-------|-------|-------|
| Min Cap      | 100pF  | 150pF  | 220pF | 220pF | 470pF | 1nF   | 1nF   | 2.2nF |
| 250V         | 12nF   | 39nF   | 82nF  | 82nF  | 220nF | 680nF | 1µF   | 1.8µF |
| 500V         | 2.2nF  | 6.8nF  | 15nF  | 15nF  | 56nF  | 150nF | 220nF | 560nF |
| 630V         | 1.5nF  | 4.7nF  | 8.2nF | 8.2nF | 39nF  | 100nF | 120nF | 470nF |
| 1000V        | 390pF  | 1.5nF  | 2.7nF | 2.7nF | 15nF  | 39nF  | 56nF  | 180nF |
| 1200V        | -      | 1nF    | 2.2nF | 2.2nF | 10nF  | 27nF  | 39nF  | 120nF |
| 1500V        | -      | 560pF  | 1.2nF | 1.2nF | 5.6nF | 15nF  | 22nF  | 68nF  |
| 2000V        | -      | 270pF  | 560pF | 560pF | 3.3nF | 10nF  | 12nF  | 39nF  |
| 2500V        | -      | -      | -     | -     | 1.8nF | 5.6nF | 8.2nF | 22nF  |
| 3000V        | -      | -      | -     | -     | -     | 3.9nF | 5.6nF | 12nF  |
| 7" reel qty  | 3,000  | 2,500  | 2,000 | 500   | 500   | 500   | 500   | n/a   |
| 13" reel qty | 12,000 | 10,000 | 8,000 | 2,000 | 2,000 | 2,000 | 2,000 | 500   |

**Note:** Other capacitance values may become available, please contact the Sales Office if you need values other than those shown in the above table. For dimensions and soldering information, visit [knowlescapacitors.com](http://knowlescapacitors.com).

## ORDERING INFORMATION — VC1 CAPACITORS

| 1206   | Y   | 1K0  | 0152  | K                               | X          | T   | VC1    |
|--|---|--|---|---------------------------------|------------|---|--------|
| Chip size  | Termination   | Voltage  | Capacitance in picofarads (pF)  | Capacitance tolerance           | Dielectric | Packaging   | Suffix |
| 0805<br>1206<br>1210<br>1808<br>1812<br>2220<br>2225<br>3640 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating).<br>RoHS compliant. | 250 = 250V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>1K2 = 1.2kV<br>1K5 = 1.5kV<br>2K0 = 2.0kV<br>2K5 = 2.5kV<br>3K0 = 3.0kV | First digit is zeros.<br>Second and third digits are significant figures of capacitance code.<br>The fourth digit is number of zeros following<br>Example:<br>0152 = 1500pF | J = ±5%<br>K = ±10%<br>M = ±20% | X = X7R    | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs |        |



# TCC/VCC Capacitors — (BX and BZ) X7R

X7R capacitors with a defined capacitance variation under applied dc voltage, across the full operating temperature range.

While the capacitance of COG/NP0 chips does not vary with applied voltage, standard X7R capacitors exhibit capacitance fluctuation, but with no specified limit.

For applications where a limit is required, Knowles is able to offer either a “B” code dielectric (conforms to MIL “BX” dielectric and IECQ-CECC “2X1”) or “R” code dielectric (conforms to MIL “BZ” dielectric and IECQ-CECC “2C1”).

## TCC/VCC CAPACITORS — 2X1 (BX)

| Cap. Code | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 2220 | 2225 | Cap. Code |
|-----------|------|------|------|------|------|------|------|------|-----------|
| 100pF 101 | 50V  | 100V | 50V  | 100V | 200V |      |      |      | 100pF 101 |
| 120 121   |      |      |      |      |      |      |      |      | 120 121   |
| 150 151   |      |      |      |      |      |      |      |      | 150 151   |
| 180 181   |      |      |      |      |      |      |      |      | 180 181   |
| 220 221   |      |      |      |      |      |      |      |      | 220 221   |
| 270 271   |      |      |      |      |      |      |      |      | 270 271   |
| 330 331   |      |      |      |      |      |      |      |      | 330 331   |
| 390 391   |      |      |      |      |      |      |      |      | 390 391   |
| 470 471   |      |      |      |      |      |      |      |      | 470 471   |
| 560 561   |      |      |      |      |      |      |      |      | 560 561   |
| 680 681   |      |      | 50V  | 100V | 200V |      |      |      | 680 681   |
| 820 821   |      |      |      |      |      |      |      |      | 820 821   |
| 1.0nF 102 |      |      |      | 50V  | 100V | 200V |      |      | 1.0nF 102 |
| 1.2 122   |      |      |      |      |      |      |      |      | 1.2 122   |
| 1.5 152   |      |      |      |      |      |      |      |      | 1.5 152   |
| 1.8 182   |      |      |      |      |      |      |      |      | 1.8 182   |
| 2.2 222   |      |      |      |      |      |      |      |      | 2.2 222   |
| 2.7 272   |      |      |      |      |      |      |      |      | 2.7 272   |
| 3.3 332   |      |      |      |      | 50V  | 100V | 200V |      | 3.3 332   |
| 3.9 392   |      |      |      |      |      |      |      |      | 3.9 392   |
| 4.7 472   |      |      |      |      |      |      |      |      | 4.7 472   |
| 5.6 562   |      |      |      |      |      |      |      |      | 5.6 562   |
| 6.8 682   |      |      |      |      |      |      |      |      | 6.8 682   |
| 8.2 822   |      |      |      |      |      |      |      |      | 8.2 822   |
| 10 103    |      |      |      |      |      |      |      |      | 10 103    |
| 12 123    |      |      |      |      |      |      |      |      | 12 123    |
| 15 153    |      |      |      |      |      |      |      |      | 15 153    |
| 18 183    |      |      |      |      |      |      |      |      | 18 183    |
| 22 223    |      |      |      |      |      |      |      |      | 22 223    |
| 27 273    |      |      |      |      |      |      |      |      | 27 273    |
| 33 333    |      |      |      |      |      |      |      |      | 33 333    |
| 39 393    |      |      |      |      |      |      |      |      | 39 393    |
| 47 473    |      |      |      |      |      |      |      |      | 47 473    |
| 56 563    |      |      |      |      |      |      |      |      | 56 563    |
| 68 683    |      |      |      |      |      |      |      |      | 68 683    |
| 82 823    |      |      |      |      |      |      |      |      | 82 823    |
| 100 104   |      |      |      |      |      |      |      |      | 100 104   |
| 120 124   |      |      |      |      |      |      |      |      | 120 124   |
| 150 154   |      |      |      |      |      |      |      |      | 150 154   |
| 180 184   |      |      |      |      |      |      |      |      | 180 184   |
| 220 224   |      |      |      |      |      |      |      |      | 220 224   |
| 270 274   |      |      |      |      |      |      |      |      | 270 274   |
| 330 334   |      |      |      |      |      |      |      |      | 330 334   |
| 390 394   |      |      |      |      |      |      |      |      | 390 394   |
| 470 474   |      |      |      |      |      |      |      |      | 470 474   |
| 560 564   |      |      |      |      |      |      |      |      | 560 564   |
| 680 684   |      |      |      |      |      |      |      |      | 680 684   |
| 820 824   |      |      |      |      |      |      |      |      | 820 824   |
| 1.0µF 105 |      |      |      |      |      |      |      |      | 1.0µF 105 |
| 1.2µF 125 |      |      |      |      |      |      |      |      | 1.2µF 125 |
| 1.5µF 155 |      |      |      |      |      |      |      |      | 1.5µF 155 |

● = non-RoHS compliant and FlexiCap™ termination only. Other values available in J, Y (FlexiCap™) and F terminations.



# TCC/VCC Capacitors — (BX and BZ) X7R

## TCC/VCC CAPACITORS — 2C1 (BZ)

| Cap.  | Code | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 2220 | 2225 | Cap.  | Code |
|-------|------|------|------|------|------|------|------|------|------|-------|------|
| 100pF | 101  |      |      |      |      |      |      |      |      | 100pF | 101  |
| 120   | 121  |      |      |      |      |      |      |      |      | 120   | 121  |
| 150   | 151  |      |      |      |      |      |      |      |      | 150   | 151  |
| 180   | 181  |      |      |      |      |      |      |      |      | 180   | 181  |
| 220   | 221  |      |      |      |      |      |      |      |      | 220   | 221  |
| 270   | 271  |      |      |      |      |      |      |      |      | 270   | 271  |
| 330   | 331  |      |      |      |      |      |      |      |      | 330   | 331  |
| 390   | 391  |      |      |      |      |      |      |      |      | 390   | 391  |
| 470   | 471  |      |      |      |      |      |      |      |      | 470   | 471  |
| 560   | 561  |      |      |      |      |      |      |      |      | 560   | 561  |
| 680   | 681  |      |      |      |      |      |      |      |      | 680   | 681  |
| 820   | 821  |      |      |      |      |      |      |      |      | 820   | 821  |
| 1.0nF | 102  |      |      |      |      |      |      |      |      | 1.0nF | 102  |
| 1.2   | 122  |      |      |      |      |      |      |      |      | 1.2   | 122  |
| 1.5   | 152  |      |      |      |      |      |      |      |      | 1.5   | 152  |
| 1.8   | 182  |      |      |      |      |      |      |      |      | 1.8   | 182  |
| 2.2   | 222  |      |      |      |      |      |      |      |      | 2.2   | 222  |
| 2.7   | 272  |      |      |      |      |      |      |      |      | 2.7   | 272  |
| 3.3   | 332  |      |      |      |      |      |      |      |      | 3.3   | 332  |
| 3.9   | 392  |      |      |      |      |      |      |      |      | 3.9   | 392  |
| 4.7   | 472  |      |      |      |      |      |      |      |      | 4.7   | 472  |
| 5.6   | 562  |      |      |      |      |      |      |      |      | 5.6   | 562  |
| 6.8   | 682  |      |      |      |      |      |      |      |      | 6.8   | 682  |
| 8.2   | 822  |      |      |      |      |      |      |      |      | 8.2   | 822  |
| 10    | 103  |      |      |      |      |      |      |      |      | 10    | 103  |
| 12    | 123  |      |      |      |      |      |      |      |      | 12    | 123  |
| 15    | 153  |      |      |      |      |      |      |      |      | 15    | 153  |
| 18    | 183  |      |      |      |      |      |      |      |      | 18    | 183  |
| 22    | 223  |      |      |      |      |      |      |      |      | 22    | 223  |
| 27    | 273  |      |      |      |      |      |      |      |      | 27    | 273  |
| 33    | 333  |      |      |      |      |      |      |      |      | 33    | 333  |
| 39    | 393  |      |      |      |      |      |      |      |      | 39    | 393  |
| 47    | 473  |      |      |      |      |      |      |      |      | 47    | 473  |
| 56    | 563  |      |      |      |      |      |      |      |      | 56    | 563  |
| 68    | 683  |      |      |      |      |      |      |      |      | 68    | 683  |
| 82    | 823  |      |      |      |      |      |      |      |      | 82    | 823  |
| 100   | 104  |      |      |      |      |      |      |      |      | 100   | 104  |
| 120   | 124  |      |      |      |      |      |      |      |      | 120   | 124  |
| 150   | 154  |      |      |      |      |      |      |      |      | 150   | 154  |
| 180   | 184  |      |      |      |      |      |      |      |      | 180   | 184  |
| 220   | 224  |      |      |      |      |      |      |      |      | 220   | 224  |
| 270   | 274  |      |      |      |      |      |      |      |      | 270   | 274  |
| 330   | 334  |      |      |      |      |      |      |      |      | 330   | 334  |
| 390   | 394  |      |      |      |      |      |      |      |      | 390   | 394  |
| 470   | 474  |      |      |      |      |      |      |      |      | 470   | 474  |
| 560   | 564  |      |      |      |      |      |      |      |      | 560   | 564  |
| 680   | 684  |      |      |      |      |      |      |      |      | 680   | 684  |
| 820   | 824  |      |      |      |      |      |      |      |      | 820   | 824  |
| 1.0μF | 105  |      |      |      |      |      |      |      |      | 1.0μF | 105  |
| 1.2μF | 125  |      |      |      |      |      |      |      |      | 1.2μF | 125  |
| 1.5μF | 155  |      |      |      |      |      |      |      |      | 1.5μF | 155  |

● = non-RoHS compliant and FlexiCap™ termination only. Other values available in J, Y (FlexiCap™) and F terminations.

## ORDERING INFORMATION — TCC/VCC CAPACITORS

| 0603   | J  | 050   | 0471  | J   | B   | B   | ---                                     |
|--|--|---|---|---|---|---|---|
| Chip size  | Termination  | Voltage   | Capacitance in picofarads (pF)  | Capacitance tolerance   | Dielectric  | Packing   | Suffix code                             |
| <b>0603</b><br><b>0805</b><br><b>1206</b><br><b>1210</b><br><b>1808</b><br><b>1812</b><br><b>2220</b><br><b>2225</b> | <p><b>Y</b> = FlexiCap™ termination base with Ni barrier (100% matte tin plating). RoHS compliant.</p> <p><b>H</b> = FlexiCap™ termination base with Ni barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.</p> <p><b>F</b> = Silver Palladium. RoHS compliant.</p> <p><b>J</b> = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.</p> <p><b>A</b> = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.</p> | <p><b>050</b> = 50V<br/> <b>100</b> = 100V<br/> <b>200</b> = 200V</p> | <p>1st digit is 0.<br/>                     2nd and 3rd digits are significant figures of capacitance code.<br/>                     The 4th digit is number of 0's following<br/>                     eg. <b>0471</b> = 470pF<br/> <b>0824</b> = 820nF</p> | <p><b>G</b> = ±2%<br/> <b>J</b> = ±5%<br/> <b>K</b> = ±10%<br/> <b>M</b> = ±20%</p> | <p><b>B</b> = 2X1/BX released in accordance with IECQ-CECC</p> <p><b>R</b> = 2C1/BZ released in accordance with IECQ-CECC</p> | <p><b>T</b> = 178mm (7") reel<br/> <b>R</b> = 330mm (13") reel<br/> <b>B</b> = Bulk pack — tubs</p> | Used for specific customer requirements |

# Open Mode Capacitors — COG/NP0 (1B) and X7R (2R1)




Open Mode capacitors have been designed specifically for use in applications where mechanical cracking is a severe problem and short circuits due to cracking are unacceptable.

Open Mode capacitors use inset electrode margins, which prevent any mechanical cracks that may form during board assembly from connecting to the internal electrodes.

When combined with FlexiCap™ termination, Open Mode capacitors provide a robust component with the assurance that if a part becomes cracked, the crack will be unlikely to result in short circuit failure.

Qualification included cracking the components by severe bend tests. Following the bend tests, cracked components were subjected to endurance/humidity tests, with no failures evident due to short circuits. Note: Depending on the severity of the crack, capacitance loss was between 0% and 70%.  
Note: Blue Background = AEC-Q200.

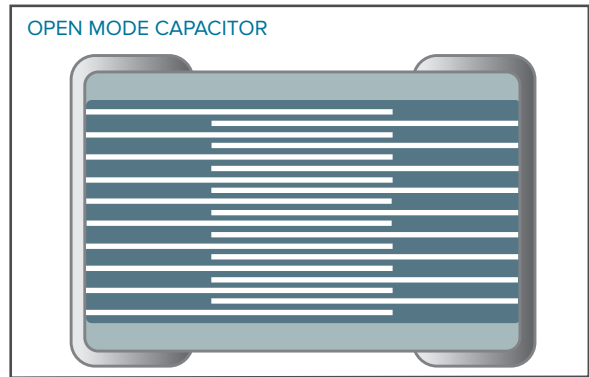

## OPEN MODE — COG/NP0 (1B) — CAPACITANCE VALUES

| COG/NP0 (1B)   | 0603  | 0805   | 1206  | 1210  | 1808  | 1812  | 2220  | 2225  |
|----------------|-------|--------|-------|-------|-------|-------|-------|-------|
| Max. Thickness | 0.8mm | 1.37mm | 1.7mm | 2.0mm | 2.0mm | 2.5mm | 2.5mm | 2.5mm |
| Min cap        | 10pF  | 10pF   | 10pF  | 22pF  | 22pF  | 47pF  | 68pF  | 100pF |
| 16/25V         | 82pF  | 82pF   | 82pF  | 82pF  | 82pF  | 120pF | 180pF | 270pF |
| 50/63V         | 82pF  | 82pF   | 82pF  | 82pF  | 82pF  | 120pF | 180pF | 270pF |
| 100V           | 82pF  | 82pF   | 82pF  | 82pF  | 82pF  | 120pF | 180pF | 270pF |
| 200/250V       | 82pF  | 82pF   | 82pF  | 82pF  | 82pF  | 120pF | 180pF | 270pF |
| 500V           | —     | 82pF   | 82pF  | 82pF  | 82pF  | 120pF | 180pF | 270pF |
| 630V           | —     | 47pF   | 82pF  | 82pF  | 82pF  | 120pF | 180pF | 270pF |
| 1kV            | —     | 47pF   | 82pF  | 82pF  | 82pF  | 120pF | 180pF | 270pF |

## OPEN MODE — X7R (2R1) — CAPACITANCE VALUES

| X7R (2R1)      | 0603  | 0805        | 1206        | 1210        | 1808  | 1812  | 2220  | 2225        |
|----------------|-------|-------------|-------------|-------------|-------|-------|-------|-------------|
| Max. Thickness | 0.8mm | 1.37mm      | 1.7mm       | 2.0mm       | 2.0mm | 2.5mm | 2.5mm | 2.5mm       |
| Min cap        | 100pF | 100pF       | 100pF       | 100pF       | 100pF | 150pF | 220pF | 330pF       |
| 16V            | 39nF  | 100nF 150nF | 220nF 470nF | 470nF 680nF | 680nF | 1.5µF | 3.3µF | 4.7µF       |
| 25V            | 33nF  | 100nF 120nF | 220nF 330nF | 470nF 560nF | 560nF | 1.2µF | 2.2µF | 3.9µF       |
| 50/63V         | 22nF  | 100nF       | 220nF       | 470nF       | 470nF | 1µF   | 1.5µF | 2.7µF       |
| 100V           | 6.8nF | 27nF        | 100nF       | 220nF       | 220nF | 680nF | 1µF   | 1.5µF 1.8µF |
| 200/250V       | 2.7nF | 22nF        | 68nF        | 100nF       | 100nF | 330nF | 680nF | 1µF         |
| 500V           | —     | 5.6nF       | 39nF        | 68nF        | 68nF  | 180nF | 330nF | 390nF       |
| 630V           | —     | —           | 22nF        | 33nF        | 27nF  | 100nF | 180nF | 220nF       |
| 1kV            | —     | —           | 6.8nF       | 15nF        | 15nF  | 47nF  | 100nF | 100nF       |

## ORDERING INFORMATION — OPEN MODE CAPACITORS

| 1206   | Y  | 050   | 0224   | K   | X  | T  | ---                       |
|--|--|---|--|---|--|--|---------------------------|
| Chip Size  | Termination  | Voltage   | Capacitance in Picofarads (pF)   | Capacitance Tolerance   | Dielectric Release Codes   | Packaging  | Suffix Code               |
| 0603<br>0805<br>1206<br>1210<br>1808<br>1812<br>2220<br>2225 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating), RoHS compliant. | 016 = 16V<br>050 = 50V<br>100 = 100V<br>250 = 250V<br>630 = 630V<br>025 = 25V<br>063 = 63V<br>200 = 200V<br>500 = 500V<br>1K0 = 1kV | First digit is 0. Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following.<br>Example: 0224 = 220000pF | F = ±1% G = ±2%<br>J = ±5% K = ±10%<br>M = ±20%<br>Note: X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NP0 (1B) to AEC-Q200<br>E = X7R (2R1) to AEC-Q200 - original<br>S = X7R (2R1) to AEC-Q200 - recommended<br><br>C = COG/NP0 (1B)<br>X = X7R (2R1) - original<br>J = X7R (2R1) - recommended | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays | M01 = Open Mode capacitor |



# Tandem Capacitors — X7R (2R1)




Tandem capacitors have been designed as a fail safe range, using a series section internal design, for use in any application where short circuits would be unacceptable.

When combined with FlexiCap™ termination, Tandem capacitors provide an ultra robust and reliable component, for use in the most demanding applications.

Non-standard voltages are available. For more information, please consult the Knowles Capacitors Sales Office.

Qualification included cracking the components by severe bend tests. Following the bend tests, cracked components were subjected to endurance/humidity tests, with no failures evident due to short circuits. Note: Depending on the severity of the crack, capacitance loss was between 0% and 50%.

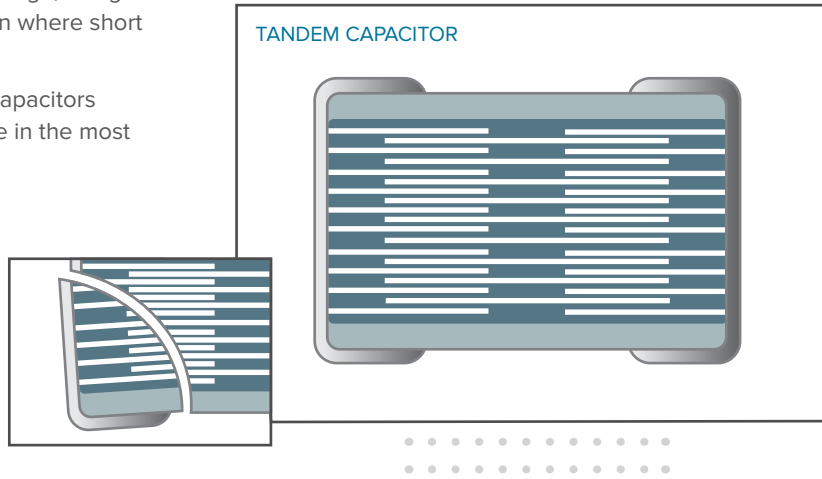


## TANDEM — X7R (2R1) — CAPACITANCE VALUES

| X7R (2R1)      | 0603  | 0805   | 1206  | 1210  | 1812  | 2220  | 2225  |
|----------------|-------|--------|-------|-------|-------|-------|-------|
| Max. Thickness | 0.8mm | 1.39mm | 1.7mm | 2.0mm | 2.0mm | 2.5mm | 2.5mm |
| Min cap        | 100pF | 100pF  | 100pF | 100pF | 150pF | 220pF | 330pF |
| 16V            | 12nF  | 47nF   | 150nF | 270nF | 560nF | 1.2µF | 1.5µF |
| 25V            | 10nF  | 39nF   | 120nF | 220nF | 470nF | 1µF   | 1.2µF |
| 50/63V         | 6.8nF | 33nF   | 100nF | 180nF | 390nF | 680nF | 1µF   |
| 100V           | 2.2nF | 10nF   | 47nF  | 82nF  | 220nF | 470nF | 680nF |
| 200/250V       | 1nF   | 4.7nF  | 22nF  | 47nF  | 100nF | 220nF | 330nF |

Note: Blue Background= AEC-Q200.

## ORDERING INFORMATION — TANDEM CAPACITORS

| 1206   | Y   | 050  | 0224   | K                               | X   | T  | ---                    |
|--|---|--|--|---------------------------------|---|--|------------------------|
| Chip Size  | Termination   | Voltage  | Capacitance in Picofarads (pF)   | Capacitance Tolerance           | Dielectric Codes  | Packaging  | Suffix Code            |
| 0603<br>0805<br>1206<br>1210<br>1812<br>2220<br>2225 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating).<br>RoHS compliant. | 050 = 50V<br>063 = 63V<br>100 = 100V<br>200 = 200V<br>250 = 250V | First digit is 0. Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following.<br><br>Example: 0224 = 220000pF | J = ±5%<br>K = ±10%<br>M = ±20% | E = X7R (2R1) to AEC-Q200 — original<br><br>X = X7R (2R1) | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays | T01 = Tandem capacitor |

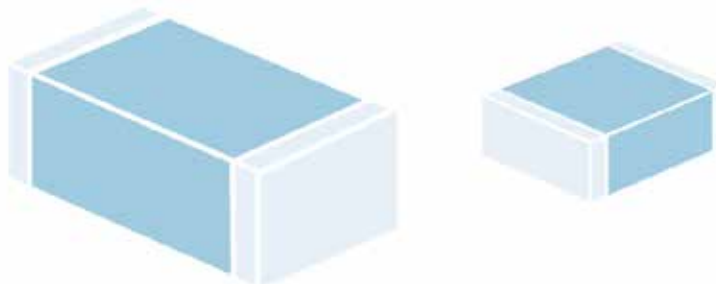

# IECQ-CECC Range — Specialty High Reliability and Approved Parts

A range of specialist, high reliability, multilayer ceramic capacitors for use in critical or high reliability environments. All fully tested/approved and available with a range of suitable termination options, including tin/lead plating and Knowles FlexiCap™.



Ranges include:

1. Range tested and approved in accordance with IECQ-CECC QC32100.
2. Range qualified to the requirements of Knowles detail specification S02A-0100 (based on ESCC 3009).

## IECQ-CECC — MAXIMUM CAPACITANCE VALUES

|          |         | 0603  | 0805  | 1206* | 1210  | 1808  | 1812  | 2220  | 2225  |
|----------|---------|-------|-------|-------|-------|-------|-------|-------|-------|
| 16V      | COG/NPO | 1.5nF | 6.8nF | 22nF  | 33nF  | 33nF  | 100nF | 150nF | 220nF |
|          | X7R     | 100nF | 330nF | 1.0µF | 1.5µF | 1.5µF | 3.3µF | 5.6µF | 6.8µF |
| 25V      | COG/NPO | 1.0nF | 4.7nF | 15nF  | 22nF  | 27nF  | 68nF  | 100nF | 150nF |
|          | X7R     | 56nF  | 220nF | 820nF | 1.2µF | 1.2µF | 2.2µF | 4.7µF | 5.6µF |
| 50/63V   | COG/NPO | 470pF | 2.7nF | 10nF  | 18nF  | 18nF  | 33nF  | 68nF  | 100nF |
|          | X7R     | 47nF  | 220nF | 470nF | 1.0µF | 680nF | 1.5µF | 2.2µF | 3.3µF |
| 100V     | COG/NPO | 330pF | 1.8nF | 6.8nF | 12nF  | 12nF  | 27nF  | 47nF  | 68nF  |
|          | X7R     | 10nF  | 47nF  | 150nF | 470nF | 330nF | 1.0µF | 1.5µF | 1.5µF |
| 200/250V | COG/NPO | 100pF | 680pF | 2.2nF | 4.7nF | 4.7nF | 12nF  | 22nF  | 27nF  |
|          | X7R     | 5.6nF | 27nF  | 100nF | 220nF | 180nF | 470nF | 1.0µF | 1.0µF |
| 500V     | COG/NPO | n/a   | 330pF | 1.5nF | 3.3nF | 3.3nF | 10nF  | 15nF  | 22nF  |
|          | X7R     | n/a   | 8.2nF | 33nF  | 100nF | 100nF | 270nF | 560nF | 820nF |
| 1kV      | COG/NPO | n/a   | n/a   | 470pF | 1.0nF | 1.2nF | 3.3nF | 8.2nF | 10nF  |
|          | X7R     | n/a   | n/a   | 4.7nF | 15nF  | 18nF  | 56nF  | 120nF | 150nF |

\*Maximum thickness for 1206 part is 1.6mm, 0.063"

## ORDERING INFORMATION — IECQ-CECC RANGE

| 1210   | Y  | 100  | 0103  | J  | D  | T  | ---                                     |
|--|--|--|---|--|--|--|---|
| Chip size  | Termination  | Voltage  | Capacitance in picofarads (pF)  | Capacitance tolerance  | Dielectric Release codes   | Packaging  | Suffix code                             |
| <b>0603</b><br><b>0805</b><br><b>1206</b><br><b>1210</b><br><b>1808</b><br><b>1812</b><br><b>2220</b><br><b>2225</b> | <p><b>Y</b> = FlexiCap™ termination base with Ni barrier (100% matte tin plating). RoHS compliant.</p> <p><b>H</b> = FlexiCap™ termination base with Ni barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.</p> <p><b>F</b> = Silver Palladium. RoHS compliant.</p> <p><b>J</b> = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.</p> <p><b>A</b> = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.</p> | <p><b>016</b> = 16V<br/> <b>025</b> = 25V<br/> <b>050</b> = 50V<br/> <b>063</b> = 63V<br/> <b>100</b> = 100V<br/> <b>200</b> = 200V<br/> <b>250</b> = 250V<br/> <b>500</b> = 500V<br/> <b>630</b> = 630V<br/> <b>1K0</b> = 1kV</p> | <p>First digit is 0.</p> <p>Second and third digits are significant figures of capacitance code.</p> <p>The fourth digit is number of zeros following</p> <p>Example:<br/> <b>0103</b> = 10nF</p> | <p>&lt;10pF<br/> <b>B</b> = ±0.1pF<br/> <b>C</b> = ±0.25pF<br/> <b>D</b> = ±0.5pF<br/> ≥10pF<br/> <b>F</b> = ±1%<br/> <b>G</b> = ±2%<br/> <b>J</b> = ±5%<br/> <b>K</b> = ±10%<br/> <b>M</b> = ±20%</p> | <p><b>D</b> = X7R (2R1) with IECQ-CECC release</p> <p><b>F</b> = COG/NPO (1B/NPO) with IECQ-CECC release</p> <p><b>B</b> = 2X1/BX released in accordance with IECQ-CECC</p> <p><b>R</b> = 2C1/BZ released in accordance with IECQ-CECC</p> <p>For <b>B</b> and <b>R</b> codes, please refer to TCC/VCC range for full capacitance values</p> | <p><b>T</b> = 178mm (7") reel<br/> <b>R</b> = 330mm (13") reel<br/> <b>B</b> = Bulk pack — tubs or trays</p> | Used for specific customer requirements |



# High Capacitance Chip — X7R and X5R

A range of High Capacitance value BME MLC chip capacitors, in stable Class II dielectrics X7R and X5R, with a spread of capacitance values offered up to 100µF.

Comparable circuit designs can be achieved at typically a third to a fifth of the capacitance values because of the low ESR characteristics these parts exhibit. As a consequence, they are also ideal to replace Tantalum and Low ESR Electrolytic capacitors without polarity concerns. They find application as power supply bypass capacitors, smoothing capacitors, input/output filters in DC-DC converters and in digital circuits and LCD modules.

Parts are RoHS compliant and suitable for reflow soldering process.

- Nickel barrier terminations with tin, tin/lead or gold flash
- Capacitance tolerances available: ±10%, ±20%
- Available with high reliability screening. Contact the Knowles Precision Devices Sales Office

## CAPACITANCE VALUES — HIGH CAPACITANCE CHIP

| Size       |                | 0402   |   | 0603           |                                  | 0805  |   | 1206                             |                           | 1210                                     |  | 1812               |   |   |
|------------|----------------|--|---|----------------|----------------------------------|---|---|----------------------------------|---------------------------|--|--|--------------------|---|---|
| Tmax       | inches:<br>mm: | 0.024<br>0.61                                  |   | 0.035<br>0.89  |                                  | 0.054<br>1.37                                 |   | 0.072*<br>1.83                   |                           | 0.085*<br>2.16                           |  | 0.110*<br>2.79     |   |   |
| Dielectric |                | X7R  | X5R   | X7R            | X5R                              | X7R   | X5R                                       | X7R                              | X5R                       | X7R                                      | X5R                                      | X7R                | X5R                                     |   |
| 4V         |                |  |   |                | 22µF <sup>†</sup>                |   |   |                                  | 100µF <sup>†</sup>        |  |  |                    | -                                       |   |
| 6.3V       |                | 470nF  | 1µF<br>2.2µF <sup>†</sup><br>4.7µF <sup>†</sup> |                | 4.7µF<br>10µF <sup>†</sup>       |   | 22µF <sup>†</sup>                         |                                  | 47µF <sup>†</sup>         |  | 47µF <sup>†</sup>                        | 47µF <sup>†</sup>  | 100µF <sup>†</sup>                      | - |
| 10V        |                |  | 1µF   | 2.2µF          | 4.7µF<br>10µF <sup>†</sup>       | 10µF <sup>†</sup>                             | 10µF                                      | 22µF <sup>†</sup>                | 22µF <sup>†</sup>         |  | 22µF <sup>†</sup>                        |                    | 47µF <sup>†</sup>                       | - |
| 16V        |                | 15nF<br>22nF<br>33nF<br>47nF<br>100nF<br>220nF | 220nF<br>470nF<br>100nF<br>220nF<br>470nF       | 100nF<br>1µF   | 2.2µF<br>4.7µF                   | 470nF<br>1.0µF<br>2.2µF<br>4.7µF <sup>†</sup> | 4.7µF<br>10µF                             | 10µF                             | 10µF<br>22µF <sup>†</sup> | 4.7µF <sup>†</sup><br>10µF <sup>†</sup>  |  |                    | 22µF <sup>†</sup>                       | - |
| 25V        |                | 6.8nF<br>10nF<br>47nF<br>100nF                 | 10nF<br>220nF                                   | 470nF<br>1.0µF | 220nF<br>470nF<br>1.0µF<br>2.2µF | 1.0µF<br>2.2µF<br>4.7µF                       | 2.2µF<br>4.7µF                            | 2.2µF<br>4.7µF<br>10µF           | 4.7µF<br>10µF             | 3.3µF <sup>†</sup><br>4.7µF <sup>†</sup> | 4.7µF <sup>†</sup><br>10µF <sup>†</sup>  | 22µF <sup>†</sup>  |   | - |
| 35V        |                |  |   |                |                                  |   |   |                                  |                           |  | 2.2µF <sup>†</sup><br>4.7µF <sup>†</sup> |                    | 10µF                                    | - |
| 50V        |                | 10nF   | 100nF   | 220nF<br>470nF | 100nF<br>470nF<br>1.0µF          | 220nF<br>470nF<br>1.0µF<br>2.2µF              | 220nF<br>470nF<br>1.0µF<br>2.2µF<br>4.7µF | 470nF<br>1.0µF<br>2.2µF<br>4.7µF | 4.7µF                     | 1.0µF                                    |  | 4.7µF <sup>†</sup> | 4.7µF <sup>†</sup><br>10µF <sup>†</sup> | - |
| 100V       |                |  |   | 100nF          |                                  | 220nF   |   | 1.0µF                            |                           | 1.0µF<br>2.2µF                           |  |                    | 1.0µF<br>2.2µF                          | - |

\* Denotes non-standard chip thickness. Order code needs to have an "X" inserted together with the dimension in inches, e.g., X072 where dimension is 0.072".



† Denotes only available in ±20% capacitance tolerance.





# High Capacitance Chip — X7R and X5R

## COMPARISON WITH OTHER DIELECTRIC CAPACITORS

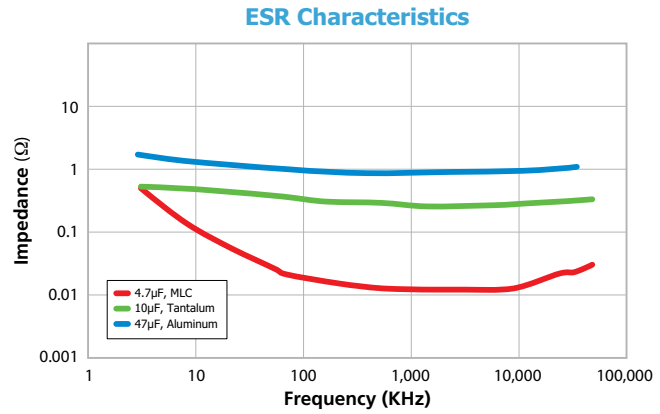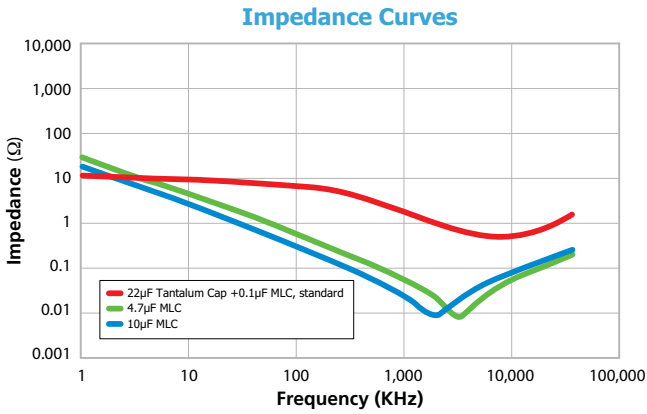

## DIELECTRIC CHARACTERISTICS

|                                  | X7R (BB) Stable   | X5R (BW) Stable   |
|----------------------------------|---|---|
| Operating temperature range:     | -55°C to 125°C  | -55°C to 85°C   |
| Temperature coefficient:         | ±15% ΔC Max.  | ±15% ΔC Max.  |
| Dissipation factor:              | 3.5%, max, except:<br>0402 ≥ 0.1µF = 5%,<br>0603 ≥ 0.22µF = 10%,<br>0805 ≥ 1.0µF = 5%,<br>0805 ≥ 2.2µF = 10%,<br>1206 ≥ 2.2µF = 10%,<br>1210 ≥ 4.7µF = 5%,<br>1210 ≥ 22µF = 10% | 5%, max, except:<br>0402 ≥ 1.0µF = 10%,<br>0603 ≥ 1.0µF = 10%,<br>0805 ≥ 4.7µF = 10%,<br>1206 ≥ 4.7µF = 10%,<br>1210 ≥ 10µF = 10% |
| Insulation resistance @25°C:     | >10GΩ or >100ΩF, whichever is less  | >10GΩ or >100ΩF, whichever is less  |
| Dielectric withstanding voltage: | 250%  | 250%  |
| Aging rate:                      | X7R 3.5% typical  | X5R 5% typical  |
| Test parameters @ 25°C:          | 1KHz, 1.0 ±0.2 VRMS   | 1KHz, 1.0 ±0.2 VRMS   |
|                                  |   | 120Hz, 0.5 ±0.1 VRMS for 22µF, 47µF & 100µF   |

## ORDERING INFORMATION — HIGH CAPACITANCE CHIP CAPACITORS

| 1206   | W   | 476   | K                                    | 6R3   | N   | X080   | T  |
|--|---|---|--------------------------------------|---|---|--|--|
| Chip sizes   | Dielectric  | Capacitance   | Tolerance                            | Voltage-VDCW  | Termination   | Thickness option   | Packing                                    |
| <b>0402</b><br><b>0603</b><br><b>0805</b><br><b>1206</b><br><b>1210</b><br><b>1812</b> | BB* = X7R<br>BW* = X5R<br><br>*Formerly B & W codes | Value in Picofarads.<br>Two significant figures, followed by number of zeros:<br><b>476</b> = 47µF (47,000,000pF) | <b>K</b> = ± 10%<br><b>M</b> = ± 20% | Two significant figures, followed by number of zeros.<br>R denotes decimal point:<br><b>6R3</b> = 6.3V<br><b>501</b> = 500V | <b>N</b> = Nickel Barrier (100% tin)<br><b>Y</b> = Nickel Barrier (90% tin/10% lead)<br><b>NG</b> = Nickel Barrier Gold Flash | Blank = Standard thickness<br><b>X</b> = special thickness, specified in inches:<br><b>X085</b> = 0.085" | No suffix = Bulk<br><b>T</b> = Tape & Reel |

Note: BME parts available with added high reliability test. Consult the factory.



# StackiCap™ Capacitors — AEC-Q200 and Standard Ranges



The StackiCap™ range offers a significant reduction in "PCB real estate" for an equivalent capacitance value when board space is at a premium. For example, a standard 150nF chip in an 8060 case size is now available in a much smaller 3640 case size.

Knowles Precision Devices' unique patented\* construction and FlexiCap™ termination material make the StackiCap™ range suitable for applications including: power supplies, lighting, aerospace electronics and high voltage applications where a large amount of capacitance is required. Further developments are ongoing, please contact the Knowles Precision Devices sales office for details of the full range.

\*StackiCap™ technology is protected by international patents (pending) EP2847776, WO2013186172A1, US20150146343A1 and CN104471660A.



**MAXIMUM CAPACITANCE:** Up to 5.6µF

**MAXIMUM VOLTAGE:** Up to 2kV

**INSULATION RESISTANCE:** Time Constant (RxCr) (whichever is the least — 500s or 500MΩ)

## CAPACITANCE VALUES — STACKICAP™ CAPACITORS

| Chip Size      | 1812           | 2220            | 3640            |
|----------------|----------------|-----------------|-----------------|
| Max. Thickness | 3.5mm          | 4.5mm           | 4.2mm           |
| 200/250V       | 820nF - 1.0µF  | 1.2µF - 2.2µF   | 3.9µF - 5.6µF   |
| 500V           | 390nF - 470nF  | 680nF - 1.2µF   | 1.2µF - 2.7µF   |
| 630V           | 220nF - 330nF  | 330nF - 1.0µF   | 820nF - 2.2µF   |
| 1kV            | 120nF - 180nF  | 150nF - 470nF   | 220nF - 1µF     |
| 1.2kV          | (39nF - 100nF) | (100nF - 220nF) | (180nF - 470nF) |
| 1.5kV          | (27nF - 56nF)  | (56nF - 150nF)  | (120nF - 330nF) |
| 2kV            | -              | (39nF - 100nF)  | (56nF - 150nF)  |

Note: Blue Background = AEC-Q200 | Values shown in parentheses require conformal coating after mounting (suffix code WS3 applies). All other values use suffix code WS2.

## ORDERING INFORMATION — STACKICAP™ CAPACITORS

| 1812                 | Y   | 500  | 0474  | K                               | J  | T  | WS2            |
|----------------------|---|--|---|---------------------------------|--|--|----------------|
| Chip Size            | Termination   | Voltage  | Capacitance in Picofarads (pF)  | Capacitance tolerance           | Dielectric                                     | Packaging  | Suffix code    |
| 1812<br>2220<br>3640 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br>H = FlexiCap™ Termination base with nickel barrier (Tin/lead plating with minimum 10% lead). Not RoHS compliant. | 200 = 200V<br>250 = 250V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>1K2 = 1.2kV<br>1K5 = 1.5kV<br>2K0 = 2kV | First digit is 0. Second and third digits are significant figures of capacitance code in picofarads (pF). Fourth digit is number of zeros; e.g., 0474 = 470nF<br>Values are E12 series. | J = ±5%<br>K = ±10%<br>M = ±20% | E = X7R (2R1) to AEC-Q200<br><br>X = X7R (2R1) | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays | WS2<br><br>WS3 |

Note: Suffix code WS3 applies to parts with a rated voltage ≥ 1.2kV, and indicates conformal coating is required after mounting. For all other parts use suffix code WS2.

## REELED QUANTITIES — STACKICAP™ CAPACITORS

|                  | 1812  | 2220  | 3640 |
|------------------|-------|-------|------|
| 178mm (7") Reel  | 500   | 500   | -    |
| 330mm (13") Reel | 2,000 | 2,000 | 500  |



Note:  
Parts in this range may be defined as dual-use under export control legislation and may be subject to export license restrictions. Please refer to page 15 for more information on the dual-use regulations and contact the Knowles Precision Devices sales office for further information on specific part numbers.



# 250Vac Rated 50/60Hz AC Capacitors — COG/NPO and X7R

Industry-wide standard multilayer ceramic capacitors are supplied with a DC rating only. For AC use, Surge and Safety capacitors with an AC rating of 250Vac have been available, but the capacitance range is limited as a result of the strict impulse and VP requirements in the international standards. Knowles has developed a range that provides a solution for use at up to 250Vac 60Hz continuous use and provides for non-safety-critical applications where extended capacitance ranges are required.

## CAPACITANCE RANGE

Case sizes 0805 to 2220 are available in both X7R and COG/NPO dielectrics with capacitances of up to 120nF. The capacitance ranges are divided into four groups, which are based on the voltage coefficient of capacitance, COG/NPO, which has negligible capacitance shift with applied voltage, and three subgroups of X7R. Type A with  $\pm 30\%$  maximum capacitance shift 0V-240V, Type B with  $+30\%$  to  $-50\%$  maximum capacitance shift 0V-240V and Type C with  $+30\%$  to  $-80\%$  maximum capacitance shift 0V to 240V.

## 250VAC RATED 50/60HZ AC CAPACITORS — MINIMUM/MAXIMUM CAPACITANCE VALUES

| Chip size                | 0805        | 1206        | 1210        | 1808        | 1812        | 2220        |
|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| COG/NPO                  | 1.0pF-470pF | 1.0pF-1.2nF | 4.7pF-2.2nF | 4.7pF-2.2nF | 10pF-5.6nF  | 10pF - 10nF |
| X7R A<br>$\pm 30\%$      | 560pF-1.5nF | 1.5nF-10nF  | 2.7nF-22nF  | 2.7nF-22nF  | 6.8nF-56nF  | 12nF-120nF  |
| X7R B<br>$+30\%$ $-50\%$ | 1.8nF-3.3nF | 12nF        | 27nF        | 27nF        | 68nF-82nF   | -           |
| X7R C<br>$+30\%$ $-80\%$ | 3.9nF-10nF  | 15nF-47nF   | 33nF-100nF  | 33nF-100nF  | 100nF-120nF | -           |

Note: X7R A) has a VCC of  $\pm 30\%$  over 0 to 240Vac 60Hz


X7R B) has a VCC of  $+30\%$  to  $-50\%$  over 0 to 240Vac 60Hz

X7R C) has a VCC of  $+30\%$  to  $-80\%$  over 0 to 240Vac 60Hz

Measurement conditions described in Knowles Application Notes AN0033. Visit [knowlescapacitors.com](http://knowlescapacitors.com) for further details.

## ORDERING INFORMATION — 250VAC RATED 50/60HZ AC CAPACITORS

| 1812   | Y  | A25                  | 0103  | K  | J   | T  |
|--|--|----------------------|---|--|---|--|
| Chip size                                    | Termination  | Voltage              | Capacitance in picofarads (pF)  | Capacitance tolerance  | Dielectric codes                            | Packaging  |
| 0805<br>1206<br>1210<br>1808<br>1812<br>2220 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating).<br>RoHS compliant.<br>J = Nickel barrier (100% matte tin plating).<br>RoHS compliant.<br>Lead free. | A25 = 250Vac<br>60Hz | <10pF Insert a P for the decimal point, e.g., P300 = 0.3pF, 8P20 = 8.2pF.<br><br>≥10pF 1st digit is 0. 2nd and 3rd digits are significant figures of capacitance code. The 4th digit is number of zeros following e.g., 0103 = 10nF | <10pF<br>B = $\pm 0.1\text{pF}$<br>C = $\pm 0.25\text{pF}$<br>D = $\pm 0.5\text{pF}$<br><br>≥10pF<br>F = $\pm 1\%$<br>G = $\pm 2\%$<br>J = $\pm 5\%$<br>K = $\pm 10\%$<br>M = $\pm 20\%$ | C = COG/NPO<br>J = X7R (BME)<br><br>X = X7R | T = 178mm (7") reel<br><br>R = 330mm (13") reel<br><br>B = Bulk pack — tubs or trays |

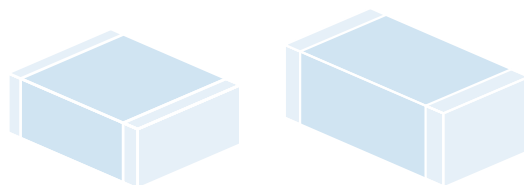

# Safety Certified AC Capacitors



Knowles Safety Certified capacitors comply with international UL and TÜV specifications, offering designers the option of using a surface mount ceramic multilayer capacitor to replace leaded film types.

Offering the benefits of simple pick-and-place assembly, reduced board space required and a lower profile, they are also available as a FlexiCap™ version to reduce the risk of mechanical cracking.

Our high voltage expertise allows us to offer capacitance ranges that are among the highest in the market for selected case sizes.

Applications include: modems and other telecoms equipment, AC/DC power supplies, power distribution switchgear, automotive applications, and where lightning strikes or other voltage transients represent a threat to electronic equipment.



- Surface mount multilayer ceramic capacitors
- Case sizes 1808, 1812, 2211, 2215 and 2220
- Reduced board area and height restrictions
- Meet Class Y2, X1 and X2 requirements
- Reduced assembly costs over conventional through hole components
- Approved by UL and TÜV
- FlexiCap™ polymer termination option available on all sizes

## OVERVIEW OF SAFETY CAPACITOR CLASSES

| Class | Rated Voltage | Impulse Voltage | Insulation Bridging     | May be used in Primary Circuit |
|-------|---------------|-----------------|-------------------------|--------------------------------|
| Y1    | 250Vac        | 8000V           | Double or Reinforced    | Line to Protective Earth       |
| Y2    | 250Vac        | 5000V           | Basic or Supplementary* | Line to Protective Earth       |
| Y3    | 250Vac        | None            | Basic or Supplementary* | -                              |
| Y4    | 150Vac        | 2500V           | Basic or Supplementary* | Line to Protective Earth       |
| X1    | 250Vac        | 4000V           | -                       | Line to Line                   |
| X2    | 250Vac        | 2500V           | -                       | Line to Line                   |
| X3    | 250Vac        | None            | -                       | Line to Line                   |

Note: \* 2 x Y2 or Y4 rated may bridge double or reinforced insulation when used in series.

## KNOWLES' SAFETY CERTIFIED AC CAPACITOR RANGES

Knowles offers two Safety Certified capacitor ranges:

- Enhanced 250Vac and 305Vac — our latest range, recommended for new designs
- Legacy 250Vac — our original range, for existing applications

These ranges are covered on the following pages.



# Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



Our new range of Enhanced Safety Certified capacitors offers significant advantages over other safety certified MLCC ranges, including:

- 250Vac class Y2 ranges
- 305Vac class X1 and X2 ranges
- All ranges have a safety certified dc voltage rating (unique in the industry)
- Most ranges are certified as humidity robustness grade III (unique in the industry)

- Approved for mains voltages up to 250Vac 50/60Hz (class Y2) and 305Vac 50/60Hz (classes X1, X2)
- SYX range with DWV withstand to 4kVdc/3kVac – suitable for EV battery systems with high voltage test demands
- SYS range with reduced creepage class Y2 (250Vac)/X1 (305Vac) parts, offering a smaller part for use in equipment within the scope of IEC62368
- Certification specifications IEC/EN60384-14:2013+A1, UL60384-14 and CAN/CSA E60384-14:1
- CTI  $\geq$  600

## SYX/UYX FAMILY – Y2 (250VAC)/X1 (305VAC), 5KV IMPULSE

The Knowles SYX family offers guaranteed 4mm creepage class Y2/X1 safety capacitors, including humidity robustness grade III, 5kV impulse and a 1kVdc rating approved by TÜV and UL.

In addition, all components are 100% DWV tested to 4kVdc, and AQL tested to 4kVdc and 3kVac for 60s. This makes the SYX range ideal for use in high voltage battery systems within electric vehicles.

Unmarked components (UYX suffix) can be offered a 2.5kVdc rating and are designed to comply with, but are not approved to, EN60384-14.

| Dielectric      | Approval Body | 1808          | 1812          | 2211          | 2215          | 2220          |
|-----------------|---------------|---------------|---------------|---------------|---------------|---------------|
| COG/NPO (1B)    | TÜV, UL       | 5.6pF - 220pF | 5.6pF - 820pF | 4.7pF - 1nF   | 820pF - 1nF   | -             |
| X7R (2R1)       | TÜV, UL       | 82pF - 1.8nF  | 100pF - 4.7nF | 100pF - 3.9nF | 2.7nF - 6.8nF | 150pF - 6.8nF |
| Max. Thickness* |               | 2.0mm         | 2.8mm         | 2.8mm         | 2.8mm         | 2.54mm        |

Notes: Blue Background = AEC-Q200.

\* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.



# Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



CONTINUED

## SYS/UYS FAMILY – Y2 (250VAC)/X1 (305VAC), 5KV IMPULSE

The Knowles SYS family offers class Y2/X1 safety capacitors, including humidity robustness grade III, 5kV impulse and a 1kVdc rating, approved by TÜV and UL for use in machinery within the scope of IEC 62368. Unmarked components (UYS suffix) can be offered with a 2500Vdc rating and are designed to comply with, but are not approved to, EN60384-14.

SYS and UYS components have a creepage <4mm, and as a result, their safety certifications are only valid for applications within the scope of IEC 62368. Ref: EN60384-14, clause 4.8.1.3.

| Dielectric      | Approval Body | 1808          | 1812          |
|-----------------|---------------|---------------|---------------|
| COG/NP0 (1B)    | TÜV, UL       | 5.6pF - 220pF | 5.6pF - 680pF |
| X7R (2R1)       | TÜV, UL       | 82pF - 1.8nF  | 100pF - 3.9nF |
| Max. Thickness* |               | 2.0mm         | 2.8mm         |

Notes: Blue Background = AEC-Q200.

\* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.

## S3X/U3X FAMILY – X2 (305VAC) 2.5KV IMPULSE

The Knowles S3X family offers class 305Vac X2 safety capacitors, 2.5kV impulse and a 1kVdc rating, approved by TÜV and UL.

Unmarked components (U3X suffix) can be offered with a 1.5kVdc rating and are designed to comply with, but are not approved to, EN60384-14.

| Dielectric      | Approval Body | 2220        |
|-----------------|---------------|-------------|
| COG/NP0 (1B)    | TÜV, UL       | -           |
| X7R (2R1)       | TÜV, UL       | 10nF - 56nF |
| Max. Thickness* |               | 4.5mm       |

Notes: Blue Background = AEC-Q200.

\* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.

## S2X/U2X FAMILY – X2 (250VAC), 2.5KV IMPULSE

The Knowles S2X family offers class 250Vac X2 safety capacitors, including humidity robustness grade III, 2.5kV impulse and a 1kVdc rating, approved by TÜV and UL.

Unmarked components (U2X suffix) can be offered with a 2.5kVdc rating and are designed to comply with, but are not approved to, EN60384-14.

| Dielectric      | Approval Body | 1808       |
|-----------------|---------------|------------|
| COG/NP0 (1B)    | TÜV, UL       | 10pF - 1nF |
| X7R (2R1)       | TÜV, UL       | -          |
| Max. Thickness* |               | 2.0mm      |

Notes: Blue Background = AEC-Q200.

\* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.



# Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



CONTINUED

## CLASSIFICATION AND APPROVAL SPECIFICATION

| Chip Size | Suffix Code | Dielectric   | Cap Range      | Classification  | Approval Specification                                 | Approval Body | AEC-Q200               |
|-----------|-------------|--------------|----------------|---|--|---------------|------------------------|
| 1808      | SYX         | COG/NP0 (1B) | 5.6pF to 220pF | Y2 (250Vac) + X1 (305Vac)<br>UL/cUL FOWX2 + FOWX8   | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
|           |             | X7R (2R1)    | 82pF to 1.8nF  |   |  |               |                        |
| 1808      | SYS         | COG/NP0 (1B) | 5.6pF to 220pF | Y2 (250Vac) + X1 (305Vac)<br>for use in equipment within the spec of IEC62368<br>UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
|           |             | X7R (2R1)    | 82pF to 1.8nF  |   |  |               |                        |
| 1808      | S2X         | COG/NP0 (1B) | 10pF to 1.0nF  | X2 (250Vac)<br>UL/cUL FOWX2 + FOWX8   | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
| 1812      | SYX         | COG/NP0 (1B) | 5.6pF to 820pF | Y2 (250Vac) + X1 (305Vac)<br>UL/cUL FOWX2 + FOWX8   | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
|           |             | X7R (2R1)    | 100pF to 4.7nF |   |  |               |                        |
| 1812      | SYS         | COG/NP0 (1B) | 5.6pF to 680pF | Y2 (250Vac) + X1 (305Vac)<br>for use in equipment within the spec of IEC62368<br>UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
|           |             | X7R (2R1)    | 100pF to 3.9nF |   |  |               |                        |
| 2211      | SYX         | COG/NP0 (1B) | 4.7pF to 1nF   | Y2 (250Vac) + X1 (305Vac)<br>UL/cUL FOWX2 + FOWX8   | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
|           |             | X7R (2R1)    | 100pF to 3.9nF |   |  |               |                        |
| 2215      | SYX         | COG/NP0 (1B) | 820pF to 1nF   | Y2 (250Vac) + X1 (305Vac)<br>UL/cUL FOWX2 + FOWX8   | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
|           |             | X7R (2R1)    | 2.7nF to 6.8nF |   |  |               |                        |
| 2220      | SYX         | X7R (2R1)    | 150pF to 6.8nF | Y2 (250Vac) + X1 (305Vac)<br>UL/cUL FOWX2 + FOWX8   | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |
| 2220      | S3X         | X7R (2R1)    | 10nF to 56nF   | X2 (305Vac)<br>UL/cUL FOWX2 + FOWX8   | IEC/EN60384-14:2013+A1:2016<br>UL/CAN/CSA60384-14:2014 | TÜV<br>UL     | TÜV & UL<br>FULL RANGE |

## DIMENSIONS

| Chip Size | Suffix Code | Length L1 mm (in)           | Width (W) mm (in)           | Maximum Thickness T* mm (in)                           | Termination Bands L2, L3 mm (in) | Creepage L4 mm (in) |
|-----------|-------------|-----------------------------|-----------------------------|--|----------------------------------|---------------------|
| 1808      | SYX/UYX     | 4.95 ± 0.35 (0.195 ± 0.014) | 2.00 ± 0.30 (0.08 ± 0.012)  | 1.50 (0.06), 2.00 (0.08)                               | 0.35 – 0.80 (0.014 – 0.030)      | ≥4 (≥0.0158)        |
|           | SYS/UYX     | 4.80 ± 0.35 (0.189 ± 0.014) | 2.00 ± 0.30 (0.08 ± 0.012)  | 1.50 (0.06), 2.00 (0.08)                               | 0.35 – 0.80 (0.014 – 0.030)      | ≥3.5 (≥0.0138)      |
|           | S2X/U2X     | 4.50 ± 0.35 (0.180 ± 0.014) | 2.00 ± 0.30 (0.08 ± 0.012)  | 1.50 (0.06), 2.00 (0.08)                               | 0.50 – 0.80 (0.020 – 0.030)      | ≥3 (≥0.118)         |
| 1812      | SYX/UYX     | 4.95 ± 0.35 (0.195 ± 0.014) | 3.20 ± 0.30 (0.126 ± 0.012) | 1.50 (0.06), 2.00 (0.08),<br>2.54 (0.10), 2.80 (0.11)  | 0.35 – 0.80 (0.014 – 0.030)      | ≥4 (≥0.0158)        |
|           | SYS/UYX     | 4.80 ± 0.35 (0.189 ± 0.014) | 3.20 ± 0.30 (0.126 ± 0.012) | 1.50 (0.06), 2.00 (0.08),<br>2.54 (0.10), 2.80 (0.11)  | 0.35 – 0.80 (0.014 – 0.030)      | ≥3.5 (≥0.0138)      |
| 2211      | SYX/UYX     | 5.70 ± 0.40 (0.225 ± 0.016) | 2.79 ± 0.30 (0.11 ± 0.012)  | 1.50 (0.06), 2.00 (0.08),<br>2.54 (0.10), 2.80 (0.11)  | 0.50 – 0.80 (0.020 – 0.030)      | ≥4 (≥0.0158)        |
| 2215      | SYX/UYX     | 5.70 ± 0.40 (0.225 ± 0.016) | 3.81 ± 0.35 (0.35 ± 0.02)   | 2.00 (0.08), 2.54 (0.10),<br>2.80 (0.11)               | 0.50 – 0.80 (0.020 – 0.030)      | ≥4 (≥0.0158)        |
| 2220      | SYX/UYX     | 5.70 ± 0.40 (0.225 ± 0.016) | 5.00 ± 0.40 (0.197 ± 0.016) | 2.00 (0.08), 2.54 (0.10)                               | 0.25 – 1.00 (0.010 – 0.040)      | ≥4 (≥0.0158)        |
|           | S3X/U3X     | 5.70 ± 0.40 (0.225 ± 0.016) | 5.00 ± 0.40 (0.197 ± 0.016) | 2.54 (0.1), 2.80 (0.11),<br>3.25 (0.128), 4.50 (0.177) | 0.25 – 1.00 (0.010 – 0.040)      | ≥4 (≥0.0158)        |



\*Maximum part thickness will be one of the stated values, depending on capacitance requested. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.



# Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



## ORDERING INFORMATION – SYX/UYX FAMILY

| 1808                                 | J  | A25          | 0102   | K  | J  | T   | SYX   |
|--------------------------------------|--|--------------|--|--|--|---|---|
| Chip Size                            | Termination  | Voltage      | Capacitance in Picofarads (pF)   | Capacitance Tolerance  | Dielectric Codes   | Packaging   | Suffix Code   |
| 1808<br>1812<br>2211<br>2215<br>2220 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.*<br><br>Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following. Example: 0102 = 1nF | <10pF<br>B = ±0.10pF<br>C = ±0.25pF<br>D = ±0.50pF<br><br>≥10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20% | K = COG/NP0 (1B) to AEC-Q200<br>S = X7R (2R1) to AEC-Q200<br><br>G = COG/NP0 (1B)<br>J = X7R (2R1) | T = 178mm (7") reel<br><br>R = 330mm (13") reel<br><br>B = Bulk pack – tubs or tray | SYX = Y2 (250Vac)/ X1 (305Vac) Marked + Approved<br><br>UYX = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200. \*J termination is available for dielectric codes K, G and J only.

## ORDERING INFORMATION – SYS/UYX FAMILY

| 1808             | J  | A25          | 0102  | G  | J  | T  | SYS   |
|------------------|--|--------------|---|--|--|--|---|
| Chip Size        | Termination  | Voltage      | Capacitance in Picofarads (pF)  | Capacitance Tolerance  | Dielectric Codes   | Packaging  | Suffix Code   |
| 1808<br><br>1812 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.*<br><br>Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following.<br><br>Example: 0102 = 1nF | <10pF<br>B = ±0.10pF<br>C = ±0.25pF<br>D = ±0.50pF<br><br>≥10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20% | K = COG/NP0 (1B) to AEC-Q200<br><br>S = X7R (2R1) to AEC-Q200<br><br>G = COG/NP0 (1B)<br><br>J = X7R (2R1) | T = 178mm (7") reel<br><br>R = 330mm (13") reel<br><br>B = Bulk pack – tubs or trays | SYS = Y2 (250Vac)/ X1 (305Vac) Marked + Approved<br><br>UYX = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200. \*J termination is available for dielectric codes K, G and J only.

## ORDERING INFORMATION – S3X/U3X FAMILY

| 2220      | Y  | A30          | 0563  | K                               | S  | T  | S3X  |
|-----------|--|--------------|---|---------------------------------|--|--|--|
| Chip Size | Termination  | Voltage      | Capacitance in Picofarads (pF)  | Capacitance Tolerance           | Dielectric Codes                               | Packaging  | Suffix Code  |
| 2220      | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.*<br><br>Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A30 = 305Vac | First digit is 0. Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following. Example: 0563 = 56nF | J = ±5%<br>K = ±10%<br>M = ±20% | S = X7R (2R1) to AEC-Q200<br><br>J = X7R (2R1) | T = 178mm (7") reel<br><br>R = 330mm (13") reel<br><br>B = Bulk pack – tubs or trays | S3X = X2 (305Vac) Marked + Approved<br><br>U3X = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200. \*J termination is available for dielectric code J only.

## ORDERING INFORMATION – S2X/U2X FAMILY

| 1808      | J   | A25          | 0102   | G  | J  | T  | S2X  |
|-----------|---|--------------|--|--|--|--|--|
| Chip Size | Termination   | Voltage      | Capacitance in Picofarads (pF)   | Capacitance Tolerance  | Dielectric Codes                                     | Packaging  | Suffix Code  |
| 1808      | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br><br>Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following. Example: 0102 = 1nF | <10pF<br>B = ±0.10pF<br>C = ±0.25pF<br>D = ±0.50pF<br><br>≥10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20% | K = COG/NP0 (1B) to AEC-Q200<br><br>G = COG/NP0 (1B) | T = 178mm (7") reel<br><br>R = 330mm (13") reel<br><br>B = Bulk pack – tubs or trays | S2X = X2 (250Vac) Marked + Approved<br><br>U2X = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200.





# Legacy 250Vac Safety Certified AC Capacitors



Knowles' original 250Vac safety certified capacitors remain available in our Legacy range to support existing customer applications.

For new equipment designs, we recommend our Enhanced 250Vac and 305Vac Safety Certified AC Capacitors range (see page 66).



- Approved for mains voltages up to 250Vac
- Smaller sizes suitable for use in equipment certified to EN60950
- Certification specifications for larger sizes include: IEC/EN60384-14, UL/CSA60950 and UL60384-14

## 250VAC SAFETY CERTIFIED CAPACITORS

| Dielectric     | Approval Body | X1 PY2        |               | X2 SP         | Y2/X1 SP      |               | Y2/X1 B16/M16† | X2 B17                              |
|----------------|---------------|---------------|---------------|---------------|---------------|---------------|----------------|-------------------------------------|
|                |               | 1808          | 1812          | 1808          | 2211          | 2215          | 2220           | 2220                                |
| COG/NPO (1B)   | TÜV, UL       | 4.7pF - 390pF | 4.7pF - 390pF | 4.7pF - 1.5nF | 4.7pF - 1nF   | 820pF - 1nF   | -              | -                                   |
| X7R (2R1)      | TÜV, UL       | 150pF - 1nF   | 150pF - 2.2nF | 150pF - 4.7nF | 100pF - 3.9nF | 2.7nF - 3.9nF | 150pF - 10nF   | 150pF - 22nF<br>(TÜV approval only) |
| Max. Thickness |               | 2.0mm         | 2.5mm         | 2.0mm         | 2.54mm        | 2.54mm        | 2.54mm*        | 2.54mm**                            |

Notes: Blue Background = AEC-Q200.

\* Y2/X1 (B16 and M16) 2220 parts with values >5.6nF have a maximum thickness of 4.5mm.

\*\* X2 (B17) 2220 parts with values >10nF have a maximum thickness of 4.0mm.

†M16 parts have an open mode construction to reduce the risk of short-circuit failure in the event of a mechanical crack developing. For further information on the design of open mode parts, refer to page 58 of this catalog.



# Legacy 250Vac Safety Certified AC Capacitors



## CLASSIFICATION AND APPROVAL SPECIFICATION

| Chip Size | Suffix Code                          | Dielectric   | Cap Range      | Classification        | Approval Specification   | Approval Body | AEC-Q200                                      |
|-----------|--------------------------------------|--------------|----------------|-----------------------|--|---------------|---|
| 1808      | SP <sup>1</sup>                      | COG/NPO (1B) | 4.7pF to 1.5nF | X2<br>NWGQ2, NWGQ8    | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE                        |
| 1808      | SP <sup>1</sup>                      | X7R (2R1)    | 150pF to 4.7nF | X2<br>NWGQ2, NWGQ8    | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE<br>"Y" TERM ONLY       |
| 1808      | PY2 <sup>1</sup>                     | COG/NPO (1B) | 4.7pF to 390pF | X1<br>NWGQ2, NWGQ8    | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE                        |
| 1808      | PY2 <sup>1</sup>                     | X7R (2R1)    | 150pF to 1nF   | X1<br>NWGQ2, NWGQ8    | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>1nF max.<br>"Y" TERM ONLY         |
| 1812      | PY2 <sup>1</sup>                     | COG/NPO (1B) | 4.7pF to 390pF | X1<br>NWGQ2, NWGQ8    | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE                        |
| 1812      | PY2 <sup>1</sup>                     | X7R (2R1)    | 150pF to 2.2nF | X1<br>NWGQ2, NWGQ8    | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>2.2nF max.<br>"Y" TERM ONLY       |
| 2211      | SP <sup>2</sup>                      | COG/NPO (1B) | 4.7pF to 1nF   | Y2/X1<br>NWGQ2, NWGQ8 | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE                        |
| 2211      | SP <sup>2</sup>                      | X7R (2R1)    | 100pF to 3.9nF | Y2/X1<br>NWGQ2, NWGQ8 | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE<br>"Y" & "H" TERM ONLY |
| 2215      | SP <sup>2</sup>                      | COG/NPO (1B) | 820pF to 1nF   | Y2/X1<br>NWGQ2, NWGQ8 | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE                        |
| 2215      | SP <sup>2</sup>                      | X7R (2R1)    | 2.7nF to 3.9nF | Y2/X1<br>NWGQ2, NWGQ8 | IEC60384-14<br>EN60384-14<br>UL-60950-1, 2nd Ed<br>CSA 60950-1-07 2nd Ed | TÜV<br>UL     | TÜV & UL<br>FULL RANGE<br>"Y" & "H" TERM ONLY |
| 2220      | B16 <sup>3</sup> or M16 <sup>3</sup> | X7R (2R1)    | 150pF to 10nF  | Y2/X1<br>FOWX2, FOWX8 | IEC60384-14<br>EN60384-14<br>UL-60384-14:2010<br>CSA E60384-14:09        | TÜV<br>UL     | TÜV & UL<br>FULL RANGE<br>"Y" & "H" TERM ONLY |
| 2220      | B17 <sup>2</sup>                     | X7R (2R1)    | 150pF to 22nF  | X2                    | IEC60384-14<br>EN60384-14  | TÜV           | TÜV ONLY<br>22nF max.<br>"Y" & "H" TERM ONLY  |

**Notes: Termination availability**

(1) J and Y terminations only.

(2) J, Y, A and H terminations available.

(3) J, Y, A and H terminations available on values ≤5.6nF. Y and H terminations on values >5.6nF.

PY2 Unmarked capacitors also available as released in accordance with approval specifications. Suffix Code SY2 applies.

SP Unmarked capacitors also available as released in accordance with approval specifications. Suffix Code SPU applies.

B16 Unmarked capacitors with a dual AC/DC rating are also available as released in accordance with approval specifications. Suffix Code U16 applies.

B17 Unmarked capacitors with a dual AC/DC rating are also available as released in accordance with approval specifications. Suffix Code U17 applies.



# Legacy 250Vac Safety Certified AC Capacitors



## DIMENSIONS

| Chip Size | Length L1 mm (in)             | Width (W) mm (in)           | Maximum Thickness T mm (in) | Termination Bands L2, L3 mm (in) | Creepage L4 mm (in) |
|-----------|-------------------------------|-----------------------------|-----------------------------|----------------------------------|---------------------|
| 1808      | 4.50 ± 0.35 (0.180 ± 0.014)   | 2.00 ± 0.30 (0.08 ± 0.012)  | 2.0 (0.08)                  | 0.50 – 0.80 (0.020 - 0.030)      | ≥3.0 (≥0.118)       |
| 1812      | 4.50 ± 0.30 (0.180 ± 0.012)   | 3.20 ± 0.20 (0.126 ± 0.012) | 2.5 (0.1)                   | 0.50 – 0.80 (0.020 - 0.030)      | ≥3.0 (≥0.118)       |
| 2211      | 5.70 ± 0.40 (0.225 ± 0.016)   | 2.79 ± 0.30 (0.11 ± 0.012)  | 2.54 (0.1)                  | 0.50 – 0.80 (0.020 - 0.030)      | ≥4.0 (≥0.158)       |
| 2215      | 5.70 ± 0.40 (0.225 ± 0.016)   | 3.81 ± 0.35 (0.35 ± 0.02)   | 2.54 (0.1)                  | 0.50 – 0.80 (0.020 - 0.030)      | ≥4 (≥0.158)         |
| 2220      | 5.70 ± 0.40* (0.225 ± 0.016)* | 5.00 ± 0.40 (0.197 ± 0.016) | 2.54** (0.1)**              | 0.25 – 1.00 (0.010 - 0.040)      | ≥4 (≥0.158)         |




\*For 2220 B16 parts >5.6nF, length L1 = 5.8 ± 0.40 (0.228 ± 0.016).

\*\*For 2220 B16 parts >5.6nF, max thickness (T) = 4.50 (0.177). For 2220 B17 parts >10nF, max thickness (T) = 4.0 (0.157).

## ORDERING INFORMATION — SPU/SP RANGES

| 1808      | J   | A25          | 0102   | J   | C  | T  | SP   |
|-----------|---|--------------|--|---|--|--|--|
| Chip Size | Termination   | Voltage      | Capacitance in PicoFarads (pF)   | Capacitance Tolerance   | Dielectric Codes   | Packaging  | Suffix Code  |
| 1808      | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br>Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0.<br>Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following.<br><br>Example: 0102 = 1nF | <10pF<br>B = ±0.10pF<br>C = ±0.25pF<br>D = ±0.50pF<br>≥ 10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20%<br><br>Note: X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NP0 (1B) to AEC-Q200<br>E = X7R (2R1) to AEC-Q200<br><br>C = COG/NP0 (1B)<br>X = X7R (2R1) | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays | SP = Surge protection capacitors (marked + approved)<br><br>SPU = Surge protection capacitors (un-marked parts are in accordance with but not certified) |
| 2211      | A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.   |              |  |   |  |  |  |
| 2215      | H = FlexiCap™ termination base with nickel barrier (Tin/lead plating with minimum 10% lead). Not RoHS compliant.  |              |  |   |  |  |  |


Note: J and A terminations are not available for dielectric code E. A and H terminations are available for case sizes 2211/2215 only.



## ORDERING INFORMATION — PY2/SY2 RANGES

| 1808      | J   | A25          | 0102   | J   | X  | T  | PY2   |
|-----------|---|--------------|--|---|--|--|---|
| Chip Size | Termination   | Voltage      | Capacitance in PicoFarads (pF)   | Capacitance Tolerance   | Dielectric Codes   | Packaging  | Suffix Code   |
| 1808      | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br>Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0.<br>Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following.<br><br>Example: 0102 = 1nF | <10pF<br>B = ±0.10pF<br>C = ±0.25pF<br>D = ±0.50pF<br>> 10pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20%<br><br>Note: X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NP0 (1B) to AEC-Q200<br>E = X7R (2R1) to AEC-Q200<br><br>C = COG/NP0 (1B)<br>X = X7R (2R1) | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays | PY2 = Safety tested Surge protection capacitors (marked + approved)<br><br>SY2 = Surge protection capacitors (un-marked parts are in accordance with but not certified) |
| 1812      |   |              |  |   |  |  |   |

Note: J termination is not available for dielectric code E.



## ORDERING INFORMATION — B16/B17/M16 RANGES

| 2220      | J  | A25          | 0102   | J                               | X  | T  | B16   |
|-----------|--|--------------|--|---------------------------------|--|--|---|
| Chip Size | Termination  | Voltage      | Capacitance in PicoFarads (pF)   | Capacitance Tolerance           | Dielectric Codes   | Packaging  | Suffix Code   |
| 2220      | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br>Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant.<br>A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.<br>H = FlexiCap™ termination base with nickel barrier (Tin/lead plating with minimum 10% lead). Not RoHS compliant. | A25 = 250Vac | First digit is 0.<br>Second and third digits are significant figures of capacitance code.<br><br>The fourth digit is number of zeros following.<br><br>Example: 0102 = 1nF | J = ±5%<br>K = ±10%<br>M = ±20% | E = X7R (2R1) to AEC-Q200 - original<br>S = X7R (2R1) to AEC-Q200 - recommended<br><br>X = X7R(2R1) - original<br>J = X7R(2R1) - recommended | T = 178mm (7") reel 1000 pieces<br>R = 330mm (13") reel 4000 pieces<br><br>B = Bulk pack — tubs or trays | B16 = Type A: X1/Y2<br>B17 = Type B: X2<br><br>U16 = Surge protection Unmarked Type A X1/Y2 capacitors (with a dual AC/DC rating are in accordance with but not certified)<br><br>U17 = Surge protection Unmarked Type B X2 capacitors (with a dual AC/DC rating are in accordance with but not certified)<br><br>M16 = Type A: X1/Y2, open mode protected design |

Notes: J and A terminations are not available for dielectric codes E and S (all capacitance values), or for dielectric code X with suffix codes B16/U16 for capacitance values >5.6nF.

H termination is available for dielectric codes E and X only. Dielectric codes S and J are available for use with suffix codes B16, U16 and M16 only.



# Non-Magnetic Capacitors — High Q, COG/NPO, X5R and X7R — 16V to 7.2kV

MLC capacitors with silver/palladium (Ag/Pd) terminations have often been used in medical applications where non-magnetic components are required, for example in MRI equipment — however, conventional nickel barrier terminations are not suitable due to their magnetic properties. In addition, RoHS requirement to use lead-free solders would cause an increase in soldering temperatures and cause solder leaching problems for the Ag/Pd termination. This has meant alternatives have had to be found and one solution is to use a copper barrier instead of a nickel barrier, with a tin finish on top. This non-magnetic termination is offered with selected non-magnetic COG/NPO, High Q, X5R and X7R dielectrics, providing a fully non-magnetic component ( $\mu_r = 1.0000$ ).

To meet high temperature 260°C soldering reflow profiles as detailed in J-STD-020, COG/NPO dielectrics are supplied with sintered termination for optimized HighQ/low ESR performance, while X5R and X7R dielectrics are supplied with our FlexiCap™ termination to minimize risk of mechanical cracking.

Available in chip or ribbon leaded format for certain case sizes (consult sales office).

## HIGH Q, COG/NPO (PME Q RANGE) — MINIMUM/MAXIMUM CAPACITANCE VALUES

| Chip Size        | 0402   | 0603  | 0505  | 0805  | 1206  | 1210  | 1808  | 1812  | 2220  |       |   |
|------------------|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|
| <b>Min Cap</b>   | 0.2pF  | 0.2pF | 0.2pF | 0.2pF | 0.5pF | 0.3pF | 1.0pF | 1.0pF | 2.0pF |       |   |
| <b>50V/63V</b>   | 22pF   | 100pF | 220pF | 470pF | 1.5nF | -     | -     | -     | -     |       |   |
| <b>100V</b>      | 15pF   | 68pF  | 150pF | 330pF | 1.0nF | 2.2nF | 2.2nF | 4.7nF | 10nF  |       |   |
| <b>150V</b>      | 10pF   | 47pF  | 100pF | 220pF | 680pF | 1.5nF | 1.5nF | 3.3nF | 6.8nF |       |   |
| <b>200V/250V</b> | 6.8pF  | 33pF  | 56pF  | 150pF | 470pF | 1.0nF | 1.0nF | 2.2nF | 4.7nF |       |   |
| <b>300V</b>      | -  | 27pF  | 47pF  | 120pF | 390pF | 820pF | 820pF | 1.8nF | 3.9nF |       |   |
| <b>500V</b>      | -  | -     | -     | 68pF  | 270pF | 680pF | 680pF | 1.5nF | 3.3nF |       |   |
| <b>630V</b>      | Min Capacitance Tolerance<br>±0.05pF (<4.7pF)<br>0.1pF (≥4.7pF & <10pF)<br>±1% (≥10pF) |       |       | -     | 150pF | 390pF | 390pF | 1.0nF | 2.2nF |       |   |
| <b>1000V</b>     |  |       |       | -     | 82pF  | 220pF | 220pF | 680pF | 1.5nF | -     |   |
| <b>2000V</b>     |  |       |       | -     | -     | 18pF  | 68pF  | 68pF  | 150pF | 470pF | - |
| <b>3000V</b>     |  |       |       | -     | -     | -     | -     | -     | 68pF  | 150pF | - |

## HIGH Q, COG/NPO (BME H RANGE) — MINIMUM/MAXIMUM CAPACITANCE VALUES

| Chip Size        | 0402   | 0603  | 0505  | 0805  | 1206  | 1210  | 1808  |
|------------------|--|-------|-------|-------|-------|-------|-------|
| <b>Min Cap</b>   | 0.2pF  | 0.2pF | 0.3pF | 0.2pF | 0.5pF | 0.3pF | 1.0pF |
| <b>50V/63V</b>   | 100pF  | 470pF | 1.0nF | 1.5nF | 6.8nF | 15nF  | 15nF  |
| <b>100V</b>      | 100pF  | 470pF | 560pF | 1.0nF | 2.7nF | 4.7nF | 4.7nF |
| <b>150V</b>      | 33pF   | 150pF | 270pF | 1.0nF | 2.2nF | 4.7nF | 4.7nF |
| <b>200V/250V</b> | 33pF   | 150pF | 270pF | 820pF | 2.2nF | 4.7nF | 4.7nF |
| <b>300V</b>      | -  | 150pF | 240pF | 430pF | 1.5nF | 1.8nF | 1.8nF |
| <b>500V</b>      | -  | 150pF | 240pF | 430pF | 1.5nF | 1.8nF | 1.8nF |
| <b>630V</b>      | Min Capacitance Tolerance<br>±0.05pF (<4.7pF)<br>0.1pF (≥4.7pF & <10pF)<br>±1% (≥10pF) |       |       | 47pF  | 560pF | 820pF | 820pF |
| <b>1000V</b>     |  |       |       | 47pF  | 560pF | 820pF | 820pF |
| <b>2000V</b>     |  |       |       | -     | 100pF | 270pF | 390pF |
| <b>3000V</b>     |  |       |       | -     | -     | -     | -     |

## X7R/X5R — MINIMUM/MAXIMUM CAPACITANCE VALUES

| Dielectric | Chip Size        | 0402  | 0603                             | 0805  | 1206  | 1210  | 1808  | 1812  | 2220  | 2225  |
|------------|------------------|-------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
|            | <b>Min Cap</b>   |       | 47pF                             | 100pF | 330pF | 680pF | 1.5nF | 2.2nF | 3.3nF | 6.8nF |
| <b>X5R</b> | <b>16V</b>       | 22nF  | 100nF                            | 330nF | 1.0µF | 1.5µF | 1.5µF | 3.3µF | 5.6µF | 6.8µF |
|            | <b>25V</b>       | 15nF  | 100nF                            | 330nF | 1.0µF | 1.2µF | 2.2µF | 4.7µF | 5.6µF | -     |
|            | <b>50V/63V</b>   | 10nF  | 100nF                            | 150nF | 470nF | 1.0µF | 1.5µF | 3.3µF | 3.3µF | -     |
|            | <b>100V</b>      | 4.7nF | 22nF                             | 100nF | 270nF | 560nF | 330nF | 1.0µF | 1.5µF | 1.5µF |
| <b>X7R</b> | <b>200V/250V</b> | 680pF | 5.6nF                            | 27nF  | 100nF | 220nF | 180nF | 470nF | 1.0µF | 1.0µF |
|            | <b>500V</b>      | -     | 1.5nF                            | 8.2nF | 33nF  | 100nF | 100nF | 270nF | 560nF | 680nF |
|            | <b>630V</b>      | -     | -                                | 4.7nF | 10nF  | 27nF  | 33nF  | 150nF | 330nF | 390nF |
|            | <b>1000V</b>     | -     | -                                | 3.3nF | 4.7nF | 15nF  | 18nF  | 56nF  | 120nF | 150nF |
|            | <b>1200V</b>     | -     | Min Capacitance Tolerance<br>±5% |       | 3.3nF | 10nF  | 10nF  | 33nF  | 82nF  | 100nF |
|            | <b>1500V</b>     | 2.7nF |                                  |       | 6.8nF | 6.8nF | 22nF  | 47nF  | 68nF  |       |
|            | <b>2000V</b>     | 2.2nF |                                  |       | 4.7nF | 4.7nF | 10nF  | 27nF  | 33nF  |       |
|            | <b>3000V</b>     | -     |                                  |       | -     | -     | -     | -     | -     |       |

## HIGH Q, COG/NPO HIGH POWER RF CAPACITORS — MINIMUM/MAXIMUM CAPACITANCE VALUES

A range of ultra-low loss High Q ceramic capacitors with COG/NPO characteristics suitable for high power applications where minimal power loss and very low self-heating is demanded.

Common applications include MRI body coils and wireless charging systems operating in the kHz and MHz frequencies.


Available in chip or ribbon leaded format.

| Chip Size          | 1111*   |       |       |       | 2225  |             | 4040  |              |
|--------------------|---|-------|-------|-------|-------|-------------|-------|--------------|
|                    | H   |       | Q     |       | Q     |             | Q     |              |
| Range              | Min   | Max   | Min   | Max   | Min   | Max         | Min   | Max          |
| <b>100V</b>        | 2.0nF   | 4.7nF | 1.6nF | 2.2nF | -     | -           | -     | -            |
| <b>150V</b>        | 2.0nF   | 4.7nF | 1.1nF | 1.5nF | -     | -           | -     | -            |
| <b>200V</b>        | 2.0nF   | 4.7nF | -     | -     | 6.2nF | 10nF        | 16nF  | 27nF         |
| <b>250V</b>        | 2.0nF   | 4.7nF | 750pF | 1.0nF | 6.2nF | 10nF        | 16nF  | 27nF         |
| <b>300V</b>        | 910pF   | 1.8nF | 620pF | 680pF | -     | -           | -     | -            |
| <b>500V</b>        | 910pF   | 1.8nF | 510pF | 560pF | 5.1nF | 5.6nF       | 13nF  | 15nF         |
| <b>630V</b>        | 910pF   | 1.8nF | 240pF | 470pF | 3.6nF | 4.7nF       | 11nF  | 12nF         |
| <b>1kV</b>         | 910pF   | 1.8nF | 110pF | 220pF | 1.1nF | 3.3nF       | 5.6nF | 10nF         |
| <b>1.5kV</b>       | 430pF   | 820pF | 75pF  | 100pF | -     | -           | -     | -            |
| <b>2kV</b>         | 1.0pF   | 390pF | 0.4pF | 68pF  | 510pF | 1.0nF       | 1.6nF | 5.1nF        |
| <b>3kV</b>         | -   | -     | -     | -     | 110pF | 470pF       | 910pF | 1.5nF        |
| <b>3.6kV</b>       | -   | -     | -     | -     | 1pF   | 47pF*/100pF | -     | -            |
| <b>4kV</b>         | *47pF max. for dual rated @2.5kVac 30MHz<br>**56pF max. for dual rated @5kVac 30MHz |       |       |       | -     | -           | 620pF | 820pF        |
| <b>5kV</b>         |   |       |       |       | -     | -           | 360pF | 560pF        |
| <b>6kV</b>         |   |       |       |       | -     | -           | 160pF | 330pF        |
| <b>7.0kV/7.2kV</b> |   |       |       |       | -     | -           | 1pF   | 56pF**/150pF |


\*Case size 1111 has thickness 2.0 ± 0.2mm (0.08 ± 0.008")

# Non-Magnetic Capacitors — High Q, COG/NP0, X5R and X7R — 16V to 7.2kV

**RIBBON LEADED** Silver plated copper ribbon attached with HMP solder — (MP greater than 260°C).

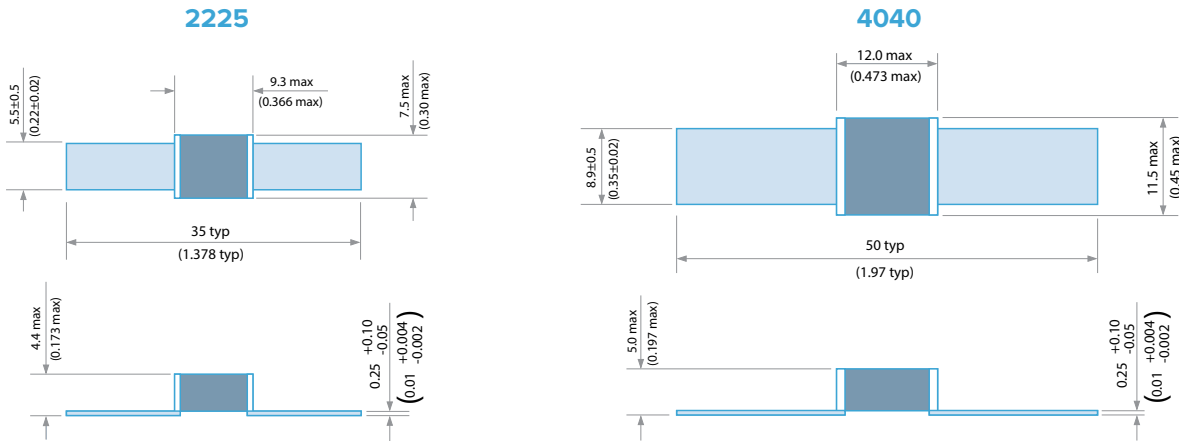

**SURFACE MOUNT** See page 23 for dimensions.

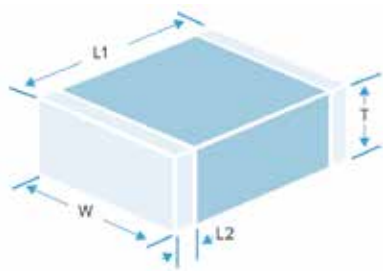

## ORDERING INFORMATION — SYFER NON-MAGNETIC CAPACITORS

| Chip size   | Termination or Coating   | Voltage           | Capacitance in picofarads (pF)   | Capacitance tolerance  | Dielectric   | Packing   | Lead Options                                       | Suffix code  |
|-------------|--|-------------------|--|--|--|---|--|--|
| 1206        | 2  | 500               | 0223   | J  | Q  | T   | -  | -  |
| 4040        | 2  | 7K0               | 0470   | G  | Q  | B   | -  | AF9  |
| 2225        | B  | 3K0               | 6P80   | G  | Q  | B   | R  | W221   |
| <b>0402</b> | <b>Termination (Chip)</b>  | <b>050</b> = 50V  | <10pF Insert a P for the decimal point, e.g., <b>2P20</b> = 2.2pF.   | <4.7pF<br>H = ±0.05pF<br>B = ±0.1pF<br>C = ±0.25pF<br>D = ±0.5pF | <b>Q</b> = COG - Hi Q/Low ESR (PME)<br><b>H</b> = COG - Hi Q/Low ESR (BME)<br><b>P</b> = X5R<br><b>X</b> = X7R (2R1) | <b>T</b> = 178mm (7") reel<br><b>R</b> = 330mm (13") reel<br><b>B</b> = Bulk pack — tubs or trays | <b>R</b> = Ribbon leaded<br><b>Blank</b> = SM chip | <b>W221</b> = Leaded<br><b>W211</b> = Leaded marked<br><b>AF9</b> = SM standard chip<br><b>AF9LM</b> = SM marked standard chip |
| <b>0603</b> | <b>2</b> = Sintered silver with copper barrier                         | <b>100</b> = 100V | >10pF, 1st digit is 0. 2nd and 3rd digits are significant figures of capacitance code. The 4th digit is number of zeros following e.g., <b>0470</b> = 47pF | ≥4.7pF ~ <10pF<br>B = ±0.1pF<br>C = ±0.25pF<br>D = ±0.5pF        |  |   |  |  |
| <b>0505</b> | <b>3</b> = FlexiCap™ with copper barrier                               | <b>1K0</b> = 1kV  |  |  |  |   |  |  |
| <b>0805</b> | <b>3</b> = FlexiCap™ with copper barrier                               | <b>2K0</b> = 2kV  |  |  |  |   |  |  |
| <b>1206</b> | <b>4</b> = Sintered silver with copper barrier                         | <b>3K0</b> = 3kV  |  |  |  |   |  |  |
| <b>1111</b> | <b>4</b> = Sintered silver with copper barrier                         | <b>4K0</b> = 4kV  |  |  |  |   |  |  |
| <b>1210</b> | <b>5</b> = FlexiCap™ base with copper barrier                          | <b>5K0</b> = 5kV  |  |  |  |   |  |  |
| <b>1808</b> | <b>5</b> = FlexiCap™ base with copper barrier                          | <b>6K0</b> = 6kV  |  |  |  |   |  |  |
| <b>1812</b> | <b>5</b> = FlexiCap™ base with copper barrier                          | <b>7K0</b> = 7kV  |  |  |  |   |  |  |
| <b>2220</b> | <b>F</b> = Palladium silver  |                   | Values <1pF in 0.1pF steps, above this values are E24 series   |  |  |   |  |  |
| <b>2225</b> | <b>Coating (Ribbon Leaded)</b>   |                   |  |  |  |   |  |  |
| <b>4040</b> | <b>B</b> = Uncoated<br><b>V</b> = Coated with modified silicone laquer |                   |  |  |  |   |  |  |

Note: Not all options in the above table are available for all parts. To identify the required part number, use the Part Builder application on the Knowles website.



# Non-Magnetic Capacitors, High Power RF — Porcelain High Q

Made from highly stable, low loss dielectric formulations, these traditional porcelain MLCs are known for their high RF power handling capability. Available in all industry common case sizes. The special silver-palladium termination and the proprietary ceramic formulations guarantee consistent non-magnetic performance. All MLCs in these series are RoHS compliant. Chips are available either with standard termination or can be fitted with ribbon leads, depending on your application.

## DESCRIPTION

- Porcelain Capacitors • Zero TC • Low Noise • Low ESR, High Q
- High Self-Resonance • Established Reliability
- Capacitance Range 0.1pF to 5.1nF

## FUNCTIONAL APPLICATIONS

- Impedance Matching • DC Blocking • Bypass • Coupling
- Tuning and Feedback



## HIGH POWER RF CAPACITORS — CF AND AH MATERIALS — MINIMUM/MAXIMUM CAPACITANCE VALUES — see ordering information

| Chip Size | C11 0505 |       | C17 1111 |       | C18 1111 |       | C22 2225 |       | C40 3838 |       |
|-----------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|
|           | Min.     | Max.  | Min.     | Max.  | Min.     | Max.  | Min.     | Max.  | Min.     | Max.  |
| 50V       | -        | -     | 680pF    | 1nF   | 680pF    | 1.0nF | -        | -     | -        | -     |
| 100V      | -        | -     | 510pF    | 620pF | 510pF    | 620pF | -        | -     | -        | -     |
| 200V      | 36pF     | 100pF | 220pF    | 470pF | 220pF    | 470pF | -        | -     | -        | -     |
| 250V      | 0.3pF    | 33pF  | -        | -     | -        | -     | -        | -     | -        | -     |
| 300V      | -        | -     | -        | -     | -        | -     | 2.0nF    | 2.7nF | -        | -     |
| 500V      | -        | -     | 110pF    | 200pF | -        | -     | 1.3nF    | 1.8nF | 2.4nF    | 5.1nF |
| 1kV       | -        | -     | 0.3pF    | 100pF | 110pF    | 200pF | 510pF    | 1.2nF | 750pF    | 2.2nF |
| 1.5kV     | -        | -     | -        | -     | -        | -     | 300pF    | 470pF | -        | -     |
| 2kV       | -        | -     | -        | -     | 0.3pF    | 100pF | -        | -     | -        | -     |
| 2.5kV     | -        | -     | -        | -     | -        | -     | 0.3pF    | 270pF | 430pF    | 680pF |
| 3.6kV     | -        | -     | -        | -     | -        | -     | -        | -     | 110pF    | 390pF |
| 7.2kV     | -        | -     | -        | -     | -        | -     | -        | -     | 0.3pF    | 100pF |

Note: Special capacitance values available upon request.

## ORDERING INFORMATION — NON-MAGNETIC CAPACITORS (PORCELAIN HIGH Q)

| C17       | CF                 | 470         | J         | 7            | W                    | A                          | X                          | O                                | B             |
|-----------|--------------------|-------------|-----------|--------------|----------------------|----------------------------|----------------------------|----------------------------------|---------------|
| Case size | Dielectric         | Capacitance | Tolerance | Voltage      | Termination          | Lead Option                | Test Level                 | Marking                          | Packaging     |
| C11 0505  | AH<br>+90±20ppm/°C | 0R3 0.3pF   | A ±0.05pF | 5 50V        | W Ag/Cu/Sn           | A Axial Ribbon             | X Commercial or Industrial | 0 No marking                     | B Bulk        |
| C17 1111  |                    | 100 10pF    | B ±0.1pF  | 1 100V       | P Pd/Ag              | N SM Chip                  | Y Reduced Visual           | 1 Single-side marked             | P Plastic Box |
| C18 1111  | 101 100pF          | C ±0.25pF   | 6 200V    | M Poly/Cu/Sn | 2 Double-side marked |                            |                            |                                  |               |
| C22 2225  | CF<br>0±15ppm/°C   | 102 1000pF  | D ±0.5pF  | 9 250V       |                      | 3 Large single-side marked | 3 Large single-side marked | T 7" Reel Horizontal Orientation |               |
| C40 3838  |                    |             | F ±1%     | 3 300V       |                      | 4 Large double-side marked | 4 Large double-side marked |                                  |               |
|           |                    |             | G ±2%     | 4 500V       |                      | 5 Vertical edge marked     | 5 Vertical edge marked     |                                  |               |
|           |                    |             | J ±5%     | 7 1kV        |                      | 9 Customer Specified       | 9 Customer Specified       |                                  |               |
|           |                    |             | K ±10%    | A 1.5kV      |                      |                            |                            |                                  |               |
|           |                    |             |           | G 2kV        |                      |                            |                            |                                  |               |
|           |                    |             |           | B 2.5kV      |                      |                            |                            |                                  |               |
|           |                    |             |           | D 3.6kV      |                      |                            |                            |                                  |               |
|           |                    |             |           | H 7.2kV      |                      |                            |                            |                                  |               |

Note: \*Available in chip or ribbon leaded format.

## REELED QUANTITIES

| Chip Size | 0402                                     | 0505  | 0603  | 0805  | 1206  | 1111/1210   | 1808  | 1812  | 2220  | 2225  |
|-----------|--|-------|-------|-------|-------|-------------|-------|-------|-------|-------|
| 7" Reel   | 10,000                                   | 2,500 | 4,000 | 3,000 | 2,500 | 1,000/2,000 | 1,500 | 500   | 500   | 500   |
| 13" Reel  | 13" reel quantities available on request |       |       |       |       |             | 6,000 | 2,000 | 2,000 | 2,000 |

Note: Other capacitance values may become available; please contact the Sales Office if you need values other than those shown in the above tables. For dimensions and soldering information, visit [knowlescapacitors.com](http://knowlescapacitors.com).




# Non-Magnetic Capacitors, High Power RF — Porcelain High Q


TYPICAL PERFORMANCE DATA —  
CHIP SIZE 0805 HIGH Q

TYPICAL PERFORMANCE DATA —  
CHIP SIZE 1111 HIGH Q


ESR vs. Frequency

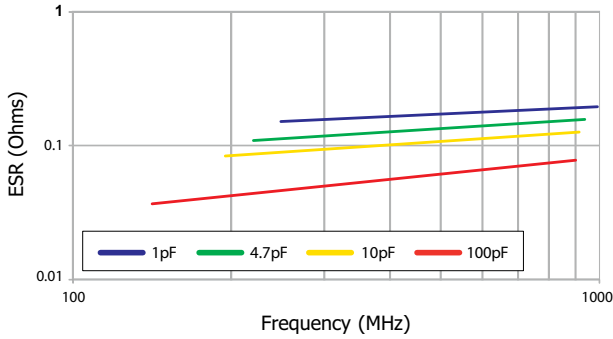


ESR vs. Frequency

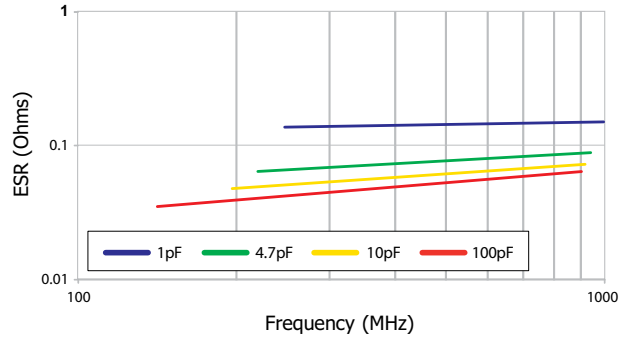


Q vs. Capacitance

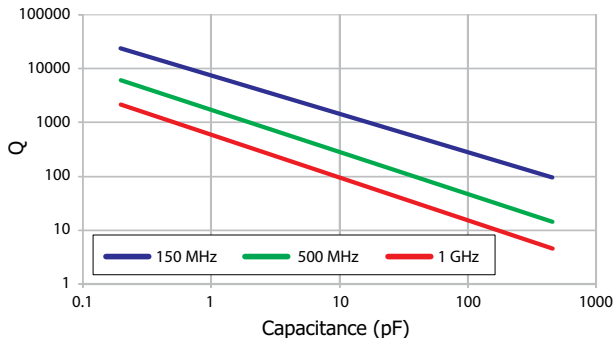


Q vs. Capacitance

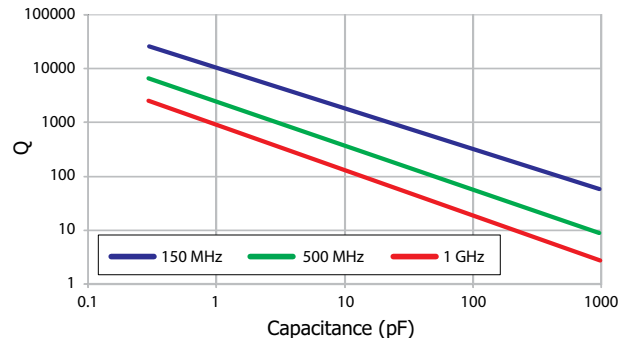


Resonant Frequency vs. Capacitance

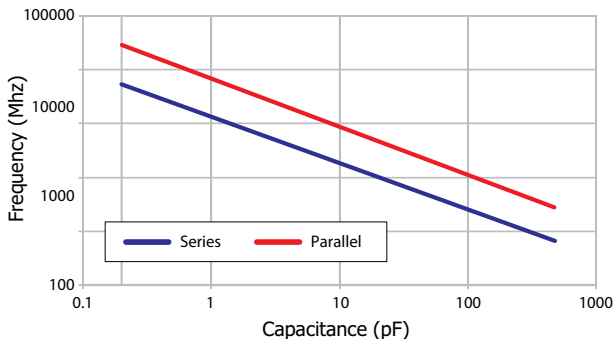

Resonant Frequency vs. Capacitance

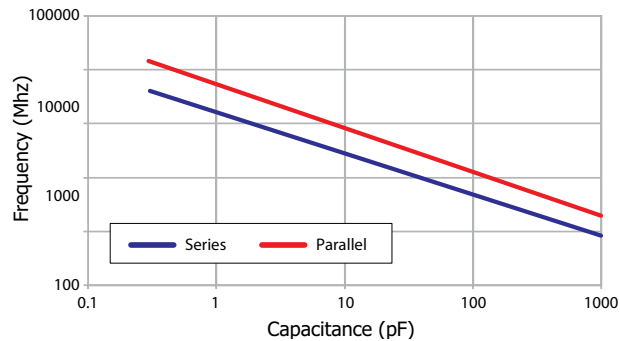

Typical ESR vs. Frequency

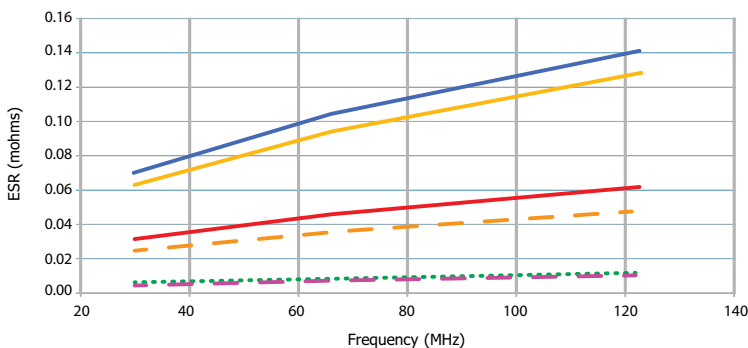

- 4040 56pF
- 4040 18pF
- ... 2225 2.2nF
- 2225 39pF
- 2225 10pF
- 4040 5.1nF

## ESR MEASUREMENT

All ESR figures are measured using a VNA and 2m copper resonant tube and extrapolating to 30MHz by ratio. Measured data can be supplied on request. Measurement of ESR can vary with test method and components should only be compared when tested back to back on the same equipment under controlled conditions.



# 115Vac 400Hz Capacitors

## 115VAC 400HZ CAPACITORS FOR AEROSPACE APPLICATIONS

Knowles has conducted reliability testing on standard surface mount ceramic capacitors in order to ensure their performance at 115Vac 400Hz and the associated voltage and frequency transients required by MIL-STD-704. Self-heating will occur due to losses in the capacitor, but has been measured at less than 25°C rise with neutral mounting conditions at room temperature.



## 115VAC 400HZ CAPACITORS — MINIMUM/MAXIMUM CAPACITANCE VALUES

|                   | 0805                       | 1206       | 1210        | 1808        | 1812       | 2220        |
|-------------------|----------------------------|------------|-------------|-------------|------------|-------------|
| <b>Dielectric</b> | Maximum capacitance values |            |             |             |            |             |
| <b>COG/NPO</b>    | 1pF-330pF                  | 1pF-1.5nF  | 3.9pF-3.9nF | 4.7pF-3.9nF | 10pF-10nF  | 10pF-15nF   |
| <b>X7R</b>        | 100pF-4.7nF                | 100pF-18nF | 100pF-39nF  | 100pF-39nF  | 150pF-82nF | 220pF-100nF |

## ORDERING INFORMATION — 115VAC 400HZ CAPACITORS

| 1206   | Y   | A12                 | 0103   | J   | X                                    | T   |
|--|---|---------------------|--|---|--------------------------------------|---|
| Chip size  | Termination   | Voltage             | Capacitance in picofarads (pF)   | Capacitance tolerance   | Dielectric codes                     | Packaging   |
| <b>0805</b><br><b>1206</b><br><b>1210</b><br><b>1808</b><br><b>1812</b><br><b>2220</b> | <b>Y</b> = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant.<br><br><b>H</b> = FlexiCap™ termination base with nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant.<br><br><b>J</b> = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.<br><br><b>A</b> = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. | <b>A12</b> = 115Vac | First digit is zero.<br>Second and third digits are significant figures of capacitance code.<br>The fourth digit is number of zeros following.<br>Example:<br><b>0103</b> = 10nF | <4.7pF<br><b>H</b> = ±0.05pF<br><b>B</b> = ±0.10pF<br><b>C</b> = ±0.25pF<br><b>D</b> = ±0.50pF<br><br>≥4.7pF & <10pF<br><b>B</b> = ±0.10pF<br><b>C</b> = ±0.25pF<br><b>D</b> = ±0.50pF<br><br>≥10pF<br><b>F</b> = ±1%<br><b>G</b> = ±2%<br><b>J</b> = ±5%<br><b>K</b> = ±10%<br><b>M</b> = ±20% | <b>C</b> = COG/NPO<br><b>X</b> = X7R | <b>T</b> = 178mm (7") reel<br><br><b>R</b> = 330mm (13") reel<br><br><b>B</b> = Bulk pack — tubs or trays |





# DWV Chip Range — COG/NPO and X7R

## HIGH DIELECTRIC WITHSTAND VOLTAGE CAPACITORS (DWV RANGE)

The DWV range is specifically designed for use in applications where a high Dielectric Withstand Voltage (DWV) is required.

These parts have a continuous rated voltage of 500Vdc minimum and are 100% DWV tested at the specified voltages to ensure Flashover (arcing) across the surface does not occur.



- High dielectric withstand voltages (DWV) of 1.5kV and 2.5kV
- These ratings are based on an application of the DWV voltage for a period of up to 60 seconds (where the charging current is limited to 50mA)
- Case sizes: 1206, 1210, 1808, 1812, 2220 and 2225
- COG/NPO and X7R dielectrics
- Capacitance values from 4.7pF to 120nF

## DWV CAPACITORS — MINIMUM/MAXIMUM CAPACITANCE RANGE

|       |         | 1206        | 1210        | 1808        | 1812       | 2220        | 2225        |
|-------|---------|-------------|-------------|-------------|------------|-------------|-------------|
| 1.5kV | COG/NPO | 4.7pF-330pF | 4.7pF-1nF   | 4.7pF-1.2nF | 10pF-2.2nF | 100pF-4.7nF | 100pF-5.6nF |
|       | X7R     | 4.7pF-3.9nF | 4.7pF-10nF  | 4.7pF-12nF  | 10pF-33nF  | 100pF-100nF | 100pF-120nF |
| 2.5kV | COG/NPO | 4.7pF-220pF | 4.7pF-560pF | 4.7pF-1nF   | 10pF-1.5nF | 100pF-3.3nF | 100pF-3.9nF |
|       | X7R     | 4.7pF-1nF   | 4.7pF-2.2nF | 4.7pF-2.7nF | 10pF-5.6nF | 10pF-15nF   | 100pF-18nF  |

## ORDERING INFORMATION — DWV CAPACITORS

| 1812   | J   | 1K5                                      | 0820   | K   | C                                    | T   | DWV                          |
|--|---|--|--|---|--------------------------------------|---|------------------------------|
| Chip size  | Termination   | Dielectric Withstand Voltage             | Capacitance in picofarads (pF)   | Capacitance tolerance   | Dielectric codes                     | Packaging   | Suffix code                  |
| <b>1206</b><br><b>1210</b><br><b>1808</b><br><b>1812</b><br><b>2220</b><br><b>2225</b> | <b>Y</b> = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant.<br><b>J</b> = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. | <b>1K5</b> = 1.5kV<br><b>2K5</b> = 2.5kV | First digit is zero. Second and third digits are significant figures of capacitance code.<br>The fourth digit is number of zeros following.<br>Example: <b>0820</b> = 82pF | <10pF<br><b>B</b> = ±0.10pF<br><b>C</b> = ±0.25pF<br><b>D</b> = ±0.50pF<br>≥10pF<br><b>F</b> = ±1%<br><b>G</b> = ±2%<br>≥10pF<br><b>J</b> = ±5%<br><b>K</b> = ±10%<br><b>M</b> = ±20% | <b>C</b> = COG/NPO<br><b>X</b> = X7R | <b>T</b> = 178mm (7") reel<br><b>R</b> = 330mm (13") reel<br><b>B</b> = Bulk pack — tubs or trays | Dielectric Withstand Voltage |



# X8R High Temperature Capacitors — up to 150°C



The X8R dielectric will operate from -55°C to +150°C, with a maximum capacitance change ±15% (without applied voltage).

The devices are available in sizes 0805 to 2225, with voltage ranges from 25V to 3kV and capacitance values from 100pF to 2.2µF.

The capacitors have been developed by Knowles Precision Devices to meet demand from various applications in the automotive and industrial markets and in other electronic equipment exposed to high temperatures. The increased use of electronics in automotive “under the hood” applications has created demand for this product range.

The X8R range incorporates a specially formulated termination with a nickel barrier finish that has been designed to enhance the mechanical performance of these SMD chip capacitors in harsh environments typically present in automotive applications.

## X8R HIGH TEMPERATURE CAPACITORS — CAPACITANCE VALUES

| X8R            | 0805   | 1206  | 1210  | 1808  | 1812  | 2220  | 2225  |
|----------------|--------|-------|-------|-------|-------|-------|-------|
| Max. Thickness | 1.37mm | 1.7mm | 2.0mm | 2.0mm | 2.5mm | 2.5mm | 2.5mm |
| Min cap        | 100pF  | 100pF | 100pF | 100pF | 150pF | 220pF | 330pF |
| Min cap        | 220pF  | 220pF | 220pF | 220pF | 220pF | 220pF | 330pF |
| 50V            | 47nF   | 150nF | 330nF | 330nF | 680nF | 1.2µF | 2.2µF |
| 100V           | 33nF   | 100nF | 220nF | 220nF | 470nF | 1µF   | 1.5µF |
| 200/250V       | 15nF   | 68nF  | 150nF | 150nF | 330nF | 680nF | 1µF   |
| 500V           | 4.7nF  | 22nF  | 47nF  | 47nF  | 120nF | 330nF | 470nF |
| 630V           | 2.2nF  | 10nF  | 33nF  | 33nF  | 68nF  | 180nF | 220nF |
| 1kV            | 1.5nF  | 3.3nF | 6.8nF | 6.8nF | 27nF  | 68nF  | 82nF  |
| 1.2kV          | -      | 2.2nF | 5.6nF | 5.6nF | 15nF  | 47nF  | 56nF  |
| 1.5kV          | -      | 1.5nF | 3.3nF | 3.3nF | 10nF  | 27nF  | 33nF  |
| 2kV            | -      | 680pF | 1.5nF | 1.5nF | 5.6nF | 15nF  | 22nF  |
| 2.5kV          | -      | -     | -     | 1.2nF | 3.3nF | 10nF  | 12nF  |
| 3kV            | -      | -     | -     | 820pF | 2.7nF | 5.6nF | 6.8nF |

Note: Blue background = AEC-Q200.

### CAPACITANCE RANGE:

100pF to 2.2µF (0805 to 2225)

### TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

±15% from -55°C to +150°C

### CAPACITANCE RANGE:

< 0.025

### TERMINATION:

Nickel Barrier Tin Plated

### INSULATION RESISTANCE (IR):

100G Ω or 1000secs (whichever is the less).

### DIELECTRIC WITHSTAND VOLTAGE (DWV)

2.5 x rated voltage for 5±1 seconds, 50mA charging current maximum.

### AGING RATE:

1% per decade (typical)

## ORDERING INFORMATION — X8R HIGH TEMPERATURE CAPACITORS

| 1206   | Y  | 100  | 0473  | K                               | N                               | T  |
|--|--|--|---|---------------------------------|---------------------------------|--|
| Chip Size  | Termination  | Voltage  | Capacitance in Picofarads (pF)  | Capacitance Tolerance           | Dielectric Release Codes        | Packaging  |
| 0805<br>1206<br>1210<br>1808<br>1812<br>2220<br>2225 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). | 050 = 50V<br>100 = 100V<br>200 = 200V<br>250 = 250V<br>500 = 500V<br>630 = 630V<br>1K0 = 1kV<br>1K5 = 1.5kV<br>2K0 = 2kV<br>2K5 = 2.5kV<br>3K0 = 3kV | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following.<br>Example: 0473 = 47000pF = 47nF | J = ±5%<br>K = ±10%<br>M = ±20% | N = X8R<br><br>T = X8R AEC-Q200 | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs or trays |



# High Temperature Capacitors — 160°C and 200°C

A range of chip capacitors, available in sizes 0805 to 7565, designed to operate from -55°C to 160°C, (Class II Dielectric) and from -55°C to 200°C (COG/NP0 and Class II Dielectrics). Voltage ratings of 25V to 4kV.

## MAXIMUM CAPACITANCE VALUES — 160°C COG (F)/CLASS II (G) AND 200°C COG/NP0 (D)/CLASS II (E) DIELECTRICS

| Size        | 0805          | 1206          | 1210          | 1515          | 1808          | 1812          | 1825          | 2225          | 3530          | 4540          | 6560          | 7565          |
|-------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Tmax</b> | 0.054<br>1.37 | 0.064<br>1.63 | 0.065<br>1.65 | 0.130<br>3.30 | 0.065<br>1.65 | 0.065<br>1.65 | 0.080<br>2.03 | 0.080<br>2.03 | 0.250<br>6.35 | 0.300<br>7.62 | 0.300<br>7.62 | 0.300<br>7.62 |

## MAXIMUM CAPACITANCE VALUES — COG/NP0 — 160°C (F) AND 200°C (D)

| Min cap.    | 0.5pF | 1.0pF | 5.0pF | 5.0pF | 12pF  | 22pF  | 33pF  | 47pF  | 220pF | 39pF  | 56pF  | 100pF |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| <b>25V</b>  | 2.7nF | 5.6nF | 12nF  | 22nF  | 12nF  | 22nF  | 56nF  | 56nF  | 100nF | 180nF | 330nF | 390nF |
| <b>50V</b>  | 1.8nF | 3.9nF | 8.2nF | 18nF  | 8.2nF | 15nF  | 39nF  | 47nF  | 82nF  | 150nF | 270nF | 330nF |
| <b>100V</b> | 680pF | 1.8nF | 3.3nF | 10nF  | 3.3nF | 8.2nF | 15nF  | 18nF  | 56nF  | 100nF | 220nF | 270nF |
| <b>250V</b> | 180pF | 1.0nF | 2.2nF | 3.9nF | 2.2nF | 5.6nF | 12nF  | 18nF  | 33nF  | 56nF  | 120nF | 150nF |
| <b>500V</b> | 100pF | 390pF | 820pF | 2.7nF | 1.0nF | 2.2nF | 3.9nF | 5.6nF | 12nF  | 27nF  | 56nF  | 68nF  |
| <b>1kV</b>  | 47pF  | 100pF | 220pF | 820pF | 220pF | 560pF | 820pF | 1.0nF | 5.6nF | 15nF  | 33nF  | 39nF  |
| <b>2kV</b>  | .     | 27pF  | 56pF  | 180pF | 56pF  | 120pF | 180pF | 270pF | 1.5nF | 3.3nF | 8.2nF | 10nF  |
| <b>3kV</b>  | .     | .     | .     | 82pF  | 22pF  | 56pF  | 82pF  | 100pF | 560pF | 1.5nF | 3.3nF | 3.9nF |
| <b>4kV</b>  | .     | .     | .     | 47pF  | 12pF  | 27pF  | 33pF  | 47pF  | 330pF | 820pF | 1.8nF | 2.2nF |

## MAXIMUM CAPACITANCE VALUES — CLASS II — 160°C (G) AND 200°C (E)

| Min cap.    | 120pF | 120pF | 120pF | 150pF | 150pF | 150pF | 470pF | 470pF | 1.0nF | 1.0nF | 2.2nF | 2.2nF |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| <b>25V</b>  | 82nF  | 220nF | 390nF | 820nF | 330nF | 680nF | 1.5μF | 1.8μF | 3.9μF | 5.6μF | 15μF  | 18μF  |
| <b>50V</b>  | 47nF  | 120nF | 220nF | 680nF | 270nF | 470nF | 1.0μF | 1.2μF | 2.7μF | 4.7μF | 12μF  | 15μF  |
| <b>100V</b> | 18nF  | 47nF  | 100nF | 270nF | 82nF  | 150nF | 470nF | 470nF | 2.2μF | 3.3μF | 8.2μF | 12μF  |
| <b>250V</b> | 4.7nF | 10nF  | 27nF  | 68nF  | 22nF  | 47nF  | 120nF | 150nF | 560nF | 1.2μF | 2.7μF | 3.9μF |
| <b>500V</b> | 1.0nF | 2.2nF | 5.6nF | 18nF  | 5.6nF | 10nF  | 27nF  | 33nF  | 120nF | 330nF | 680nF | 820nF |
| <b>1kV</b>  | 180pF | 390pF | 820pF | 2.7nF | 820pF | 1.5nF | 4.7nF | 5.6nF | 27nF  | 68nF  | 150nF | 220nF |
| <b>2kV</b>  | .     | .     | 150pF | 560pF | .     | 220pF | 560pF | 680pF | 6.8nF | 18nF  | 39nF  | 47nF  |
| <b>3kV</b>  | .     | .     | .     | .     | .     | .     | .     | .     | 2.7nF | 6.8nF | 15nF  | 18nF  |
| <b>4kV</b>  | .     | .     | .     | .     | .     | .     | .     | .     | 1.2nF | 2.7nF | 5.6nF | 8.2nF |

## ORDERING INFORMATION — HIGH TEMPERATURE CAPACITORS

| 1206   | G  | 224  | K  | 250  | N  | X050   | H                          | T  | M   |
|--|--|--|--|--|--|--|----------------------------|--|---|
| Chip size  | Dielectric codes   | Capacitance in picofarads (pF)   | Capacitance tolerance code   | Voltage code   | Termination codes  | Thickness options  | High Reliability Testing   | Packaging  | Marking   |
| 0805<br>1206<br>1210<br>1515<br>1808<br>1812<br>1825<br>2225<br>3530<br>4540<br>6560<br>7565 | <b>F</b> = COG/NP0<br>High Temp. (up to 160°C)<br><b>D</b> = COG/NP0<br>High Temp. (up to 200°C)<br><b>E</b> = Class II<br>High Temp. (up to 200°C)<br><b>G</b> = Class II<br>High Temp. (up to 160°C) | Value in Picofarads.<br>Two significant figures, by number of zeros:<br><b>224</b> = 220nF (220,000pF) | <b>F</b> = ±1% (COG/NP0)<br><b>G</b> = ±2% (COG/NP0)<br><b>J</b> = ±5% (X8R)<br><b>K</b> = ±10% (Class II)<br><b>M</b> = ±20% (Class II) | Two significant figures, followed by number of zeros:<br><b>250</b> = 25 Volts | <b>P</b> = Palladium Silver<br><b>PR</b> = Palladium Silver*<br><b>K</b> = Solderable Palladium Silver*<br><b>N</b> = Nickel Barrier* 100% tin<br><b>Y</b> = Nickel Barrier* 90% tin, 10% lead<br><b>C</b> = FlexiCap™/Nickel Barrier* 100% tin<br><b>D</b> = FlexiCap™/Nickel Barrier* 90% tin, 10% lead<br><b>S</b> = Solderable Silver*<br><br>*Indicates RoHS terminations<br>Note: Nickel barrier not available in 200°C dielectric | <b>Blank</b> = Standard thickness<br><br>"X" = Special thickness, specified in inches:<br><b>X050</b> = 0.050" | High Temperature Screening | <b>None</b> = Bulk<br><b>T</b> = Tape & Reel<br><b>W</b> = Waffle Pack | <b>None</b> = Unmarked<br><b>M</b> = Marked<br>Note: Marking not available on sizes <0603 |



# High Temperature HiT Range — 200°C — COG/NPO and X7R

The HiT range of multilayer ceramic capacitors is suitable for a variety of high temperature applications, including: oil exploration, geothermal, military, automotive under-hood and avionics.

This range is manufactured to exacting standards using our unique screen printing process. This provides a high-quality component suitable for demanding applications.

- 200°C operating temperature
- 0603 to 2220 chip sizes
- COG/NPO and X7R dielectric options
- Capacitance range COG/NPO from 4.7pF up to 47nF
- Capacitance range X7R from 100pF up to 4.7µF
- Voltage ratings from 10V to 630V
- RoHS compliant/Pb Free
- Sn over Ni termination
- Sample kits available

### Insulation Resistance (IR)

25°C >100GΩ or 1000secs (whichever is the less).  
200°C >1GΩ or 10secs (whichever is the less).

### Temperature Coefficient of Capacitance (TCC)

COG/NPO 30ppm/°C to +125°C. X7R ±15% to +125°C

### Aging Rate

COG/NPO Zero. X7R Typically less than 2% per time decade.

## MAXIMUM CAPACITANCE VALUES — HIGH TEMPERATURE HIT RANGE — 200°C COG/NPO AND X7R

Chip size

| Rated Voltage | 0603    |       | 0805    |       | 1206    |       | 1210    |       | 1808    |       | 1812    |       | 2220    |       |
|---------------|---------|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
|               | COG/NPO | X7R   | COG/NPO | X7R   | COG/NPO | X7R   | COG/NPO | X7R   | COG/NPO | X7R   | COG/NPO | X7R   | COG/NPO | X7R   |
| Min Cap       | 3.9pF   | 100pF | 4.7pF   | 100pF | 10pF    | 100pF | 22pF    | 100pF | 22pF    | 100pF | 47pF    | 150pF | 68pF    | 220pF |
| 10V           | 470pF   | 100nF | 1.8nF   | 220nF | 3.9nF   | 820nF | 8.2nF   | 1.2µF | 8.2nF   | 1.2µF | 15nF    | 2.2µF | 47nF    | 4.7µF |
| 16V           | 470pF   | 100nF | 1.8nF   | 220nF | 3.9nF   | 820nF | 8.2nF   | 1.2µF | 8.2nF   | 1.2µF | 15nF    | 2.2µF | 47nF    | 4.7µF |
| 25V           | 470pF   | 47nF  | 1.8nF   | 220nF | 3.9nF   | 820nF | 8.2nF   | 1.2µF | 8.2nF   | 1.2µF | 15nF    | 2.2µF | 47nF    | 4.7µF |
| 50V           | 470pF   | 15nF  | 1.8nF   | 100nF | 3.9nF   | 270nF | 8.2nF   | 680nF | 8.2nF   | 560nF | 15nF    | 1.5µF | 47nF    | 2.2µF |
| 100V          | 390pF   | 8.2nF | 1.5nF   | 33nF  | 3.3nF   | 100nF | 5.6nF   | 270nF | 6.8nF   | 180nF | 12nF    | 560nF | 39nF    | 1.0µF |
| 200V          | 180pF   | 1.2nF | 820pF   | 6.8nF | 1.8nF   | 27nF  | 3.9nF   | 68nF  | 3.9nF   | 47nF  | 10nF    | 82nF  | 39nF    | 120nF |
| 250V          | 120pF   | 820pF | 470pF   | 3.9nF | 1.0nF   | 15nF  | 2.2nF   | 47nF  | 2.2nF   | 27nF  | 5.6nF   | 56nF  | 12nF    | 82nF  |
| 500V          | 100pF   | 270pF | 220pF   | 1.5nF | 820pF   | 3.9nF | 1.5nF   | 12nF  | 1.8nF   | 12nF  | 4.7nF   | 18nF  | 10nF    | 68nF  |
| 630V          | -       | -     | 68pF    | -     | 330pF   | -     | 820pF   | -     | 820pF   | -     | 2.7nF   | -     | 6.8nF   | -     |

Note: Other capacitance values may become available; please contact the Sales Office if you need values other than those shown in the above table.  
For dimensions and soldering information, visit [knowlescapacitors.com](http://knowlescapacitors.com).

## ORDERING INFORMATION — NOVACAP BRAND — HIGH TEMPERATURE HIT RANGE

| 1206   | RE                                       | 331   | J  | 501                                    | N  | H  | T                                     |  |
|--|--|---|--|--|--|--|---------------------------------------|--|
| Case size  | Dielectric                               | Capacitance in picofarads (pF)  | Capacitance tolerance                                |  | Voltage  | Termination  | Screening                             | Packaging  |
| 0603<br>0805<br>1206<br>1210<br>1808<br>1812<br>2220 | RD = COG/NPO (200°C)<br>RE = X7R (200°C) | First and Second digits are significant figures of capacitance code. The fourth digit is number of zeros following.<br>Example: <b>103</b> = 10000pF<br>R = decimal | COG/NPO<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10% | X7R<br>J = ±5%<br>K = ±10%<br>M = ±20% | 100 = 10V<br>160 = 16V<br>250 = 25V<br>500 = 50V<br>101 = 100V<br>201 = 200V<br>251 = 250V<br>501 = 500V<br>631 = 630V | N = Nickel barrier with 100% matte tin plating. RoHS compliant. Lead free. | H = High Temp Screening — if required | T = 178mm (7") reel<br>330mm (13") reel<br>None = Bulk pack — tubs |

## ORDERING INFORMATION — SYFER BRAND — HIGH TEMPERATURE HIT RANGE

| 1206   | J  | 100   | 0103   | M  | X                                      | T                            | H20   |                     |
|--|--|---|--|--|--|------------------------------|---|---------------------|
| Chip size  | Termination  | Voltage   | Capacitance in picofarads (pF)   | Capacitance tolerance                                |  | Dielectric                   | Packaging   | Suffix Code         |
| 0603<br>0805<br>1206<br>1210<br>1808<br>1812<br>2220 | J = Nickel barrier with 100% matte tin plating. RoHS compliant. Lead free. | 010 = 10V<br>016 = 16V<br>025 = 25V<br>050 = 50V<br>063 = 63V<br>100 = 100V<br>200 = 200V<br>250 = 250V<br>500 = 500V<br>630 = 630V | ≥1.0pF & <10pF<br>Insert a P for the decimal point as the second character. e.g., 8P20 = 8.2pF<br>≥10pF<br>First digit is zero.<br>Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. e.g., <b>0101</b> = 100pF | COG/NPO<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10% | X7R<br>J = ±5%<br>K = ±10%<br>M = ±20% | G = COG/NPO (BME)<br>X = X7R | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack — tubs | H20<br>HiT250 range |



# High Temperature HiT250 Range — 250°C — COG/NP0 and X7R

The HiT250 range of multilayer ceramic capacitors is suitable for a variety of high temperature applications including: oil exploration, geothermal, military, automotive under-hood and avionics.

This range is manufactured to exacting standards using our uniquescreen printing process. This provides a high quality component suitable for demanding applications.

- 250°C operating temperature
- 0603 to 2220 chip sizes
- COG/NP0 (1B) and X7R dielectric options
- Capacitance range COG/NP0 (1B) from 3.9pF up to 39nF
- Capacitance range X7R (2R1) from 1nF up to 2.2µF
- Voltage ratings from 10V to 630V
- RoHS compliant / Pb Free
- Au over Ni termination
- Sample kits available

### Insulation Resistance (IR)

25°C >100GΩ or 1000secs (whichever is the less).  
250°C >100MΩ or 1sec (whichever is the less).

### Temperature Coefficient of Capacitance (TCC)

COG/NP0 30ppm/°C to +125°C. X7R ±15% to +125°C

### Aging Rate

COG/NP0 Zero. X7R Typically less than 2% per time decade.

## MAXIMUM CAPACITANCE VALUES — HIGH TEMPERATURE HIT250 RANGE — 250°C COG/NP0 AND X7R

Chip size

| Rated Voltage | 0603    |       | 0805    |       | 1206    |       | 1210    |       | 1808    |       | 1812    |       | 2220    |       |
|---------------|---------|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
|               | COG/NP0 | X7R   | COG/NP0 | X7R   | COG/NP0 | X7R   | COG/NP0 | X7R   | COG/NP0 | X7R   | COG/NP0 | X7R   | COG/NP0 | X7R   |
| Min Cap       | 3.9pF   | 1.0nF | 4.7pF   | 4.7nF | 10pF    | 15nF  | 22pF    | 33nF  | 22pF    | 100nF | 47pF    | 82nF  | 68pF    | 470nF |
| 10V           | 390pF   | 100nF | 1.5nF   | 150nF | 3.3nF   | 330nF | 5.6nF   | 680nF | 5.6nF   | 560nF | 12nF    | 1.5uF | 39nF    | 2.2µF |
| 16V           | 390pF   | 33nF  | 1.5nF   | 100nF | 3.3nF   | 180nF | 5.6nF   | 470nF | 5.6nF   | 330nF | 12nF    | 1.0uF | 39nF    | 1.5µF |
| 25V           | 390pF   | 10nF  | 1.5nF   | 47nF  | 3.3nF   | 150nF | 5.6nF   | 330nF | 5.6nF   | 270nF | 12nF    | 680nF | 39nF    | 1.0µF |
| 50V           | 390pF   | -     | 1.5nF   | -     | 3.3nF   | -     | 5.6nF   | -     | 5.6nF   | -     | 12nF    | -     | 39nF    | -     |
| 100V          | 330pF   | -     | 1.0nF   | -     | 2.7nF   | -     | 3.9nF   | -     | 4.7nF   | -     | 10nF    | -     | 27nF    | -     |
| 200V          | 120pF   | -     | 560pF   | -     | 1.2nF   | -     | 2.7nF   | -     | 2.7nF   | -     | 6.8nF   | -     | 15nF    | -     |
| 250V          | 68pF    | -     | 330pF   | -     | 680pF   | -     | 1.8nF   | -     | 1.8nF   | -     | 4.7nF   | -     | 10nF    | -     |
| 500V          | 33pF    | -     | 120pF   | -     | 390pF   | -     | 820pF   | -     | 1.0nF   | -     | 2.2nF   | -     | 4.7nF   | -     |
| 630V          | -       | -     | 39pF    | -     | 150pF   | -     | 470pF   | -     | 470pF   | -     | 1.5nF   | -     | 2.2nF   | -     |

Note: Other capacitance values may become available, please contact the Sales Office if you need values other than those shown in the above table. For dimensions and soldering information, please go to our website [www.knowlescapacitors.com](http://www.knowlescapacitors.com)

## ORDERING INFORMATION — NOVACAP BRAND — HIGH TEMPERATURE HIT250 RANGE

| 1206   | HD   | 272   | F  | 101                                    | NG   | H  | T  |
|--|--|---|--|--|--|--|--|
| Case size  | Dielectric                                   | Capacitance in picofarads (pF)  | Capacitance tolerance                                | Voltage                                | Termination  | Screening  | Packaging  |
| 0603<br>0805<br>1206<br>1210<br>1808<br>1812<br>2220 | HD = COG/NP0 (250°C)<br><br>HE = X7R (250°C) | First and Second digits are significant figures of capacitance code. The fourth digit is number of 0's following.<br>Example : 103 = 10000pF<br>R = decimal | COG/NP0<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10% | X7R<br>J = ±5%<br>K = ±10%<br>M = ±20% | 100 = 10V<br>160 = 16V<br>250 = 25V<br>500 = 50V<br>101 = 100V<br>201 = 200V<br>251 = 250V<br>501 = 500V<br>631 = 630V | NG = Nickel barrier with gold flash. RoHS compliant. Lead Free.<br><br>H = High Temp Screening - if required | T = 178mm (7") reel<br>330mm (13") reel<br>None = Bulk pack - tubs |

## ORDERING INFORMATION — SYFER BRAND — HIGH TEMPERATURE HIT250 RANGE

| 1206   | G  | 500   | 391   | J  | G                                      | T   | H25                 |
|--|--|---|---|--|--|---|---------------------|
| Chip size  | Termination  | Voltage   | Capacitance in picofarads (pF)  | Capacitance tolerance                                | Dielectric                             | Packaging   | Suffix Code         |
| 0603<br>0805<br>1206<br>1210<br>1808<br>1812<br>2220 | G = Nickel barrier with gold flash. RoHS compliant. Lead Free. | 010 = 10V<br>016 = 16V<br>025 = 25V<br>050 = 50V<br>063 = 63V<br>100 = 100V<br>200 = 200V<br>250 = 250V<br>500 = 500V<br>630 = 630V | ≥1.0pF & <10pF<br>Insert a P for the decimal point as the second character. e.g., 8P20 = 8.2pF ≥10pF<br>First digit is 0.<br>Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. e.g., 0101 = 100pF | COG/NP0<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10% | X7R<br>J = ±5%<br>K = ±10%<br>M = ±20% | G = COG/NP0 (BME)<br>X = X7R<br><br>T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk pack - tubs | H25<br>HiT250 range |



# Capacitor Assemblies — ST and SM — COG/NPO and X7R

Our complete testing facility is available for any additional military testing requirements. Options available include thru-hole and surface mount lead styles, to make them suitable for mounting on ceramic substrates or epoxy PCBs.


Consult the Sales Office if your specific requirements exceed our catalog maximums (size, cap. value and voltage). These ranges of both High Capacitance and High Voltage MLC assemblies are available in COG/NPO and X7R dielectrics. Low ESR and Low ESL are inherent in the design, giving the assemblies a high capability up to 1MHz, and offer far superior performance than either Aluminium or Tantalum electrolytic capacitors.

They are designed for use in high power or high frequency applications such as switched mode power supplies, DC-DC converters, high capacitance discharge circuits and high temperature filtering/decoupling. They can be made with up to five same size chips with various lead configurations to safeguard against thermal and mechanical stresses.


The commercial "ST" series provide the highest capacitance available and are 100% tested for Dielectric Withstanding Voltage, Insulation Resistance, Capacitance and Dissipation Factor.

In contrast, the High Reliability "SM" series is designed and tested for military and industrial applications and tested as per of MIL-PRF-49470 (DSCC 87106), Group A.


## NN or NP (no leads)

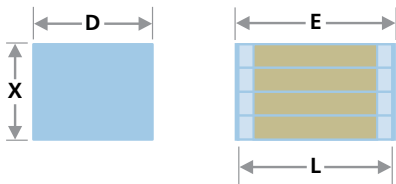


## LN (straight leads)

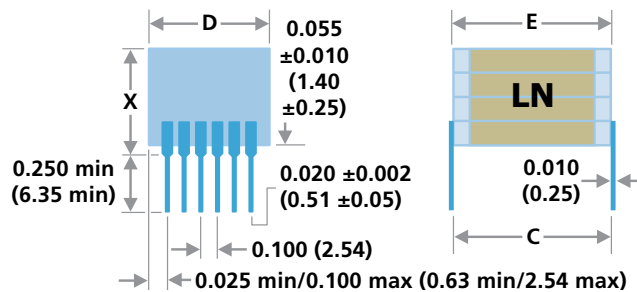

## TJ & TL (tab leads)

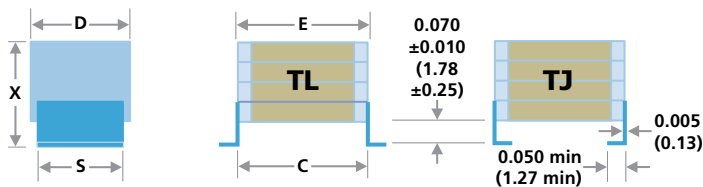

## LJ & LL (bent leads)

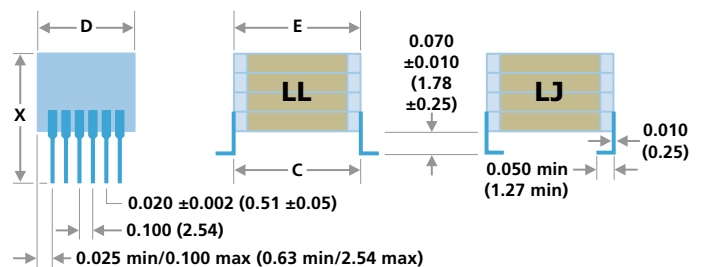

# Capacitor Assemblies – ST and SM – COG/NP0 and X7R

## MAXIMUM STACK HEIGHT, X DIMENSION – INCHES/MM

| No. of chips | Chip size | Style NN, NP | Style TJ & TL | Style LN, LJ & LL |
|--------------|-----------|--------------|---------------|-------------------|
| 1            | 1812      | 0.100/2.54   | 0.180/4.57    | N/A               |
|              | 1825      | 0.100/2.54   | 0.180/4.57    | 0.180/4.57        |
|              | 2225      | 0.120/3.05   | 0.200/5.08    | 0.200/5.08        |
|              | >2225     | N/A          | 0.200/5.08    | 0.200/5.08        |
| 2            | 1812      | 0.200/5.08   | 0.280/7.11    | N/A               |
|              | 1825      | 0.200/5.08   | 0.280/7.11    | 0.280/7.11        |
|              | 2225      | 0.240/6.10   | 0.320/8.13    | 0.320/8.13        |
|              | >2225     | N/A          | 0.320/8.13    | 0.320/8.13        |
| 3            | 812       | 0.300/7.62   | 0.380/9.65    | N/A               |
|              | 1825      | 0.300/7.62   | 0.380/9.65    | 0.380/9.65        |
|              | 2225      | 0.360/9.14   | 0.440/11.2    | 0.440/11.20       |
|              | >2225     | N/A          | 0.440/11.2    | 0.440/11.20       |
| 4            | 1812      | 0.400/10.20  | 0.480/12.2    | N/A               |
|              | 1825      | 0.400/10.20  | 0.480/12.2    | 0.480/12.20       |
|              | 2225      | 0.480/12.20  | 0.560/14.2    | 0.560/14.20       |
|              | >2225     | N/A          | 0.560/14.2    | 0.560/14.20       |
| 5            | 1812      | 0.520/13.20  | 0.600/15.2    | N/A               |
|              | 1825      | 0.520/13.20  | 0.600/15.2    | 0.600/15.2        |
|              | 2225      | 0.635/16.10  | 0.715/18.2    | 0.715/18.2        |
|              | >2225     | N/A          | 0.715/18.2    | 0.715/18.2        |

## DIMENSIONS – INCHES/MM

| Size           | 1812        | 1825       | 2225       | 3640        | 4540        | 5550        | 7565          |
|----------------|-------------|------------|------------|-------------|-------------|-------------|---------------|
| C*             | 0.210/ 5.33 | 0.210/5.33 | 0.250/6.35 | 0.400/10.20 | 0.480/12.20 | 0.580/14.70 | 0.780/19.80   |
| D*             | 0.125/3.18  | 0.250/6.35 | 0.250/6.35 | 0.400/10.20 | 0.400/10.20 | 0.500/12.70 | 0.650**/16.50 |
| E max          | 0.260/6.60  | 0.260/6.60 | 0.300/7.62 | 0.430/10.90 | 0.530/13.50 | 0.630/16.00 | 0.830/21.10   |
| L nom          | 0.180/4.57  | 0.180/4.57 | 0.220/5.59 | 0.360/9.14  | 0.450/11.40 | 0.550/14.00 | 0.750/19.10   |
| Leads per side | N/A         | 3          | 3          | 4           | 4           | 5           | 6             |

Notes: 1) \*C & D inches  $\pm 0.025$ /mm  $\pm 0.64$ ; 2) \*\* $\pm 0.035$ /0.89

## ORDERING INFORMATION – ST AND SM CAPACITOR ASSEMBLIES

| ST   | 3640      | B                                    | 474  | M  | 101   | LJ   | X  | W  | -5        | R                |
|--|-----------|--------------------------------------|--|--|---|--|--|--|-----------|------------------|
| Style  | Size      | Dielectric                           | Capacitance  | Tolerance  | Voltage VDCW  | Lead style   | Thickness option                             | Packing                                      | No. Chips | RoHS             |
| <b>ST</b> = Commercial<br><b>SM</b> = High Reliability | See Chart | <b>N</b> = COG/NP0<br><b>B</b> = X7R | Value in Picofarads. Two significant figures, followed by number of zeros: 825 = 8,200,000pF (8.2 $\mu$ F) | <b>F</b> = $\pm 1\%$ *<br><b>B</b> = $\pm 2\%$ *<br><b>H</b> = $\pm 3\%$ *<br><b>J</b> = $\pm 5\%$ *<br><b>K</b> = $\pm 10\%$ *<br><b>M</b> = $\pm 20\%$ *<br><b>Z</b> = +80 -20%<br><b>P</b> = +100 -0% | Two significant figures, followed by number of zeros: <b>101</b> = 100V | <b>LN</b> = Straight*<br><b>LL</b> = L Lead*<br><b>LJ</b> = J Lead*<br><b>TL</b> = L Tab<br><b>TJ</b> = J tab<br><b>NN</b> = Nickel<br><b>NP</b> = Pd/Ag | Specify standoff dimension if less than max. | <b>W</b> = Waffle<br><b>T</b> = Tape & Reel* | 1 to 5    | $\geq 250V$ RoHS |
|  |           |                                      |  | *COG/NP0 only  |   | *Not 1812  |  | *Consult the sales office                    |           |                  |



# Capacitor Assemblies — ST and SM — COG/NPO

## COG/NPO CAPACITANCE AND VOLTAGE SELECTION

| Size          |      | 1812 |    |      |    |      |    |      |    | 1825 |    |      |    |      |    |      |    | 2225 |    |      |    |      |    |      |    | 3640 |    |      |    |      |    |      |  |
|---------------|------|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|--|
| Rated Voltage |      | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |  |
| Cap           | Code | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM |      |  |
| 10pF          | 100  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |  |
| 12            | 120  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |  |
| 15            | 150  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 18            | 180  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 22            | 220  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 27            | 270  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 33            | 330  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 39            | 390  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 47            | 470  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 56            | 560  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 68            | 680  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 82            | 820  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 100pF         | 101  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 120           | 121  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 150           | 151  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 180           | 181  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 220           | 221  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 270           | 271  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 330           | 331  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 390           | 391  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 470           | 471  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 560           | 561  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 680           | 681  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 820           | 821  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 1.0nF         | 102  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 1.2           | 122  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 1.5           | 152  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 1.8           | 182  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 2.2           | 222  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 2.7           | 272  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 3.3           | 332  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 3.9           | 392  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 4.7           | 472  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 5.6           | 562  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 6.8           | 682  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 8.2           | 822  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 10nF          | 103  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 12            | 123  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 15            | 153  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 18            | 183  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 4  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 22            | 223  | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 5  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 2    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 27            | 273  | 1    | 1  | 1    | 1  | 2    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 3    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 33            | 333  | 1    | 1  | 2    | 1  | 2    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 4  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 3    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 39            | 393  | 2    | 1  | 2    | 1  | 2    | 2  | 5    |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 5  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 4    | 1  | 1    | 1  | 1    | 1  | 1    |  |
| 47            | 473  | 2    | 2  | 2    | 2  | 2    | 3  |      |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 4  | 1    | 1  | 1    | 1  | 1    | 1  | 2    |  |
| 56            | 563  | 2    | 2  | 3    | 3  | 3    | 3  |      |    | 1    | 1  | 1    | 1  | 2    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 5  | 1    | 1  | 1    | 1  | 1    | 1  | 2    |  |
| 68            | 683  | 3    | 3  | 3    | 3  | 3    | 3  |      |    | 1    | 1  | 2    | 2  | 2    | 2  | 4    |    | 1    | 1  | 1    | 1  | 2    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 2    |  |
| 82            | 823  | 3    | 3  | 3    | 3  | 4    | 4  |      |    | 2    | 2  | 2    | 2  | 2    | 2  | 5    |    | 1    | 1  | 2    | 2  | 2    | 2  | 5    |    | 1    | 1  | 1    | 1  | 1    | 1  | 2    |  |
| 100nF         | 104  | 3    | 3  | 4    | 4  | 5    | 5  |      |    | 2    | 2  | 2    | 2  | 2    | 3  |      | 2  | 2    | 2  | 2    | 2  | 2    | 2  |      |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    |  |
| 120           | 124  | 4    | 4  | 5    | 5  |      |    |      |    | 2    | 2  | 2    | 2  | 3    | 3  |      | 2  | 2    | 2  | 2    | 2  | 2    | 2  |      |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    |  |
| 150           | 154  | 5    | 5  |      |    |      |    |      |    | 3    | 3  | 3    | 3  | 3    | 4  |      | 2  | 2    | 3  | 3    | 3  | 3    | 3  |      |    | 1    | 1  | 1    | 1  | 2    | 2  | 4    |  |
| 180           | 184  |      |    |      |    |      |    |      |    | 3    | 3  | 3    | 3  | 4    | 4  |      | 2  | 2    | 3  | 3    | 3  | 4    |    |      |    | 1    | 1  | 1    | 2  | 2    | 2  | 4    |  |
| 220           | 224  |      |    |      |    |      |    |      |    | 4    | 4  | 4    | 4  | 5    | 5  |      | 3  | 3    | 4  | 4    | 4  | 4    | 4  |      |    | 2    | 2  | 2    | 2  | 2    | 3  | 5    |  |
| 270           | 274  |      |    |      |    |      |    |      |    | 4    | 4  | 5    | 5  |      |    |      | 4  | 4    | 4  | 4    | 5  | 5    |    |      |    | 2    | 2  | 2    | 2  | 3    | 3  |      |  |
| 330           | 334  |      |    |      |    |      |    |      |    | 5    | 5  |      |    |      |    |      | 4  | 4    | 5  | 5    |    |      |    |      |    | 2    | 2  | 2    | 2  | 3    | 4  |      |  |
| 390           | 394  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      | 5  | 5    |    |      |    |      |    |      |    | 2    | 3  | 3    | 3  | 4    | 4  |      |  |
| 470           | 474  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 3    | 3  | 3    | 3  | 4    | 5  |      |  |
| 560           | 564  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |  |



# Capacitor Assemblies — ST and SM — COG/NPO

## COG/NPO CAPACITANCE AND VOLTAGE SELECTION

Note: Capacitance values are shown as 3-digit code: 2 significant figures followed by the no. of zeros, e.g., 183 = 18,000pF.

| 4540 |    |      |    |      |    |      |    | 5550 |    |      |    |      |    |      |    | 6560 |    |      |    |      |    |      |    | 7565 |    |      |    |      |    |      |    | Size          |      |
|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|---------------|------|
| 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |    | Rated Voltage |      |
| ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | Cap           | Code |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 10pF          | 100  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 12            | 120  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 15            | 150  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 18            | 180  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 22            | 220  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 27            | 270  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 33            | 330  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 39            | 390  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 47            | 470  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 56            | 560  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 68            | 680  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 82            | 820  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 100pF         | 101  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 120           | 121  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 150           | 151  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 180           | 181  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 220           | 221  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 270           | 271  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 330           | 331  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 390           | 391  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 470           | 471  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 560           | 561  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 680           | 681  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 820           | 821  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 10nF          | 102  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 1.2           | 122  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 1.5           | 152  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 1.8           | 182  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 2.2           | 222  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 2.7           | 272  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 3.3           | 332  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 3.9           | 392  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 4.7           | 472  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 5.6           | 562  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 6.8           | 682  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 8.2           | 822  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 10nF          | 103  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 12            | 123  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 15            | 153  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 18            | 183  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 22            | 223  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 27            | 273  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 33            | 333  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 39            | 393  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 47            | 473  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 56            | 563  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 68            | 683  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 82            | 823  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 100nF         | 104  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 120           | 124  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 150           | 154  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 180           | 184  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 220           | 224  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 270           | 274  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 330           | 334  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 390           | 394  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 470           | 474  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 560           | 564  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 680           | 684  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 820           | 824  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 1.0μF         | 105  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 1.2           | 125  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 1.5           | 155  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 1.8           | 185  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 2.2           | 225  |
|      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    | 2.7           | 275  |

Number of chips required to achieve the capacitance value



# Capacitor Assemblies — ST and SM — X7R

## X7R CAPACITANCE AND VOLTAGE SELECTION

| Size  |      | 1812 |    |      |    |      |    |      |    | 1825 |    |      |    |      |    |      |    | 2225 |    |      |    |      |    |      |    | 3640 |    |      |    |      |    |      |   |  |
|-------|------|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|---|--|
| Vdc   |      | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |    | 50V  |    | 100V |    | 200V |    | 500V |   |  |
| Cap   | Code | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM | ST   | SM |      |   |  |
| 1.0nF | 102  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 1.2   | 122  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 1.5   | 152  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 1.8   | 182  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 2.2   | 222  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 2.7   | 272  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 3.3   | 332  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 3.9   | 392  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 4.7   | 472  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 5.6   | 562  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 6.8   | 682  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 8.2   | 822  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 10nF  | 103  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 12    | 123  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 15    | 153  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 18    | 183  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 22    | 223  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 27    | 273  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 33    | 333  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 39    | 393  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 47    | 473  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 56    | 563  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 68    | 683  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 82    | 823  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 100nF | 104  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 120   | 124  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 150   | 154  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 180   | 184  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 220   | 224  | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 4  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 270   | 274  | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 5  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 330   | 334  | 1    | 1  | 1    | 1  | 1    | 1  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 3  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 1    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 390   | 394  | 1    | 1  | 1    | 1  | 1    | 1  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 4  | 1    | 1  | 1    | 1  | 1    | 1  | 1    | 2  | 3    | 1  | 1    | 1  | 1    | 1  |      |   |  |
| 470   | 474  | 1    | 1  | 1    | 1  | 1    | 1  | 5    |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 4  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 3  | 1    | 1  | 1    | 1  | 1    | 2  |      |   |  |
| 560   | 564  | 1    | 1  | 1    | 1  | 2    | 2  |      |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 5  | 1    | 1  | 1    | 1  | 1    | 1  | 2    | 4  | 1    | 1  | 1    | 1  | 1    | 2  | 2    |   |  |
| 680   | 684  | 1    | 1  | 2    | 2  | 2    | 3  |      |    | 1    | 1  | 1    | 1  | 1    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 4  | 1    | 1  | 1    | 1  | 1    | 2  | 2    |   |  |
| 820   | 824  | 2    | 2  | 2    | 2  | 2    | 3  |      |    | 1    | 1  | 1    | 1  | 1    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 1  | 3    | 5  | 1    | 1  | 1    | 1  | 1    | 2  | 3    |   |  |
| 1.0µF | 105  | 2    | 2  | 2    | 2  | 2    | 3  | 3    |    | 1    | 1  | 1    | 1  | 2    | 2  | 5    |    | 1    | 1  | 1    | 1  | 1    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 2  | 3    |   |  |
| 1.2   | 125  | 2    | 2  | 2    | 2  | 3    | 4  |      |    | 1    | 1  | 1    | 2  | 2    | 3  |      |    | 1    | 1  | 1    | 1  | 2    | 2  | 4    |    | 1    | 1  | 1    | 1  | 1    | 3  | 3    |   |  |
| 1.5   | 155  | 2    | 3  | 3    | 3  | 4    | 5  |      |    | 2    | 2  | 2    | 2  | 2    | 3  |      |    | 1    | 1  | 1    | 1  | 2    | 2  | 5    |    | 1    | 1  | 1    | 1  | 1    | 3  | 4    |   |  |
| 1.8   | 185  | 3    | 3  | 3    | 3  | 4    |    |      |    | 2    | 2  | 2    | 2  | 3    | 4  |      |    | 1    | 2  | 2    | 2  | 2    | 3  |      |    | 1    | 1  | 1    | 1  | 1    | 2  | 4    | 5 |  |
| 2.2   | 225  | 3    | 3  | 4    | 4  | 5    |    |      |    | 2    | 2  | 2    | 3  | 3    | 4  |      |    | 2    | 2  | 2    | 2  | 2    | 3  |      |    | 1    | 1  | 1    | 1  | 2    | 2  | 5    |   |  |
| 2.7   | 275  | 4    | 4  | 4    | 5  |      |    |      |    | 2    | 3  | 3    | 3  | 4    | 5  |      |    | 2    | 2  | 2    | 2  | 3    | 4  |      |    | 1    | 1  | 1    | 2  | 2    | 2  |      |   |  |
| 3.3   | 335  | 5    | 5  |      | 5  |      |    |      |    | 3    | 3  | 3    | 4  | 4    |    |      |    | 2    | 2  | 3    | 3  | 3    | 4  |      |    | 1    | 1  | 2    | 2  | 2    | 3  |      |   |  |
| 3.9   | 395  | 5    |    |      |    |      |    |      |    | 3    | 3  | 4    | 4  | 5    |    |      |    | 3    | 3  | 3    | 3  | 4    | 5  |      |    | 1    | 1  | 2    | 2  | 3    | 3  |      |   |  |
| 4.7   | 475  |      |    |      |    |      |    |      |    | 4    | 4  | 4    | 5  |      |    |      |    | 3    | 3  | 4    | 4  | 5    |    |      |    | 2    | 2  | 2    | 2  | 3    | 3  |      |   |  |
| 5.6   | 565  |      |    |      |    |      |    |      |    | 4    | 5  | 5    |    |      |    |      |    | 4    | 4  | 4    | 4  |      |    |      |    | 2    | 2  | 2    | 3  | 3    | 4  |      |   |  |
| 6.8   | 685  |      |    |      |    |      |    |      |    | 5    |    |      |    |      |    |      |    |      | 4  | 4    | 5  | 5    |    |      |    |      | 2  | 2    | 3  | 3    | 4  | 5    |   |  |
| 8.2   | 825  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      | 5  | 5    |    |      |    |      |    |      | 2  | 2    | 3  | 4    | 5  |      |   |  |
| 10µF  | 106  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      | 3  | 3    | 4  | 4    |    |      |   |  |
| 12    | 126  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      | 3  | 3    | 4  | 5    |    |      |   |  |
| 15    | 156  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      | 4  | 4    | 5  |      |    |      |   |  |
| 18    | 186  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      | 4  | 5    |    |      |    |      |   |  |
| 22    | 226  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      | 5  |      |    |      |    |      |   |  |
| 27    | 276  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |
| 33    | 336  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |
| 39    | 396  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |
| 47    | 476  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |
| 56    | 566  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |
| 68    | 686  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |
| 82    | 826  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |
| 100µF | 107  |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |    |      |   |  |

Number of chips required to achieve the capacitance value





# Capacitor Assemblies — "Cap-Rack" Arrays

The "Cap-Rack" (US Patent 6,058,004) is an assembly of individual chip capacitors, bonded with high temperature epoxy. A "Cap-Rack" can be made up of a pair, to as many as eight, same-size chips — 0603, 0805, 1005, 1206, 1210, 1808, 1812, 1825, 2221 and 2225 — into one single component providing extended freedom for PCB space utilization. Footprint dimensions can also vary to further optimize board space usage. The patented design allows the chips to behave as individual components, not as a single large ceramic mass, and therefore reduces harmful thermal stress during assembly. Typical applications are in Multi-line designs, Mobile phones, Automotive, Computers, Network Devices and Medical products.

Electrical advantages include reduction in "cross talk," to insignificant levels, by elimination of capacitance coupling between adjacent capacitors; the ability to combine resistors and inductors within the "Cap-Rack", as well as mixing and matching capacitance values and dielectrics.


Mechanical advantages include reduced board area; easier to handle; reduced placement cost; reduced component stress and decreased cycle time. "Cap-Rack" can also be used with traditional pick and place equipment.

Consult the sales office for High Reliability versions and custom designs, particularly for high voltage applications.

- For dielectric characteristics, see pages 6 to 8.
- For dimensions of individual chips, see page 23.
- P and AW dimensions are dependant on the chips utilized in the array.
- Cap Arrays require drawings to specify length and width of array and chip size used. Please contact the Sales Office.

## DIMENSIONS — INCHES/MM

| Size               | 0603 | 0805 | 1005 | 1206 | 1210 | 1808 | 1812 | 1825 | 2221 | 2225 |
|--------------------|------|------|------|------|------|------|------|------|------|------|
| Max number of Caps | 6    | 6    | 6    | 6    | 6    | 6    | 8    | 8    | 8    | 8    |

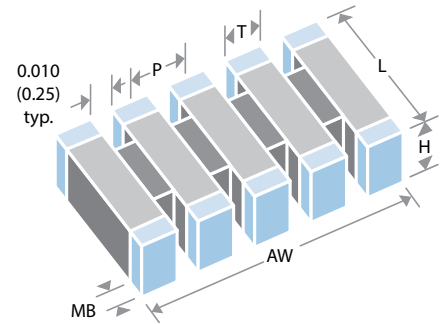

## ORDERING INFORMATION — "CAP-RACK" ARRAYS

| CR       | 1206  | N                                    | 562   | K  | 101  | N   | H                                | T  | - 4          |
|----------|---|--------------------------------------|---|--|--|---|----------------------------------|--|--------------|
| Style    | Size  | Dielectric                           | Capacitance in picofarads (pF)  | Capacitance tolerance  | Voltage d.c.   | Termination   | Hi-Rel Option                    | Packing  | No. of chips |
| Cap-Rack | Size of individual chips that make up the array | <b>N</b> = COG/NPO<br><b>B</b> = X7R | Value in Picofarads. Two significant figures, followed by number of zeros:<br><b>562</b> = 5600pF | <b>B</b> = 0.10pF*<br><b>C</b> = 0.25pF*<br><b>D</b> = 0.50pF*<br><b>F</b> = ± 1.0%*<br><b>G</b> = ± 2.0%*<br><b>H</b> = ± 3.0%*<br><b>J</b> = ± 5%<br><b>K</b> = ± 10%<br><b>M</b> = ± 20%<br><b>Z</b> = +80% -20%<br><b>P</b> = +100% -0%<br>*COG/NPO only | Two significant figures, followed by number of zeros:<br><b>101</b> = 100V | <b>N</b> = Nickel Barrier (100% tin)<br><b>P</b> = Palladium Silver<br><b>Y</b> = Nickel Barrier (90% tin/10% lead) | Ref: MIL-PRF-55681 & MIL-PRF-123 | <b>T</b> = Tape & Reel<br><b>W</b> = Waffle Pack |              |

# Capacitor Assemblies SV2220

The SV capacitor assemblies are a vertical stacking of ceramic capacitors, offering far superior performance than either aluminum or tantalum electrolytic capacitors. They can be made with up to 10 same size chips with various lead configurations to safeguard against thermal and mechanical stresses and are 100% tested for dielectric withstanding voltage, insulation resistance, capacitance and dissipation factor.

They are ideally suited for the input and output stages of switch-mode power supplies and DC-DC converters; the SV capacitor assemblies offer several key benefits:


- Reduces the overall circuit board footprint
- High capacitance to volume ratio
- Low ESR and low ESL
- Capability to handle high ripple currents at high frequencies

## ELECTRICAL SPECIFICATIONS

|   |  |
|---|--|
| <b>DIELECTRIC WITHSTANDING VOLTAGE:</b> | 250% of rated voltage for 5 seconds                |
| <b>INSULATION RESISTANCE AT 25°C:</b>   | 500 mega-ohm/micro-farad minimum                   |
| <b>INSULATION RESISTANCE AT 125°C:</b>  | 50 mega-ohm/micro-farad minimum                    |
| <b>CAPACITANCE AT 25°C:</b>             | 1.0±0.2 VRMS at 120 Hz                             |
| <b>DISSIPATION FACTOR AT 25°C</b>       | 5% maximum at 1.0±0.2 VRMS at 120 Hz               |
| <b>LIFE TEST:</b>                       | 150% of rated voltage at 125°C for 1000 hours      |
| <b>MOISTURE RESISTANCE:</b>             | 10 cycles without voltage. MIL-STD-202 M106        |
| <b>THERMAL SHOCK:</b>                   | MIL-STD-202 M107, test condition A -55°C to +125°C |
| <b>IMMERSION CYCLING:</b>               | MIL-STD-20 M104, condition B                       |
| <b>RESISTANCE TO SOLDER HEAT:</b>       | MIL-STD-202, M210, condition B 20 seconds at 260°C |



# Capacitor Assemblies SV2220



## Applications

- Input and output stages of switch-mode power supplies and DC-DC converters

## Benefits

- Reduces the overall circuit board footprint
- Low ESR and low ESL
- High capacitance to volume ratio
- Superior performance over aluminum or tantalum capacitors

|         |      | Capacitance ( $\mu\text{F}$ ) |    |    |     |    |     |     |
|---------|------|-------------------------------|----|----|-----|----|-----|-----|
|         |      | 14                            | 22 | 27 | 47  | 68 | 100 | 220 |
| Voltage | 25V  |                               |    |    |     | -3 | -5  | -10 |
|         | 50V  |                               |    | -3 | -5  |    | -10 |     |
|         | 100V | -3                            | -5 |    | -10 |    |     |     |

Note: Dash number denotes number of capacitors and leads per side.


| Typical ESR (Ohms) |                  |                  |                  |                   |                   |
|--------------------|------------------|------------------|------------------|-------------------|-------------------|
|                    | 22 $\mu\text{F}$ | 27 $\mu\text{F}$ | 47 $\mu\text{F}$ | 100 $\mu\text{F}$ | 220 $\mu\text{F}$ |
| ESR @ 1kHz         | 0.0830           | 0.0680           | 0.0400           | 0.0240            | 0.0110            |
| ESR @ 10kHz        | 0.0086           | 0.0070           | 0.0040           | 0.0033            | 0.0015            |
| ESR @ 50kHz        | 0.0044           | 0.0031           | 0.0020           | 0.0013            | 0.0006            |
| ESR @ 100kHz       | 0.0032           | 0.0022           | 0.0015           | 0.0009            | 0.0004            |



# Capacitor Assemblies SV2220

## LN (STRAIGHT WIRE LEADS)

## LJ AND LL (BENT WIRE LEADS)

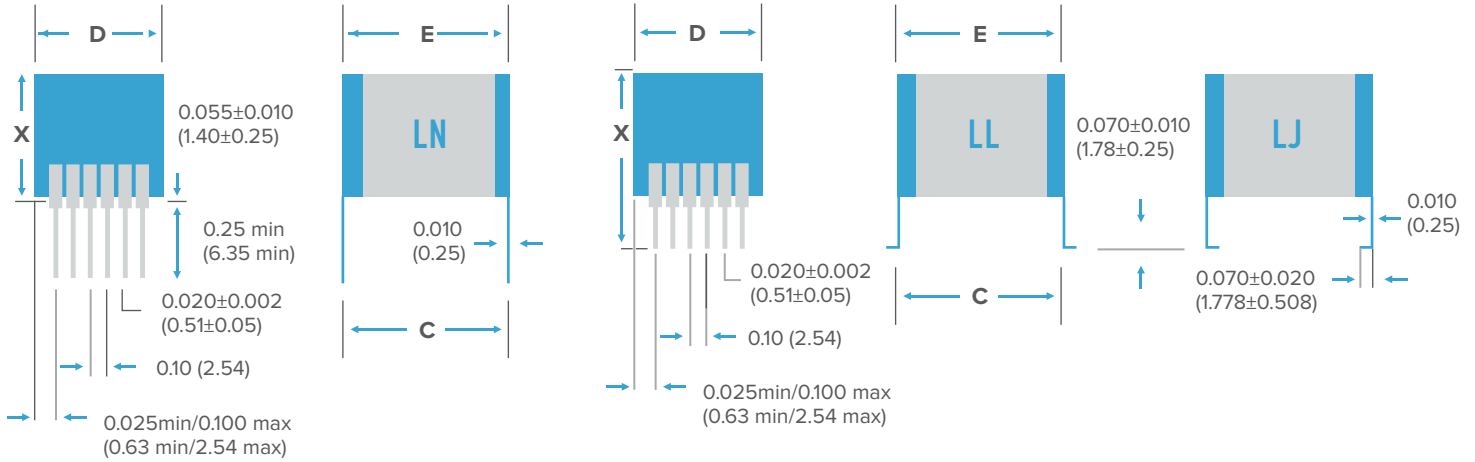

| NUMBER | STYLE  | C ±.025"     | D (MAX)       | E (MAX)      | X (MAX)      |
|--------|--------|--------------|---------------|--------------|--------------|
| -3     | LN     | .250" (6.35) | .375" (9.5)   | .300" (7.62) | .285" (7.24) |
| -3     | LJ, LL | .250" (6.35) | .375" (9.5)   | .300" (7.62) | .300" (7.62) |
| -5     | LN     | .250" (6.35) | .575" (14.6)  | .300" (7.62) | .285" (7.24) |
| -5     | LJ, LL | .250" (6.35) | .575" (14.6)  | .300" (7.62) | .300" (7.62) |
| -10    | LN     | .250" (6.35) | 1.075" (27.3) | .300" (7.62) | .285" (7.24) |
| -10    | LJ, LL | .250" (6.35) | 1.075" (27.3) | .300" (7.62) | .300" (7.62) |

| SV     | 2220      | BB                          | 476  | M          | 101  | LJ  | W                  | -10                               | R   |
|--------|-----------|-----------------------------|--|------------|--|---|--------------------|-----------------------------------|---|
| SERIES | SIZE      | DIELECTRIC                  | CAPACITANCE  | TOLERANCE  | VOLTAGE VDCW   | LEAD STYLE                                  | PACKAGING          | CAPS/LEADS                        | RoHS  |
|        | See Chart | BB = X7R<br>Class II<br>BME | Value in picofarads — two significant figures, followed by number of zeros:<br><b>476 = 47,000,000pF</b> | M = +/-20% | Two significant figures, followed by number of zeros:<br><b>250 = 25V</b><br><b>500 = 50V</b><br><b>101 = 100V</b> | LN = Straight<br>LL = L Lead<br>LJ = J Lead | W =<br>Waffle Pack | Number of caps and leads per side | R = RoHS compliant with exemption 7a<br>R = 100% Sn finish on lead<br>No R on P/N = 60Sn/40Pb finish on leads |



# Radial Leaded Capacitors — Ordering Information

## NOVACAP ORDERING INFORMATION — RADIAL LEADED — STANDARD AND HIGH REL

| 0805       | B   | 123  | K   | 501  | LE   | A  | R   |
|------------|---|--|---|--|--|--|---|
| Size       | Dielectric  | Capacitance  | Tolerance   | Voltage-VDCW   | Lead Styles  | Packing  | RoHS  |
| See charts | <b>N</b> = COG/NP0 RoHS if $\geq 250V$<br><b>B</b> = X7R RoHS if $\geq 250V$<br><b>RN</b> = COG/NP0 RoHS<br><b>RB</b> = X7R RoHS<br><b>S</b> = X8R not RoHS compliant | Value in Picofarads.<br>Two significant figures, followed by number of zeros:<br><b>123</b> = 12,000pF | <b>F</b> = $\pm 1\%$ *<br><b>G</b> = $\pm 2\%$ *<br><b>J</b> = $\pm 5\%$<br><b>K</b> = $\pm 10\%$<br><b>M</b> = $\pm 20\%$<br>*COG parts only | Two significant figures, followed by number of zeros:<br><b>501</b> = 500V | <b>LE, LB, LD, LR, LQ*</b> = Yellow conformal coated<br><b>LO</b> = without any coating<br>* Product and Case size dependent | No suffix = Bulk<br><b>A</b> = Ammo pack 2K/pack<br><b>T</b> = Tape & Reel 4K/Reel | <b>R</b> = RoHS Compliant (Tin Plating)<br><br><b>None</b> = Tin/Lead Plating |

## NOVACAP ORDERING INFORMATION — RADIAL LEADED — HIGH TEMPERATURE

| 2520       | E   | 563  | K   | 501  | LG  | W  | R   |
|------------|---|--|---|--|---|--|---|
| Size       | Dielectric  | Capacitance  | Tolerance   | Voltage-VDCW   | Lead Styles   | Packing                                    | RoHS  |
| See charts | <b>D</b> = 200°C COG/NP0<br><b>E</b> = 200°C Class II | Value in Picofarads.<br>Two significant figures, followed by number of zeros:<br><b>563</b> = 56,000pF | <b>F</b> = $\pm 1\%$ *<br><b>G</b> = $\pm 2\%$ *<br><b>J</b> = $\pm 5\%$<br><b>K</b> = $\pm 10\%$<br><b>M</b> = $\pm 20\%$<br>*COG parts only | Two significant figures, followed by number of zeros:<br><b>501</b> = 500V | <b>LC</b> = Encapsulated<br><b>LG</b> = Black Epoxy Coated<br><b>LO</b> = without any coating | No suffix = Bulk<br><b>W</b> = Waffle pack | <b>R</b> = RoHS Compliant (Tin Plating)<br><br><b>None</b> = Tin/Lead Plating |

## SYFER ORDERING INFORMATION — RADIAL LEADED — STANDARD

| 8111M               | 100                | 0102         | J  | C   | □□□  | □□□                                      |  |
|---------------------|--------------------|--------------|--|---|--|--|--|
| Type No./ Size ref. | Voltage d.c.       |              | Capacitance in picofarads (pF)   | Capacitance tolerance   | Dielectric Rel Release codes                                   | Suffix code                              | Suffix code  |
|                     | Value              | Marking code |  |   |  |  |  |
| <b>8111M</b>        | <b>050</b> = 50V   | (C)          | <10pF  | <10pF   | <b>C</b> = COG/NP0 (1B/CG; CG/BP)                              | Used for specific customer requirements. | C42 denotes RoHS compliant.<br>A31 or A97 denote non-RoHS tin/lead wires.<br>Suffix A97 for 8111 to 8141.<br>Suffix A31 for 8151, 8161 and 8171. |
| <b>8111N</b>        | <b>063</b> = 63V   | (D)          | Insert a P for the decimal point as the second character.<br>e.g., <b>8P20</b> = 8.2pF   | <b>D</b> : $\pm 0.5pF$<br><b>F</b> : $\pm 1.0pF$<br>$\geq 10pF$   | <b>X</b> = X7R (2R1)   |  |  |
| <b>8121M</b>        | <b>100</b> = 100V  | (E)          | $\geq 10pF$  | <b>J</b> : $\pm 5\%$<br><b>K</b> : $\pm 10\%$<br><b>M</b> : $\pm 20\%$<br>$\geq 27pF$<br>(COG/NP0 only) | To Special Order<br><b>B</b> = 2X1 (BX)<br><b>R</b> = 2C1 (BZ) |  |  |
| <b>8121N</b>        | <b>200</b> = 200V  | (F)          | First digit is zero. Second and third digits are significant figures of capacitance code. Fourth digit is number of zeros<br>e.g., <b>0101</b> = 100pF |   |  |  |  |
| <b>8121T</b>        | <b>250</b> = 250V  | -            |  |   |  |  |  |
| <b>8131M</b>        | <b>500</b> = 500V  | (Q)          |  |   |  |  |  |
| <b>8131T</b>        | <b>630</b> = 630V  | -            |  |   |  |  |  |
| <b>8141M</b>        | <b>1K0</b> = 1kV   | -            |  |   |  |  |  |
| <b>8151M</b>        | <b>1K2</b> = 1.2kV | -            |  |   |  |  |  |
| <b>8161M</b>        | <b>1K5</b> = 1.5kV | -            |  |   |  |  |  |
| <b>8165M</b>        | <b>2K0</b> = 2kV   | -            |  |   |  |  |  |
| <b>8171M</b>        | <b>2K5</b> = 2.5kV | -            |  |   |  |  |  |
|                     | <b>3K0</b> = 3kV   | -            |  |   |  |  |  |
|                     | <b>4K0</b> = 4kV   | -            |  |   |  |  |  |
|                     | <b>5K0</b> = 5kV   | -            |  |   |  |  |  |
|                     | <b>6K0</b> = 6kV   | -            |  |   |  |  |  |
|                     | <b>8K0</b> = 8kV   | -            |  |   |  |  |  |
|                     | <b>10K</b> = 10kV  | -            |  |   |  |  |  |
|                     | <b>12K</b> = 12kV  | -            |  |   |  |  |  |

Note: The voltage code may be replaced with the complete voltage (e.g., 1500V = 1K5V) at Syfer's discretion. Marking may be over both sides of the component as necessary.




# Standard Radial Leaded Capacitors — 50V to 5kV

RoHS compliant interconnects, small case size, Radial Leaded capacitors available in C0G/NP0, X7R and X8R dielectrics. The conformal coating and lead mounting style provide a rugged configuration for optimum performance. Units exhibit high capacitance efficiency per kV rating and find application in commercial/industrial use up to 5kV, such as power supplies and voltage multiplier circuits. They are offered in bulk pack or taped form, Ref EIA-RS468, making them suitable for automatic insertion.

- For ordering information, see Novacap Standard and High Rel table on page 93.

## DIMENSIONS — INCHES/MM

| Lead Style   |                            | LE            | LD            | LR            | LD            | LQ            | LD            | LE            | LB             |
|--------------|----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|----------------|
| Size         |                            | 0805          | 0805          | 1206          | 1206          | 1206          | 1210          | 1812          | 2225           |
| <b>Wmax</b>  | inches:<br>mm:             | 0.150<br>3.81 | 0.150<br>3.81 | 0.200<br>5.08 | 0.200<br>5.08 | 0.200<br>5.08 | 0.200<br>5.08 | 0.300<br>7.62 | 0.350<br>8.89  |
| <b>Hmax</b>  | inches:<br>mm:             | 0.150<br>3.81 | 0.150<br>3.81 | 0.150<br>3.81 | 0.150<br>3.81 | 0.150<br>3.81 | 0.200<br>5.08 | 0.250<br>6.35 | 0.350<br>8.89  |
| <b>Tmax</b>  | inches:<br>mm:             | 0.100<br>2.54 | 0.100<br>2.54 | 0.125<br>3.18 | 0.125<br>3.18 | 0.125<br>3.18 | 0.175<br>4.45 | 0.200<br>5.08 | 0.200<br>5.08  |
| <b>HSmax</b> | inches:<br>mm:             | 0.200<br>5.08 | 0.250<br>6.35 | 0.250<br>6.35 | 0.250<br>6.35 | 0.250<br>6.35 | 0.300<br>7.62 | 0.350<br>8.89 | 0.500<br>12.70 |
| <b>S</b>     | inches ±0.02:<br>mm ±0.51: | 0.100<br>2.54 | 0.200<br>5.08 | 0.100<br>2.54 | 0.200<br>5.08 | 0.250<br>6.35 | 0.200<br>5.08 | 0.200<br>5.08 | 0.200<br>5.08  |
| <b>WD</b>    | inches ±0.02:<br>mm ±0.51: | 0.020<br>0.51 | 0.020<br>0.51 | 0.020<br>0.51 | 0.020<br>0.51 | 0.020<br>0.51 | 0.020<br>0.51 | 0.025<br>0.64 | 0.025<br>0.64  |

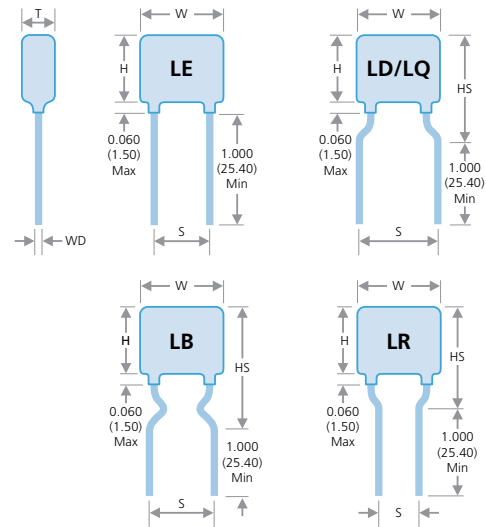

## CAPACITANCE AND VOLTAGE SELECTION — COMMERCIAL RADIAL LEADED CAPACITORS

| Size       | 0805  |       |       | 1206  |       |       | 1210  |       |       | 1812  |       |       | 2225  |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Min cap.   | 10pF  | 120pF | 120pF | 10pF  | 120pF | 220pF | 10pF  | 120pF | 330pF | 100pF | 150pF | 220pF | 100pF | 470pF | 1.0nF |
| Dielectric | C0G   | X7R   | X8R   | C0G   | X7R   | X8R   | C0G   | X7R   | X8R   | C0G   | X7R   | X8R   | C0G   | X7R   | X8R   |
| 50V        | 3.9nF | 100nF | 47nF  | 12nF  | 270nF | 150nF | 22nF  | 470nF | 270nF | 39nF  | 1.2µF | 560nF | 120nF | 1.8µF | 1.2µF |
| 100V       | 3.9nF | 68nF  | 33nF  | 10nF  | 180nF | 100nF | 18nF  | 330nF | 180nF | 27nF  | 820nF | 390nF | 82nF  | 1.5µF | 1.0µF |
| 250V       | 1.5nF | 27nF  | 18nF  | 3.9nF | 68nF  | 33nF  | 8.2nF | 120nF | 82nF  | 22nF  | 390nF | 150nF | 47nF  | 820nF | 560nF |
| 500V       | 820pF | 12nF  | 5.6nF | 1.8nF | 22nF  | 15nF  | 4.7nF | 56nF  | 39nF  | 12nF  | 150nF | 56nF  | 27nF  | 330nF | 150nF |
| 1kV        | 470pF | 2.7nF | •     | 1.0nF | 6.8nF | •     | 2.2nF | 15nF  | •     | 8.2nF | 47nF  | •     | 15nF  | 100nF | •     |
| 2kV        | •     | •     | •     | 390pF | 1.0nF | •     | 820pF | 2.2nF | •     | 2.7nF | 6.8nF | •     | 3.9nF | 15nF  | •     |
| 3kV        | •     | •     | •     | •     | •     | •     | •     | •     | •     | 1.2nF | 2.7nF | •     | 1.8nF | 5.6nF | •     |
| 4kV        | •     | •     | •     | •     | •     | •     | •     | •     | •     | 820pF | 1.2nF | •     | 1.0nF | 1.5nF | •     |
| 5kV        | •     | •     | •     | •     | •     | •     | •     | •     | •     | •     | •     | •     | 560pF | 1.0nF | •     |

Note: Parts in this range may be defined as dual use under export control legislation, and as such may be subject to export licence restrictions. Please refer to page 15 for more information on the dual-use regulations and contact the Sales Office for further information on specific part numbers.




# Standard Radial Leaded Capacitors — 500V to 10kV

RoHS or Non-RoHS Radial Leaded Capacitors available in COG/NPO and X7R dielectrics with high voltage ratings from 500V. The conformal coating and lead mounting style provide a rugged configuration for optimum performance. Units exhibit high capacitance efficiency per kV rating and find application in commercial/industrial use up to 10kV, such as power supplies and voltage multiplier circuits. They are also offered without the conformal coating for less harsh environmental applications.

- For ordering information, see Novacap Standard and High Rel table on page 93.

## DIMENSIONS — INCHES/MM

| Lead Style  |               | LE with conformal coating - LO without |       |       |       |       |       |       |
|-------------|---------------|--|-------|-------|-------|-------|-------|-------|
| Size        |               | 1515                                   | 2520  | 3530  | 4540  | 5550  | 6560  | 7565  |
| <b>Wmax</b> | inches:       | 0.250                                  | 0.400 | 0.500 | 0.600 | 0.700 | 0.800 | 0.900 |
|             | mm:           | 6.35                                   | 10.20 | 12.70 | 15.20 | 17.80 | 20.30 | 22.80 |
| <b>Hmax</b> | inches:       | 0.250                                  | 0.350 | 0.450 | 0.550 | 0.650 | 0.750 | 0.850 |
|             | mm:           | 6.35                                   | 8.89  | 11.40 | 14.00 | 16.50 | 19.00 | 21.60 |
| <b>Tmax</b> | inches:       | 0.200                                  | 0.250 | 0.350 | 0.400 | 0.400 | 0.400 | 0.400 |
|             | mm:           | 5.08                                   | 6.35  | 8.89  | 10.20 | 10.20 | 10.20 | 10.20 |
| <b>S</b>    | inches ±0.02: | 0.170                                  | 0.280 | 0.380 | 0.480 | 0.580 | 0.680 | 0.780 |
|             | mm ±0.51:     | 4.32                                   | 7.10  | 9.65  | 12.20 | 14.70 | 17.30 | 19.80 |

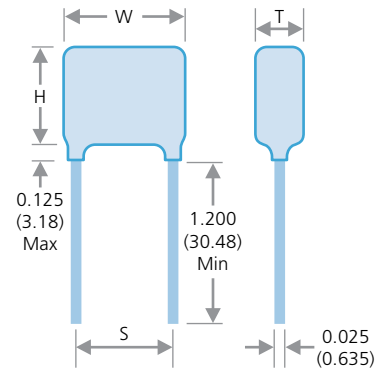

## CAPACITANCE AND VOLTAGE SELECTION — STANDARD RADIAL LEADED CAPACITORS

| Size       | 1515  |       | 2520  |       | 3530  |       | 4540  |       | 5550  |       | 6560  |       | 7565  |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Min cap.   | 10pF  | 150pF | 39pF  | 1.0nF | 39pF  | 1.0nF | 39pF  | 1.0nF | 39pF  | 1.0nF | 56pF  | 2.2nF | 100pF | 2.2nF |
| Dielectric | COG   | X7R   | COG   | X7R   | COG   | X7R   | COG   | X7R   | COG   | X7R   | COG   | X7R   | COG   | X7R   |
| 500V       | 8.2nF | 150nF | 39nF  | 680nF | 68nF  | 1.0µF | 120nF | 1.8µF | 180nF | 2.2µF | 270nF | 3.3µF | 330nF | 4.7µF |
| 600V       | 6.8nF | 120nF | 22nF  | 390nF | 39nF  | 680nF | 82nF  | 1.5µF | 150nF | 2.2µF | 220nF | 2.7µF | 270nF | 3.9µF |
| 800V       | 6.8nF | 82nF  | 18nF  | 270nF | 33nF  | 390nF | 68nF  | 820nF | 120nF | 1.5µF | 180nF | 2.2µF | 220nF | 2.7µF |
| 1kV        | 5.6nF | 56nF  | 12nF  | 180nF | 27nF  | 330nF | 56nF  | 680nF | 100nF | 1.0µF | 150nF | 1.5µF | 180nF | 2.2µF |
| 2kV        | 2.7nF | 8.2nF | 5.6nF | 27nF  | 15nF  | 68nF  | 33nF  | 180nF | 47nF  | 270nF | 68nF  | 390nF | 100nF | 470nF |
| 3kV        | 1.2nF | 3.3nF | 2.7nF | 12nF  | 10nF  | 27nF  | 22nF  | 68nF  | 33nF  | 120nF | 47nF  | 180nF | 56nF  | 220nF |
| 4kV        | 6.8nF | 1.2nF | 1.5nF | 4.7nF | 5.6nF | 15nF  | 12nF  | 33nF  | 18nF  | 47nF  | 27nF  | 82nF  | 39nF  | 100nF |
| 5kV        | -     | -     | 1.0nF | 2.7nF | 3.3nF | 10nF  | 8.2nF | 18nF  | 12nF  | 33nF  | 18nF  | 47nF  | 22nF  | 56nF  |
| 6kV        | -     | -     | -     | -     | 1.8nF | 5.6nF | 3.9nF | 12nF  | 5.6nF | 22nF  | 10nF  | 33nF  | 12nF  | 39nF  |
| 7kV        | -     | -     | -     | -     | 1.2nF | 4.7nF | 2.7nF | 8.2nF | 4.7nF | 15nF  | 6.8nF | 22nF  | 8.2nF | 27nF  |
| 8kV        | -     | -     | -     | -     | 1.0nF | 3.3nF | 2.2nF | 6.8nF | 3.3nF | 12nF  | 5.6nF | 15nF  | 6.8nF | 22nF  |
| 9kV        | -     | -     | -     | -     | -     | 2.7nF | 1.8nF | 4.7nF | 2.7nF | 10nF  | 3.9nF | 12nF  | 4.7nF | 18nF  |
| 10kV       | -     | -     | -     | -     | -     | 1.8nF | 1.5nF | 3.9nF | 2.2nF | 6.8nF | 3.3nF | 10nF  | 3.9nF | 12nF  |

Note: Parts in this range may be defined as dual use under export control legislation, and as such may be subject to export licence restrictions. Please refer to page 15 for more information on the dual-use regulations and contact the Sales Office for further information on specific part numbers.



# Standard Radial Leaded Capacitors — COG/NPO and X7R

Knowles produces a wide range of dipped radial leaded capacitors. These are available in rated voltages of 50V up to 6kV. Although our catalog range extends to 6kV, we are able to offer a capability for specials up to 12kV. Our larger case sizes and high voltage versions are particularly in demand, especially for mil/aero and medical power supply applications. Please contact the Sales Office to discuss any special requirements.

- High working voltage — up to 12kVdc
- Large case sizes
- RoHS compliant versions
- Tin-lead plated wire option to reduce tin whiskers (quote suffix A97 for 8111 to 8141 and A31 for 8151, 8161, 8171).
- For ordering information, see Syfer table on page 93.

|                 |         | 8111M | 8111N | 8121M | 8121N | 8121T | 8131M | 8131M<br>T = 6.3mm | 8131T | 8141M | 8151M | 8151M<br>T = 6.3mm | 8161M | 8161M<br>T = 7.0mm | 8171M | 8171M<br>T = 7.0mm |
|-----------------|---------|-------|-------|-------|-------|-------|-------|--------------------|-------|-------|-------|--------------------|-------|--------------------|-------|--------------------|
| Min. cap values | COG/NPO | 4.7pF | 4.7pF | 4.7pF | 4.7pF | 4.7pF | 4.7pF | -                  | 10pF  | 4.7pF | 10pF  | -                  | 27pF  | -                  | 47pF  | -                  |
|                 | X7R     | 100pF | 100pF | 100pF | 100pF | 330pF | 100pF | -                  | 150pF | 100pF | 470pF | -                  | 1.0nF | -                  | 1.8nF | -                  |
| 50V/63V         | COG/NPO | 5.6nF | 5.6nF | 33nF  | 33nF  | 33nF  | 220nF | -                  | 100nF | 220nF | 330nF | -                  | 680nF | -                  | 1.0µF | -                  |
|                 | X7R     | 220nF | 220nF | 1.0µF | 1.0µF | 1.0µF | 3.3µF | -                  | 2.2µF | 4.7µF | 10µF  | -                  | 15µF  | -                  | 22µF  | -                  |
| 100V            | COG/NPO | 2.2nF | 2.2nF | 18nF  | 18nF  | 18nF  | 82nF  | -                  | 47nF  | 82nF  | 270nF | -                  | 470nF | -                  | 680nF | -                  |
|                 | X7R     | 100nF | 100nF | 680nF | 680nF | 680nF | 2.7µF | -                  | 1.5µF | 2.7µF | 5.6µF | -                  | 10µF  | -                  | 15µF  | -                  |
| 200V/<br>250V   | COG/NPO | 1.0nF | 1.0nF | 8.2nF | 8.2nF | 8.2nF | 47nF  | 68nF               | 22nF  | 47nF  | 120nF | 180nF              | 270nF | 330nF              | 390nF | 560nF              |
|                 | X7R     | 56nF  | 56nF  | 330nF | 330nF | 330nF | 1.5µF | -                  | 680nF | 1.5µF | 3.3µF | -                  | 5.6µF | -                  | 10µF  | -                  |
| 500V            | COG/NPO | 680pF | 680pF | 6.8nF | 6.8nF | 6.8nF | 33nF  | 47nF               | 15nF  | 33nF  | 82nF  | 120nF              | 180nF | 270nF              | 270nF | 470nF              |
|                 | X7R     | 15nF  | 15nF  | 150nF | 150nF | 150nF | 820nF | -                  | 330nF | 820nF | 1.0µF | -                  | 1.8µF | -                  | 3.3µF | -                  |
| 630V            | COG/NPO | 560pF | 560pF | 3.9nF | 3.9nF | 3.9nF | 22nF  | 39nF               | 10nF  | 22nF  | 68nF  | 100nF              | 120nF | 180nF              | 220nF | 390nF              |
|                 | X7R     | 12nF  | 12nF  | 100nF | 100nF | 100nF | 390nF | -                  | 180nF | 470nF | 680nF | -                  | 1.2µF | -                  | 2.2µF | -                  |
| 1kV             | COG/NPO | 180pF | 180pF | 2.2nF | 2.2nF | 2.2nF | 18nF  | 27nF               | 6.8nF | 18nF  | 47nF  | 82nF               | 82nF  | 150nF              | 150nF | 270nF              |
|                 | X7R     | 10nF  | 10nF  | 47nF  | 47nF  | 47nF  | 150nF | -                  | 100nF | 150nF | 180nF | -                  | 390nF | -                  | 1.0µF | -                  |
| 1.2kV           | COG/NPO | 120pF | 120pF | 1.5nF | 1.5nF | 1.5nF | 12nF  | 22nF               | 4.7nF | 12nF  | 33nF  | 56nF               | 68nF  | 100nF              | 100nF | 180nF              |
|                 | X7R     | -     | -     | 10nF  | 10nF  | 10nF  | 100nF | -                  | 33nF  | 100nF | 150nF | -                  | 220nF | -                  | 470nF | -                  |
| 1.5kV           | COG/NPO | 82pF  | 82pF  | 820pF | 820pF | 820pF | 6.8nF | 12nF               | 2.7nF | 6.8nF | 22nF  | 39nF               | 39nF  | 68nF               | 68nF  | 120nF              |
|                 | X7R     | -     | -     | 6.8nF | 6.8nF | 6.8nF | 68nF  | -                  | 22nF  | 68nF  | 100nF | -                  | 150nF | -                  | 330nF | -                  |
| 2kV             | COG/NPO | 39pF  | 39pF  | 390pF | 390pF | 390pF | 4.7nF | 6.8nF              | 1.5nF | 4.7nF | 10nF  | 18nF               | 22nF  | 39nF               | 39nF  | 68nF               |
|                 | X7R     | -     | -     | 4.7nF | 4.7nF | 4.7nF | 33nF  | -                  | 10nF  | 47nF  | 47nF  | -                  | 82nF  | -                  | 150nF | -                  |
| 2.5kV           | COG/NPO | -     | -     | 220pF | 220pF | 220pF | 2.2nF | 3.9nF              | 820pF | 2.2nF | 6.8nF | 12nF               | 12nF  | 22nF               | 22nF  | 39nF               |
|                 | X7R     | -     | -     | -     | -     | -     | 12nF  | -                  | 3.3nF | 12nF  | 33nF  | -                  | 68nF  | -                  | 100nF | -                  |
| 3kV             | COG/NPO | -     | -     | 150pF | 150pF | 150pF | 1.8nF | 2.7nF              | 560pF | 1.8nF | 4.7nF | 8.2nF              | 10nF  | 18nF               | 15nF  | 27nF               |
|                 | X7R     | -     | -     | -     | -     | -     | 8.2nF | -                  | 2.7nF | 10nF  | 22nF  | -                  | 47nF  | -                  | 82nF  | -                  |
| 4kV             | COG/NPO | -     | -     | -     | -     | -     | 820pF | 1.5nF              | 270pF | 820pF | 1.8nF | 3.3nF              | 4.7nF | 6.8nF              | 8.2nF | 15nF               |
|                 | X7R     | -     | -     | -     | -     | -     | 5.6nF | -                  | 2.2nF | 5.6nF | 6.8nF | -                  | 15nF  | -                  | 33nF  | -                  |
| 5kV             | COG/NPO | -     | -     | -     | -     | -     | 560pF | 1.0nF              | 180pF | 560pF | 1.5nF | 2.2nF              | 2.7nF | 4.7nF              | 5.6nF | 10nF               |
|                 | X7R     | -     | -     | -     | -     | -     | 4.7nF | -                  | 1.2nF | 4.7nF | 5.6nF | -                  | 10nF  | -                  | 22nF  | -                  |
| 6kV             | COG/NPO | -     | -     | -     | -     | -     | 390pF | 680pF              | 120pF | 390pF | 1.0nF | 1.5nF              | 1.8nF | 3.3nF              | 3.9nF | 6.8nF              |
|                 | X7R     | -     | -     | -     | -     | -     | 2.7nF | -                  | 1.0nF | 2.7nF | 4.7nF | -                  | 8.2nF | -                  | 15nF  | -                  |
| 8kV             | COG/NPO | -     | -     | -     | -     | -     | -     | -                  | -     | -     | 150pF | -                  | 330pF | -                  | 680pF | -                  |
|                 | X7R     | -     | -     | -     | -     | -     | -     | -                  | -     | -     | 1.5nF | -                  | 4.7nF | -                  | 6.8nF | -                  |
| 10kV            | COG/NPO | -     | -     | -     | -     | -     | -     | -                  | -     | -     | 100pF | -                  | 180pF | -                  | 470pF | -                  |
|                 | X7R     | -     | -     | -     | -     | -     | -     | -                  | -     | -     | 1.0nF | -                  | 2.2nF | -                  | 4.7nF | -                  |
| 12kV            | COG/NPO | -     | -     | -     | -     | -     | -     | -                  | -     | -     | 68pF  | -                  | 120pF | -                  | 220pF | -                  |
|                 | X7R     | -     | -     | -     | -     | -     | -     | -                  | -     | -     | 820pF | -                  | 1.2nF | -                  | 2.2nF | -                  |
|                 |         | 8111M | 8111N | 8121M | 8121N | 8121T | 8131M | 8131M<br>T = 6.3mm | 8131T | 8141M | 8151M | 8151M<br>T = 6.3mm | 8161M | 8161M<br>T = 7.0mm | 8171M | 8171M<br>T = 7.0mm |

Notes: 1) T = Maximum thickness.

2) Parts in this range may be defined as dual use under export control legislation as such may be subject to export licence restrictions.

Please refer to page 15 for more information on the dual-use regulations and contact the Sales Office for further information on specific part numbers.




# Standard Radial Leaded Capacitors — Packaging Information


## DIMENSIONS — RADIAL LEADED CAPACITORS

|       | Pattern | Width                | Height               | Thickness             | Lead Space              | Lead Diameter            |
|-------|---------|----------------------|----------------------|-----------------------|-------------------------|--------------------------|
|       |         | (X) max. mm (inches) | (Y) max. mm (inches) | (Z) max. mm (inches)  | (S) mm (inches)         | (d) mm (inches)          |
| 8111M | A       | 3.81 (0.15)          | 5.31 (0.21)          | 2.54 (0.10)           | 2.54 ±0.4 (0.1 ±0.016)  | 0.5 ±0.05 (0.02 ±0.002)  |
| 8111N | B       | 3.81 (0.15)          | 5.31 (0.21)          | 2.54 (0.10)           | 5.08 ±0.4 (0.2 ±0.016)  | 0.5 ±0.05 (0.02 ±0.002)  |
| 8121M | A       | 5.08 (0.20)          | 6.58 (0.26)          | 3.18 (0.125)          | 2.54 ±0.4 (0.1 ±0.016)  | 0.5 ±0.05 (0.02 ±0.002)  |
| 8121N | B       | 5.08 (0.20)          | 6.58 (0.26)          | 3.18 (0.125)          | 5.08 ±0.4 (0.2 ±0.016)  | 0.5 ±0.05 (0.02 ±0.002)  |
| 8121T | B       | 10.16 (0.40)         | 5.80 (0.23)          | 4.50 (0.18)           | 7.62 ±0.4 (0.30 ±0.016) | 0.5 ±0.05 (0.02 ±0.002)  |
| 8131M | A       | 7.62 (0.30)          | 9.12 (0.36)          | 3.81/6.30 (0.15/0.25) | 5.08 ±0.4 (0.2 ±0.016)  | 0.5 ±0.05 (0.02 ±0.002)  |
| 8131T | B       | 10.16 (0.40)         | 9.12 (0.36)          | 4.50 (0.18)           | 7.62 ±0.4 (0.30 ±0.016) | 0.5 ±0.05 (0.02 ±0.002)  |
| 8141M | A       | 10.16 (0.40)         | 11.66 (0.46)         | 3.81 (0.15)           | 5.08 ±0.4 (0.2 ±0.016)  | 0.5 ±0.05 (0.02 ±0.002)  |
| 8151M | A       | 12.70 (0.50)         | 14.20 (0.56)         | 5.08/6.30 (0.20/0.25) | 10.1 ±0.4 (0.4 ±0.016)  | 0.6 ±0.05 (0.025 ±0.002) |
| 8161M | A       | 18.50 (0.73)         | 16.50 (0.65)         | 6.00/7.00 (0.24/0.28) | 14.5 ±0.5 (0.57 ±0.02)  | 0.6 ±0.05 (0.025 ±0.002) |
| 8165M | A       | 19.00 (0.75)         | 19.00 (0.75)         | 4.25 (0.17)           | 17.5 ±0.5 (0.67 ±0.02)  | 0.6 ±0.05 (0.025 ±0.002) |
| 8171M | A       | 25.00 (0.98)         | 20.00 (0.79)         | 6.00/7.00 (0.24/0.28) | 21.0 ±0.6 (0.83 ±0.024) | 0.6 ±0.05 (0.025 ±0.002) |

### PATTERN A

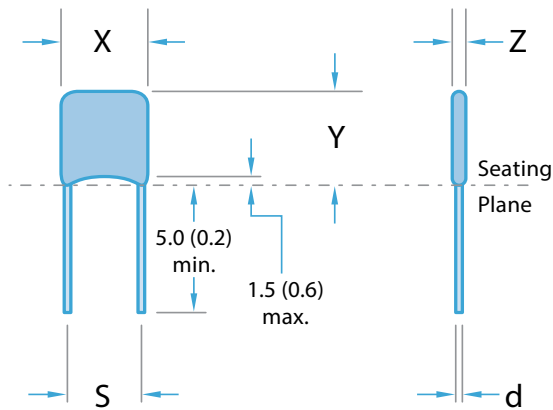

### PATTERN B

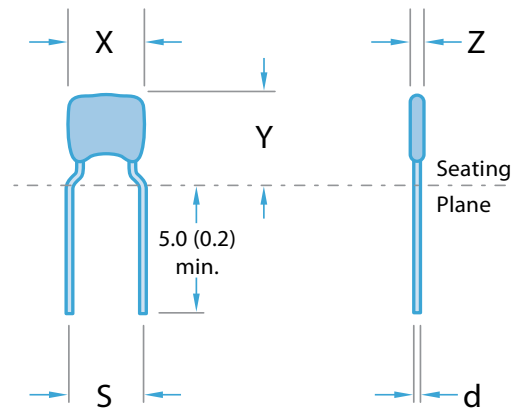


Note: Pattern A may be substituted with Pattern B at Knowles' discretion.

### MARKING INFORMATION

All encapsulated capacitors are marked with: Capacitance value, tolerance, rated d.c. voltage, dielectric and, where size permits, the Syfer "S" logo.

### EXAMPLE: 1000PF ±10% 50V 2X1 DIELECTRIC

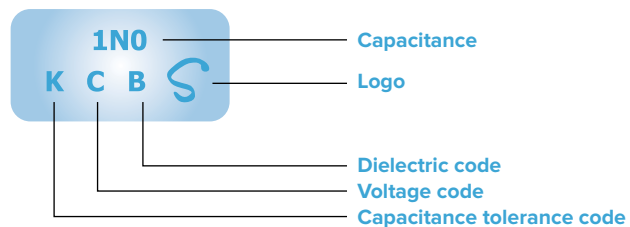

Note: Parts in this range may be defined as dual use under export control legislation as such may be subject to export licence restrictions. Please refer to page 15 for more information on the dual-use regulations and contact the Sales Office for further information on specific part numbers.



# Radial Leaded Capacitors — Packaging Information

## CROPPED LEADS

Cropped leads between 4.0 (0.157) and 30.0 (1.18) are available to special order. Some of the preferred codes are listed below, together with the appropriate suffix code.

Dimensions as for standard product except as specified.

| Suffix code — AE3<br>All radial ranges                               | Suffix code — AE4<br>All radial ranges                               | Suffix code — AD7<br>All radial ranges                             | Suffix code — AD5<br>All radial ranges                              |
|--|--|--|---|
| <b>Lead length (L)</b><br>6 ± 1 (0.236 ± 0.04)<br>from seating plane | <b>Lead length (L)</b><br>4 ± 1 (0.162 ± 0.04)<br>from seating plane | <b>Lead length (L)</b><br>5 ± 1 (0.2 ± 0.04)<br>from seating plane | <b>Lead length (L)</b><br>10 ± 1 (0.4 ± 0.04)<br>from seating plane |

Dimensions mm (inches)

## SNAP IN LEADS

Various forms of snap in leads (preformed) are available to special order, some of the preferred suffix codes are listed below.


Dimensions as for standard product except as specified.

### SUFFIX CODE — AD1

For PCB holes 0.9mm diameter  
Types 8121N and 8131M

Dimensions

Y = 8121N 8 (0.315) Max  
8131M 10 (0.394) Max  
L = Min: 2.75 (0.108)  
Max: 3.50 (0.138)




### SUFFIX CODE — AD2

For PCB holes 1.2mm diameter  
Types 8131M

Dimensions

Y = 10 (0.294) Max  
L = Min: 2.75 (0.108)  
Max: 3.50 (0.138)




### SUFFIX CODE — AD3

For PCB holes 1.2mm diameter  
Types 8121N

Dimensions

Y = 8 (0.315) Max  
L = Min: 2.75 (0.108)  
Max: 3.50 (0.138)




## BANDOLIERY SUFFIX CODES


Dipped radial leaded with 2.54 and 5.08mm lead spacing can be supplied bandoliered on reels or in ammo boxes to special order. Some of the preferred suffix codes for bandoliered products are given below.

For bandoliered products, the minimum order quantity, pieces, is specified in the tables below; larger orders must be in multiples of this quantity.

## DIPPED — STRAIGHT AND FORMED LEADS



## DIPPED — STAND-OFF LEAD FORM



This style has been developed to provide a meniscus-free seating plane with a stress-relieving form for auto-insertion.

### Suffix code

| Product code | Lead style        | Diagram | H      | H <sub>0</sub> | Suffix code     |                 |                 |
|--------------|-------------------|---------|--------|----------------|-----------------|-----------------|-----------------|
|              |                   |         |        |                | Reel            | AMMO pack       |                 |
| 8111M        | Straight 2.54 crs | A       | 19±1   | —              | 2,500pcs<br>C01 | 1,000pcs<br>C02 | 2,000pcs<br>C11 |
| 8111M        | Straight 2.54 crs | A       | 16±0.5 | —              | C30             | C31             | C32             |
| 8111N        | Formed 5.08 crs   | B       | —      | 16±0.5         | C01             | C02             | C11             |
| 8121M        | Straight 2.54 crs | A       | 19±1   | —              | C01             | C02             | C11             |
| 8121M        | Straight 2.54 crs | A       | 16±0.5 | —              | C30             | C31             | C32             |
| 8121N        | Formed 5.08 crs   | B       | —      | 16±0.5         | C01             | C02             | C11             |
| 8131M        | Straight 5.08 crs | A       | 19±1   | —              | C01             | C02             | C11             |
| 8131M        | Straight 5.08 crs | A       | 16±0.5 | —              | C30             | C31             | C32             |

Note: 8121T and 8131T available in bulk packaging only.

| Product code | Lead style      | Y max | H <sub>0</sub> | 2,500pcs | 1,000pcs | 2,000pcs |
|--------------|-----------------|-------|----------------|----------|----------|----------|
| 8111N        | Formed 5.08 crs | 7.5   | 16±0.5         | C12      | C23      | C22      |
| 8111N        | Formed 5.08 crs | 7.5   | 19±1           | C13      | C25      | C24      |
| 8121N        | Formed 5.08 crs | 8.5   | 16±0.5         | C12      | C23      | C22      |
| 8121N        | Formed 5.08 crs | 8.5   | 19±1           | C13      | C25      | C24      |



# Radial Leaded Capacitors — Packaging Information

For automatic insertion, the number of empty places in the tape per reel or fan-fold arrangement shall not exceed:

Three (3) missing components, when the component pitch is equivalent to one sprocket hole pitch.


One (1) missing component, when the component pitch is equivalent to two sprocket hole pitches or more.

At the beginning and end of a reel, the bandolier will exhibit at least 10 blank positions.

Minimum pull strength of product from tape = 5N.

Each reel/carton is provided with a label showing the: Manufacturer, product style, batch identification, quantity and date code.

Labeling with bar codes (code 39) is available on request.

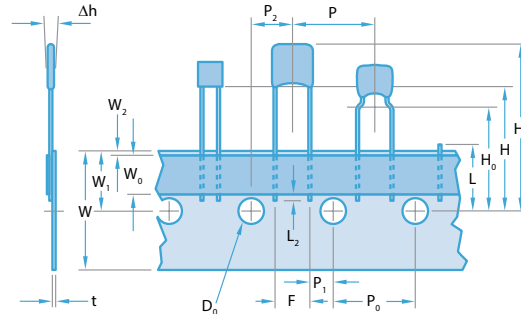


In accordance with IEC 60286 part 2.

## DIMENSIONS MM (INCHES)

| Description   | Symbol         | 2.5mm lead space        | 5mm lead space          | Tolerance                  |
|---|----------------|-------------------------|-------------------------|----------------------------|
| Lead wire diameter  | d              | 0.5 (0.02), 0.6 (0.025) | 0.5 (0.02), 0.6 (0.025) | ±0.05 (0.002)              |
| Component pitch   | P              | 12.7 (0.5)              | 12.7 (0.5)              | 1.00 (0.04)                |
| Feed hole pitch   | P <sub>0</sub> | 12.7 (0.5)              | 12.7 (0.5)              | ±0.30 (0.01)               |
| Feed hole center to lead                                      | P <sub>1</sub> | 5.08 (0.2)              | 3.81 (0.15)             | ±0.70 (0.03)               |
| Feed hole center to component                                 | P <sub>2</sub> | 6.35 (0.25)             | 6.35 (0.25)             | ±0.70 (0.03)               |
| Lead spacing  | F              | 2.54 (0.10)             | 5.08 (0.20)             | +0.6 (0.02), -0.1 (0.004)  |
| Component alignment   | Δh             | 0                       | 0                       | ±2.00 (0.08)               |
| Tape width  | W              | 18.0 (0.70)             | 18.0 (0.70)             | +1.00 (0.04), -0.50 (0.02) |
| Hold down tape width  | W <sub>0</sub> | 6.0 (0.23)              | 6.0 (0.23)              | ±0.30 (0.01)               |
| Hole position   | W <sub>1</sub> | 9.0 (0.35)              | 9.0 (0.35)              | ±0.50 (0.02)               |
| Hold down tape position                                       | W <sub>2</sub> | 0.50 (0.02)             | 0.50 (0.02)             | Max                        |
| Height to seating plane from tape center (straight leads) (2) | H              | 16 (0.63) to 20 (0.79)  | 16 (0.63) to 20 (0.79)  | As required                |
| Height to seating plane from tape center (formed leads) (2)   | H <sub>0</sub> | 16 (0.63) to 20 (0.79)  | 16 (0.63) to 20 (0.79)  | As required                |
| Height to top of component from tape center                   | H <sub>1</sub> | 32.2 (1.26)             | 32.2 (1.26)             | Max                        |
| Feed hole diameter  | D <sub>0</sub> | 4.0 (0.16)              | 4.0 (0.16)              | ±0.20 (0.008)              |
| Carrier tape plus adhesive tape thickness                     | t              | 0.7 (0.03)              | 0.7 (0.03)              | ±0.20 (0.008)              |
| Carrier tape thickness  | -              | 0.5 (0.02)              | 0.5 (0.02)              | ±0.10 (0.004)              |
| Cut out component snipped lead length from tape center        | L              | 11.0 (0.43)             | 11.0 (0.43)             | Max                        |
| Lead wire protusion from hold down                            | L <sub>2</sub> | 2.0 (0.08)              | 2.0 (0.08)              | Max                        |


## BANDOLIERED REELS

The adhesive tape faces outward. The dispensing direction is as shown. For the protection of the components, a paper inlay is inserted between the windings of the bandolier. At the end of the bandolier, this paper inlay continues for at least a further two rotations.

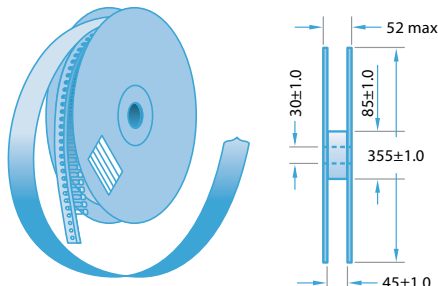

## BANDOLIERED AMMO PACKING

2 carton sizes

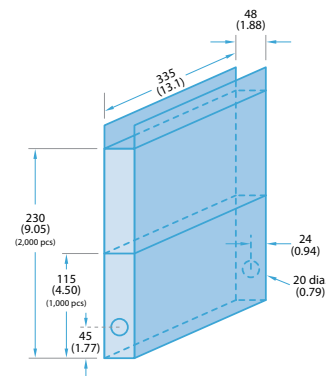


# High Temperature Radial Leaded Capacitors — Epoxy Coated

A range of Radial Leaded capacitors available in sizes 1515 to 7565 designed to operate from -55°C to +200°C in COG/NPO and Class II dielectrics with voltage ratings of 25V to 4kV. These capacitors find typical application in harsh environments such as Oil Exploration and Automotive/Avionics engine compartment circuitry. The epoxy coating ensures environmental protection and a rugged configuration for optimum performance. They are also offered without the conformal coating for less harsh environmental applications.

- Capacitance tolerances:  $\pm 1\%$ \*,  $\pm 2\%$ \*,  $\pm 5\%$ ,  $\pm 10\%$ ,  $\pm 20\%$  (\*COG/NPO only)
- For ordering information, see Novacap High Temperature table on page 93.

## DIMENSIONS — INCHES/MM

| Lead Style |                     | LG with black epoxy coating — LO without |       |       |       |       |       |       |
|------------|---------------------|--|-------|-------|-------|-------|-------|-------|
| Size       |                     | 1515                                     | 1812  | 2520  | 3530  | 4540  | 6560  | 7565  |
| <b>W</b>   | inches:             | 0.250                                    | 0.300 | 0.370 | 0.470 | 0.570 | 0.770 | 0.870 |
|            | mm:                 | 6.35                                     | 7.62  | 9.40  | 11.90 | 14.50 | 19.60 | 22.10 |
| <b>H</b>   | inches:             | 0.250                                    | 0.200 | 0.300 | 0.400 | 0.500 | 0.720 | 0.770 |
|            | mm:                 | 6.35                                     | 5.08  | 7.62  | 10.20 | 12.70 | 18.30 | 19.60 |
| <b>T</b>   | inches:             | 0.190                                    | 0.160 | 0.240 | 0.310 | 0.360 | 0.360 | 0.360 |
|            | mm:                 | 4.83                                     | 4.06  | 6.10  | 7.87  | 9.14  | 9.14  | 9.14  |
| <b>S</b>   | inches $\pm 0.02$ : | 0.170                                    | 0.200 | 0.280 | 0.380 | 0.480 | 0.680 | 0.780 |
|            | mm $\pm 0.508$ :    | 4.32                                     | 5.08  | 7.10  | 9.65  | 12.20 | 17.30 | 19.80 |

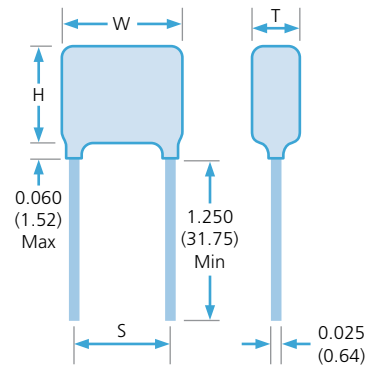

## MAXIMUM CAPACITANCE VALUES — 200°C COG/NPO (D)/CLASS II (E) DIELECTRICS

| Size       | 1515  |          | 1812  |          | 2520  |          | 3530  |          | 4540  |          | 6560  |          | 7565  |          |
|------------|-------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|----------|
| Min cap.   | 5pF   | 150pF    | 22pF  | 150pF    | 39pF  | 1.0nF    | 39pF  | 1.0nF    | 39pF  | 1.0nF    | 56pF  | 2.2nF    | 100pF | 2.2nF    |
| Dielectric | COG   | Class II | COG   | Class II | COG   | Class II | COG   | Class II | COG   | Class II | COG   | Class II | COG   | Class II |
| 25V        | 22nF  | 820nF    | 27nF  | 1.0μF    | 56nF  | 2.2μF    | 100nF | 3.9μF    | 180nF | 5.6μF    | 330nF | 15μF     | 390nF | 18μF     |
| 50V        | 18nF  | 680nF    | 22nF  | 650nF    | 56nF  | 1.8μF    | 82nF  | 2.7μF    | 150nF | 4.7μF    | 270nF | 12μF     | 330nF | 15μF     |
| 100V       | 10nF  | 270nF    | 10nF  | 270nF    | 33nF  | 1.2μF    | 56nF  | 2.2μF    | 100nF | 3.3μF    | 220nF | 8.2μF    | 270nF | 12μF     |
| 250V       | 3.9nF | 82nF     | 6.8nF | 100nF    | 15nF  | 270nF    | 33nF  | 560nF    | 56nF  | 1.2μF    | 120nF | 2.7μF    | 150nF | 3.9μF    |
| 500V       | 2.7nF | 18nF     | 3.3nF | 22nF     | 5.6nF | 56nF     | 12nF  | 120nF    | 27nF  | 330nF    | 56nF  | 680nF    | 68nF  | 820nF    |
| 1kV        | 820pF | 2.7nF    | 1.0nF | 3.3nF    | 1.8nF | 12nF     | 5.6nF | 27nF     | 15nF  | 68nF     | 33nF  | 150nF    | 39nF  | 220nF    |
| 2kV        | 180pF | 560pF    | 220pF | 680pF    | 390pF | 2.2nF    | 1.5nF | 6.8nF    | 3.3nF | 18nF     | 8.2nF | 39nF     | 10nF  | 47nF     |
| 3kV        | 8.2pF | 220pF    | 100pF | 220pF    | 180pF | 820pF    | 560pF | 2.7nF    | 1.5nF | 6.8nF    | 3.3nF | 15nF     | 3.9nF | 18nF     |
| 4kV        | 4.7pF | -        | -     | -        | 100pF | 220pF    | 330pF | 1.2nF    | 820pF | 2.7nF    | 1.8nF | 5.6nF    | 2.2nF | 8.2nF    |



# High Temperature Radial Leded Capacitors — Encapsulated


A range of Radial Leded capacitors available in sizes 1515 to 7565 designed to operate from -55°C to +200°C in COG/NPO and Class II dielectrics. Voltage ratings of 25V to 500V. These capacitors find typical application in very harsh environments where isolation and protection of the device are required for optimum reliability. They are also offered without the molded case for less harsh environmental applications. Consult the Sales Office if your specific requirements exceed our catalog maximums (size, cap. value and voltage).

- Capacitance tolerances:  $\pm 1\%$ ,  $\pm 2\%$ ,  $\pm 5\%$ ,  $\pm 10\%$ ,  $\pm 20\%$  (\*COG/NPO only)
- For ordering information, see Novacap High Temperature table on page 93.

## DIMENSIONS — INCHES/MM

Lead Style LC with encapsulation

| Size   | 1515          | 2520           | 3530           | 4540           | 5550           | 6560           | 7565           |
|--|---------------|----------------|----------------|----------------|----------------|----------------|----------------|
| <b>W</b><br>inches $\pm 0.015$ :<br>mm $\pm 0.381$ : | 0.300<br>7.62 | 0.400<br>10.20 | 0.500<br>12.70 | 0.725<br>18.40 | 0.795<br>20.20 | 0.925<br>23.50 | 1.125<br>28.60 |
| <b>H</b><br>inches $\pm 0.015$ :<br>mm $\pm 0.51$ :  | 0.300<br>7.62 | 0.400<br>10.20 | 0.500<br>12.70 | 0.500<br>12.70 | 0.745<br>18.90 | 0.750<br>19.00 | 0.750<br>19.00 |
| <b>T</b><br>inches $\pm 0.015$ :<br>mm $\pm 0.51$ :  | 0.150<br>3.81 | 0.200<br>5.08  | 0.265<br>6.73  | 0.325<br>8.26  | 0.370<br>9.40  | 0.350<br>8.89  | 0.375<br>9.52  |
| <b>S</b><br>inches $\pm 0.02$ :<br>mm $\pm 0.508$ :  | 0.170<br>4.32 | 0.280<br>7.10  | 0.380<br>9.65  | 0.480<br>12.20 | 0.580<br>14.70 | 0.680<br>17.30 | 0.780<br>19.80 |

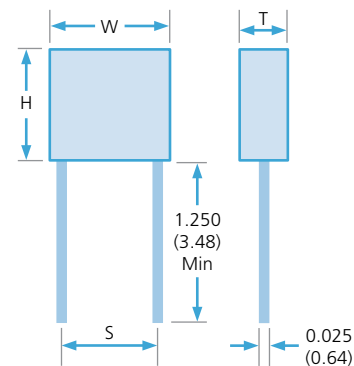

## MAXIMUM CAPACITANCE VALUES — 200°C COG/NPO (D)/CLASS II (E) DIELECTRICS

| Size       | 1515  |          | 2520  |             | 3530  |             | 4540  |             | 5550  |             | 6560  |             | 7565  |             |
|------------|-------|----------|-------|-------------|-------|-------------|-------|-------------|-------|-------------|-------|-------------|-------|-------------|
| Min cap.   | 3.0pF | 220pF    | 39pF  | 1.0nF       | 39pF  | 1.0nF       | 39pF  | 1.0nF       | 39pF  | 1.0nF       | 56pF  | 2.2nF       | 100pF | 2.2nF       |
| Dielectric | COG   | Class II | COG   | Class II    | COG   | Class II    | COG   | Class II    | COG   | Class II    | COG   | Class II    | COG   | Class II    |
| 25V        | 18nF  | 560nF    | 56nF  | 2.2 $\mu$ F | 100nF | 3.9 $\mu$ F | 180nF | 5.6 $\mu$ F | 220nF | 10 $\mu$ F  | 330nF | 15 $\mu$ F  | 390nF | 18 $\mu$ F  |
| 50V        | 15nF  | 390nF    | 56nF  | 1.5 $\mu$ F | 82nF  | 2.7 $\mu$ F | 150nF | 4.7 $\mu$ F | 180nF | 6.8 $\mu$ F | 270nF | 12 $\mu$ F  | 330nF | 15 $\mu$ F  |
| 100V       | 5.6nF | 120nF    | 27nF  | 820nF       | 56nF  | 1.8 $\mu$ F | 100nF | 3.3 $\mu$ F | 150nF | 5.6 $\mu$ F | 220nF | 8.2 $\mu$ F | 270nF | 10 $\mu$ F  |
| 250V       | 3.9nF | 39nF     | 12nF  | 180nF       | 27nF  | 560nF       | 56nF  | 1.2 $\mu$ F | 82nF  | 2.2 $\mu$ F | 120nF | 2.7 $\mu$ F | 150nF | 3.9 $\mu$ F |
| 500V       | 1.5nF | 8.2nF    | 5.6nF | 39nF        | 12nF  | 82nF        | 27nF  | 220nF       | 39nF  | 330nF       | 56nF  | 470nF       | 82nF  | 680nF       |






# Surface Mount EMI Filters — E01 and E07 Ranges



The E01 and E07 ranges of feedthrough MLCC chip "C" filters are 3-terminal chip devices designed to offer reduced inductance compared to conventional MLCCs when used in signal line filtering. The filtered signal passes through the chip internal electrodes and the noise is filtered to the grounded side contacts, resulting in reduced length noise transmission paths.

Available in COG/NP0 (1B) and X7R (2R1) dielectrics, with current ratings of 300mA, 1A, 2A, 3A and voltage ratings of 25Vdc to 200Vdc. Also available with FlexiCap™ termination, which is strongly recommended for new designs.

Commonly used in automotive applications, a range qualified to AEC-Q200 is also available.

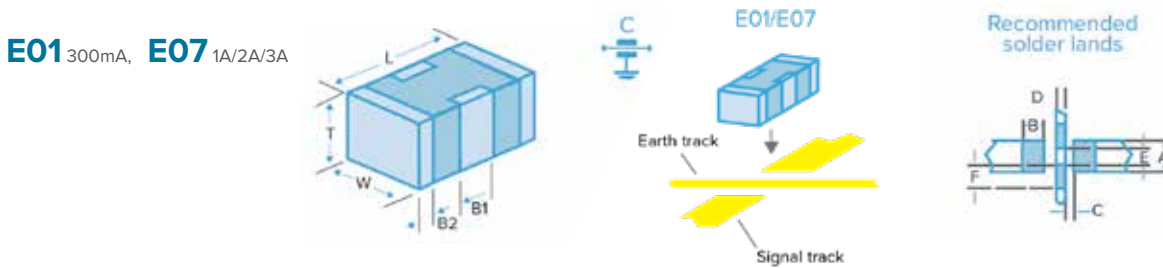

## DIMENSIONS

|           | 0805                          | 1206                          | 1806                          | 1812                           |
|-----------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
| <b>L</b>  | 2.0 ± 0.3<br>(0.079 ± 0.012)  | 3.2 ± 0.3<br>(0.126 ± 0.012)  | 4.5 ± 0.35<br>(0.177 ± 0.014) | 4.5 ± 0.35<br>(0.177 ± 0.014)  |
| <b>W</b>  | 1.25 ± 0.2<br>(0.049 ± 0.008) | 1.6 ± 0.2<br>(0.063 ± 0.008)  | 1.6 ± 0.2<br>(0.063 ± 0.008)  | 3.2 ± 0.3<br>(0.126 ± 0.012)   |
| <b>T</b>  | 1.0 ± 0.15<br>(0.039 ± 0.006) | 1.1 ± 0.2<br>(0.043 ± 0.008)  | 1.1 ± 0.2<br>(0.043 ± 0.008)  | 2.0 ± 0.3<br>(0.079 ± 0.012)   |
| <b>B1</b> | 0.60 ± 0.2<br>(0.024 ± 0.008) | 0.95 ± 0.3<br>(0.037 ± 0.012) | 1.4 ± 0.3<br>(0.055 ± 0.012)  | 1.45 ± 0.35<br>(0.055 ± 0.014) |
| <b>B2</b> | 0.3 ± 0.15<br>(0.012 ± 0.006) | 0.5 ± 0.25<br>(0.02 ± 0.01)   | 0.5 ± 0.25<br>(0.02 ± 0.01)   | 0.75 ± 0.25<br>(0.03 ± 0.01)   |

|          | 0805         | 1206         | 1806         | 1812         |
|----------|--------------|--------------|--------------|--------------|
| <b>A</b> | 0.95 (0.037) | 1.20 (0.047) | 1.2 (0.047)  | 2.65 (0.104) |
| <b>B</b> | 0.90 (0.035) | 0.90 (0.035) | 1.40 (0.055) | 1.40 (0.055) |
| <b>C</b> | 0.30 (0.012) | 0.60 (0.024) | 0.80 (0.031) | 0.80 (0.031) |
| <b>D</b> | 0.40 (0.016) | 0.80 (0.031) | 1.40 (0.055) | 1.40 (0.055) |
| <b>E</b> | 0.75 (0.030) | 1.0 (0.039)  | 1.0 (0.039)  | 2.05 (0.080) |
| <b>F</b> | 0.56 (0.022) | 0.70 (0.028) | 0.70 (0.028) | 1.08 (0.043) |

**Notes:** 1) All dimensions mm (inches). 2) Pad widths less than chip width gives improved mechanical performance. 3) The solder stencil should place 4 discrete solder pads. The unprinted distance between ground pads is shown as dim E. 4) Insulating the earth track underneath the filters is acceptable and can help avoid displacement of filter during soldering but can result in residue entrapment under the chip.

## STANDARD RANGE (E01, E07) — CAPACITANCE VALUES

| TYPE               |              | E01                                    |               |               | E07           |              |               |               |
|--------------------|--------------|--|---------------|---------------|---------------|--------------|---------------|---------------|
| Chip Size          |              | 0805                                   | 1206          | 1806          | 0805          | 1206         | 1806          | 1812          |
| <b>Max Current</b> |              | 300mA                                  | 300mA         | 300mA         | 1A            | 2A           | 2A            | 3A            |
| Rated Voltage      | Dielectric   | Minimum and maximum capacitance values |               |               |               |              |               |               |
| 25Vdc              | COG/NP0 (1B) | 180pF - 1.5nF                          | 560pF - 3.9nF | 820pF - 4.7nF | 180pF - 1.5nF | 560pF-3.9nF  | 820pF-4.7nF   | -             |
|                    | X7R (2R1)    | 470pF - 100nF                          | 5.6nF - 330nF | 3.9nF - 560nF | 820pF - 100nF | 10nF - 330nF | 22nF - 560nF  | 560nF - 1.8µF |
| 50Vdc              | COG/NP0 (1B) | 22pF - 820pF                           | 22pF - 3.3nF  | 22pF - 3.9nF  | 10pF - 220pF  | 22pF - 1nF   | 100pF - 1.5nF | -             |
|                    | X7R (2R1)    | 560pF - 68nF                           | 4.7nF - 220nF | 3.3nF - 330nF | 1nF - 68nF    | 10nF - 220nF | 22nF - 330nF  | 330nF - 1.5µF |
| 100Vdc             | COG/NP0 (1B) | 22pF - 560pF                           | 22pF - 2.2nF  | 22pF - 3.3nF  | 10pF - 120pF  | 22pF - 560pF | 100pF - 680pF | -             |
|                    | X7R (2R1)    | 560pF - 27nF                           | 1.8nF - 100nF | 3.3nF - 180nF | 1nF - 27nF    | 10nF - 100nF | 22nF - 180nF  | 180nF - 820nF |
| 200Vdc             | COG/NP0 (1B) | -                                      | 560pF - 1.2nF | 56pF - 1nF    | -             | 15pF - 180pF | 56pF - 470pF  | -             |
|                    | X7R (2R1)    | -                                      | 2.7nF - 56nF  | 3.9nF - 100nF | -             | 12nF - 56nF  | 22nF - 100nF  | 100nF - 270nF |

**Note:** E07 25Vdc COG/NP0 (1B) 1206 and 1806 ranges in green, have a maximum current of 1A.



# Surface Mount EMI Filters — E01 and E07 Ranges



## AEC-Q200 RANGE (E01, E07) — CAPACITANCE VALUES


| TYPE      |              | E01          |               |               | E07          |              |               |
|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|
| Chip Size |              | 0805         | 1206          | 1806          | 0805         | 1206         | 1806          |
| 50V       | C0G/NPO (1B) | 22pF - 820pF | 22pF - 1nF    | 22pF - 2.2nF  | 10pF - 220pF | 22pF - 1nF   | 100pF - 1.5nF |
|           | X7R (2R1)    | 560pF - 47nF | 4.7nF - 100nF | 3.3nF - 200nF | 1nF - 47nF   | 10nF - 100nF | 22nF - 200nF  |
| 100V      | C0G/NPO (1B) | 22pF - 560pF | 22pF - 1nF    | 22pF - 2.2nF  | 10pF - 120pF | 22pF - 560pF | 100pF - 680pF |
|           | X7R (2R1)    | 560pF - 15nF | 1.8nF - 15nF  | 3.3nF - 68nF  | 1nF - 15nF   | 10nF - 15nF  | 22nF - 68nF   |

Notes: Blue background = AEC-Q200. For some lower capacitance parts, higher voltage rated parts may be supplied.

## OPEN BOARD INSERTION LOSS PERFORMANCE IN 50Ω SYSTEM

### OPEN BOARD PERFORMANCE

| Cap.  | 0.1MHz | 1MHz | 10MHz | 100MHz | 1GHz | Resonance Freq (MHz) approx. |
|-------|--------|------|-------|--------|------|------------------------------|
| 10pF  | 0      | 0    | 0     | 0      | 7.5  | 2200                         |
| 22pF  | 0      | 0    | 0     | 0      | 16   | 1600                         |
| 33pF  | 0      | 0    | 0     | 1      | 22   | 1350                         |
| 47pF  | 0      | 0    | 0     | 2      | 28   | 1150                         |
| 68pF  | 0      | 0    | 0     | 3      | 41   | 900                          |
| 100pF | 0      | 0    | 0     | 5      | 28   | 800                          |
| 150pF | 0      | 0    | 0     | 8      | 24   | 700                          |
| 220pF | 0      | 0    | 0     | 12     | 20   | 600                          |
| 330pF | 0      | 0    | 1     | 15     | 20   | 500                          |
| 470pF | 0      | 0    | 2     | 18     | 20   | 425                          |
| 560pF | 0      | 0    | 3     | 20     | 20   | 350                          |
| 680pF | 0      | 0    | 4     | 22     | 20   | 300                          |
| 820pF | 0      | 0    | 5     | 24     | 20   | 260                          |
| 1nF   | 0      | 0    | 7     | 27     | 20   | 220                          |
| 1.5nF | 0      | 0    | 9     | 31     | 20   | 200                          |
| 2.2nF | 0      | 0    | 12    | 34     | 20   | 170                          |
| 3.3nF | 0      | 1    | 14    | 39     | 20   | 135                          |
| 4.7nF | 0      | 2    | 18    | 46     | 20   | 110                          |
| 6.8nF | 0      | 3    | 21    | 50     | 20   | 90                           |
| 10nF  | 0      | 5    | 24    | 48     | 20   | 80                           |
| 15nF  | 0      | 8    | 27    | 45     | 20   | 65                           |
| 22nF  | 0      | 12   | 31    | 43     | 20   | 56                           |
| 33nF  | 1      | 14   | 34    | 40     | 20   | 40                           |
| 47nF  | 2      | 17   | 38    | 40     | 20   | 34                           |
| 68nF  | 4      | 20   | 41    | 40     | 20   | 30                           |
| 100nF | 5      | 24   | 45    | 40     | 20   | 28                           |
| 150nF | 8      | 26   | 48    | 40     | 20   | 24                           |
| 220nF | 10     | 30   | 52    | 40     | 20   | 17                           |
| 330nF | 13     | 33   | 55    | 40     | 20   | 15.5                         |
| 470nF | 16     | 36   | 60    | 40     | 20   | 14                           |
| 560nF | 18     | 39   | 65    | 40     | 20   | 12                           |

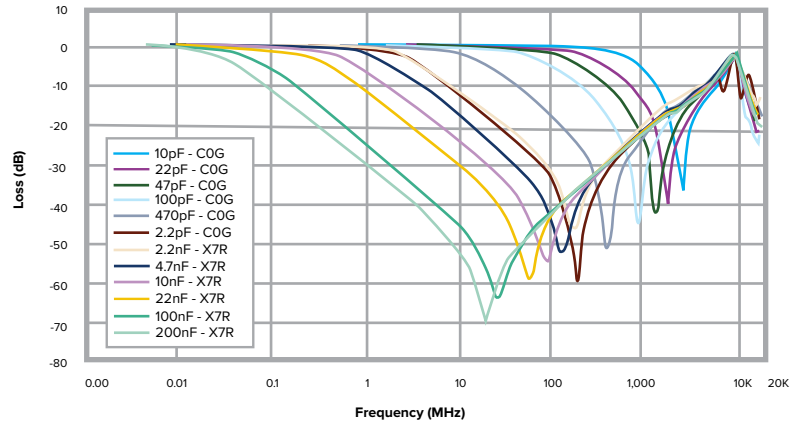

## ORDERING INFORMATION — E01 AND E07 FEEDTHROUGH CAPACITORS

| 1206                         | Y  | 100  | 0103  | M         | X  | T   | E07        |
|------------------------------|--|--|---|-----------|--|---|------------|
| Chip Size                    | Termination  | Voltage  | Capacitance in Picofarads (pF)  | Tolerance | Dielectric   | Packaging   | Type       |
| 0805<br>1206<br>1806<br>1812 | J = Nickel Barrier (Tin)<br>Y = FlexiCap™ (Tin - X7R (2R1) only)<br>A = (Tin/Lead)<br>Not RoHS compliant.<br>H = FlexiCap™ (Tin/Lead)<br>Not RoHS compliant. | 025 = 25V<br>050 = 50V<br>100 = 100V<br>200 = 200V | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following.<br>Example: 0103 = 10000pF. | M = ±20%  | A = C0G/NPO (1B) to AEC-Q200<br>E = X7R (2R1) to AEC-Q200<br><br>C = C0G/NPO (1B)<br>X = X7R (2R1) | T = 178mm (7") reel<br>R = 330mm (13") reel<br>B = Bulk | E01<br>E07 |

Notes: A, Y and H terminations are not available for dielectric codes A and C.

J and A terminations are not available for dielectric code E.

Please contact your Knowles Precision Devices sales office for any special requirements.

## REELED QUANTITIES

|                  | 0805   | 1206   | 1806   | 1812  |
|------------------|--------|--------|--------|-------|
| 178mm (7") reel  | 3,000  | 2,500  | 2,500  | 1,000 |
| 330mm (13") reel | 12,000 | 10,000 | 10,000 | 4,000 |

# Surface Mount EMI Filters — E03 X2Y Integrated Passive Components



The X2Y Integrated Passive Component is a 3-terminal EMI chip device.

When used in balanced line applications, the revolutionary design provides simultaneous line-to-line and line-to-ground filtering, using a single ceramic chip. In this way, differential and common mode filtering are provided in one device.

For unbalanced applications, it provides ultra-low ESL (equivalent series inductance). Capable of replacing two or more conventional devices, it is ideal for balanced and unbalanced lines, twisted pairs and dc motors, in automotive, audio, sensor and other applications.

Available in sizes from 0805 to 1812, these filters can prove invaluable in meeting stringent EMC demands.

|  |  |  |  |
|--|--|--|--|
| <b>Dielectric:</b><br>X7R (2R1) or COG/NP0 (1B)          | <b>Capacitance measurement:</b><br>At 1,000-hr point                                     | <b>Temperature rating:</b><br>-55°C to +125°C                            | <b>Dielectric withstand voltage:</b><br>≤200V 2.5 times rated Volts for 5 secs. 500V 1.5 times rated Volts for 5 secs. Charging current limited to 50mA Max. |
| <b>Electrical configuration:</b><br>Multiple capacitance | <b>Typical capacitance matching:</b><br>Better than 5% (down to 1% available on request) | <b>Insulation resistance:</b><br>100GΩ or 1000s (whichever is the least) |  |

## STANDARD RANGE (E03) — CAPACITANCE VALUES

| TYPE          |              | E03           |               |               |               |
|---------------|--------------|---------------|---------------|---------------|---------------|
| Chip Size     |              | 0805          | 1206          | 1410          | 1812          |
| Rated Voltage | Dielectric   |               |               |               |               |
|               | COG/NP0 (1B) | 560pF - 820pF | 1.8nF - 3.3nF | 6.8nF - 8.2nF | 12nF - 15nF   |
| 25Vdc         | X7R (2R1)    | 56nF - 68nF   | -             | 470nF - 470nF | 820nF - 820nF |
|               | COG/NP0 (1B) | 390pF - 470pF | 1.2nF - 1.5nF | 4.7nF - 5.6nF | 8.2nF - 10nF  |
| 50Vdc         | X7R (2R1)    | 18nF - 47nF   | 56nF - 220nF  | 180nF - 400nF | 390nF - 680nF |
|               | COG/NP0 (1B) | 10pF - 330pF  | 22pF - 1nF    | 100pF - 3.9nF | 820pF - 6.8nF |
| 100Vdc        | X7R (2R1)    | 470pF - 15nF  | 1.5nF - 47nF  | 4.7nF - 150nF | 8.2nF - 330nF |
|               | COG/NP0 (1B) | -             | 22pF - 1nF    | 100pF - 3.3nF | 820pF - 5.6nF |
| 200Vdc        | X7R (2R1)    | -             | 820pF - 33nF  | 1.2nF - 120nF | 2.7nF - 180nF |
|               | COG/NP0 (1B) | -             | -             | -             | 820pF - 3.9nF |
| 500Vdc        | X7R (2R1)    | -             | -             | -             | 2.7nF - 100nF |


|           | 0805                           | 1206                          | 1410                          | 1812                           |
|-----------|--------------------------------|-------------------------------|-------------------------------|--------------------------------|
| <b>L</b>  | 2.0 ± 0.3<br>(0.079 ± 0.012)   | 3.2 ± 0.3<br>(0.126 ± 0.012)  | 3.6 ± 0.3<br>(0.14 ± 0.012)   | 4.5 ± 0.35<br>(0.177 ± 0.014)  |
| <b>W</b>  | 1.25 ± 0.2<br>(0.049 ± 0.008)  | 1.6 ± 0.2<br>(0.063 ± 0.008)  | 2.5 ± 0.3<br>(0.1 ± 0.012)    | 3.2 ± 0.3<br>(0.126 ± 0.012)   |
| <b>T</b>  | 1.0 ± 0.15<br>(0.039 ± 0.006)  | 1.1 ± 0.2<br>(0.043 ± 0.008)  | 2.0 max.<br>(0.08 max.)       | 2.1 max.<br>(0.083 max.)       |
| <b>B1</b> | 0.50 ± 0.25<br>(0.020 ± 0.010) | 0.95 ± 0.3<br>(0.037 ± 0.012) | 1.20 ± 0.3<br>(0.047 ± 0.012) | 1.45 ± 0.35<br>(0.055 ± 0.014) |
| <b>B2</b> | 0.3 ± 0.15<br>(0.012 ± 0.006)  | 0.5 ± 0.25<br>(0.02 ± 0.01)   | 0.5 ± 0.25<br>(0.02 ± 0.01)   | 0.75 ± 0.25<br>(0.03 ± 0.01)   |

**Note:** For some lower capacitance parts, higher voltage rated parts may be supplied.

## AEC-Q200 RANGE (E03) — CAPACITANCE VALUES


| Chip Size |              | 0805          | 1206          | 1410          | 1812          |
|-----------|--------------|---------------|---------------|---------------|---------------|
| 50Vdc     | COG/NP0 (1B) | 390pF - 470pF | 1.2nF - 1.5nF | 4.7nF - 5.6nF | 8.2nF - 10nF  |
|           | X7R (2R1)    | 18nF - 33nF   | 56nF - 150nF  | 180nF - 330nF | 390nF - 560nF |
| 100Vdc    | COG/NP0 (1B) | 10pF - 330pF  | 22pF - 1nF    | 100pF - 3.9nF | 820pF - 6.8nF |
|           | X7R (2R1)    | 470pF - 15nF  | 1.5nF - 47nF  | 4.7nF - 150nF | 8.2nF - 330nF |

**Note:** Blue background = AEC-Q200.



# Surface Mount EMI Filters — E03 X2Y Integrated Passive Components

Recommended solder lands




|   | 0805         | 1206        | 1410         | 1812         |
|---|--------------|-------------|--------------|--------------|
| A | 0.95 (0.037) | 1.2 (0.047) | 2.05 (0.08)  | 2.65 (0.104) |
| B | 0.9 (0.035)  | 0.9 (0.035) | 1.0 (0.040)  | 1.4 (0.055)  |
| C | 0.3 (0.012)  | 0.6 (0.024) | 0.7 (0.028)  | 0.8 (0.031)  |
| D | 0.4 (0.016)  | 0.8 (0.031) | 0.9 (0.035)  | 1.4 (0.055)  |
| E | 0.75 (0.030) | 1.0 (0.039) | 1.85 (0.071) | 2.05 (0.080) |
| F | 0.56 (0.022) | 0.7 (0.028) | 0.79 (0.031) | 1.08 (0.043) |


## COMPONENT ADVANTAGES DISADVANTAGES APPLICATIONS

| COMPONENT                                     | ADVANTAGES  | DISADVANTAGES   | APPLICATIONS  |
|---|---|---|---|
| <b>Chip capacitor</b>                         | <ul style="list-style-type: none"> <li>Industry standard</li> </ul>   | <ul style="list-style-type: none"> <li>Requires 1 per line</li> <li>High inductance</li> <li>Capacitance matching problems</li> </ul> | <ul style="list-style-type: none"> <li>Bypass</li> <li>Low frequency</li> </ul>   |
| <b>3-Terminal feedthrough</b>                 | <ul style="list-style-type: none"> <li>Feedthrough</li> <li>Lower inductance</li> </ul>   | <ul style="list-style-type: none"> <li>Current limited</li> </ul>   | <ul style="list-style-type: none"> <li>Feedthrough</li> <li>Unbalanced lines</li> <li>High frequency</li> </ul>   |
| <b>Syfer X2Y Integrated Passive Component</b> | <ul style="list-style-type: none"> <li>Very low inductance</li> <li>Replaces 2 (or 3) components</li> <li>Negates the effects of temperature, voltage and aging</li> <li>Provides both common mode and differential mode attenuation</li> <li>Can be used on balanced and unbalanced lines</li> </ul> | <ul style="list-style-type: none"> <li>Care must be taken to optimize circuit design</li> </ul>                                       | <ul style="list-style-type: none"> <li>Bypass</li> <li>Balanced lines</li> <li>High frequency DC electric motors</li> <li>Unbalanced lines</li> <li>Audio amplifiers</li> <li>CANBUS</li> </ul> |


## FILTERING APPLICATION

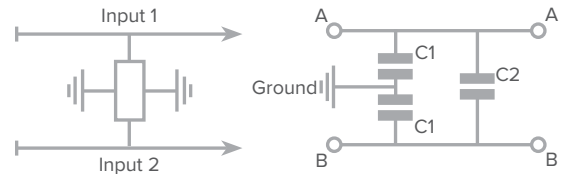


## DECOUPLING APPLICATION

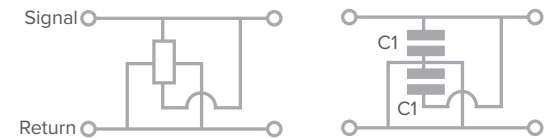

## FILTERING APPLICATION

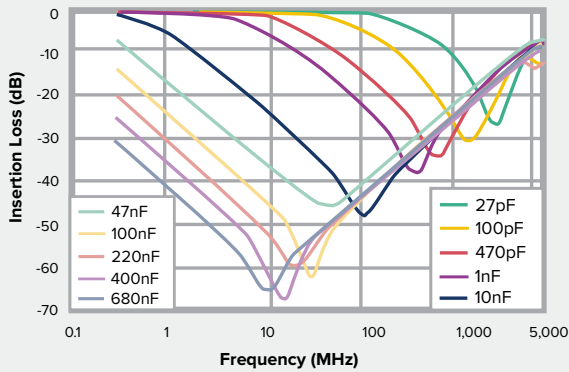

## DECOUPLING APPLICATION

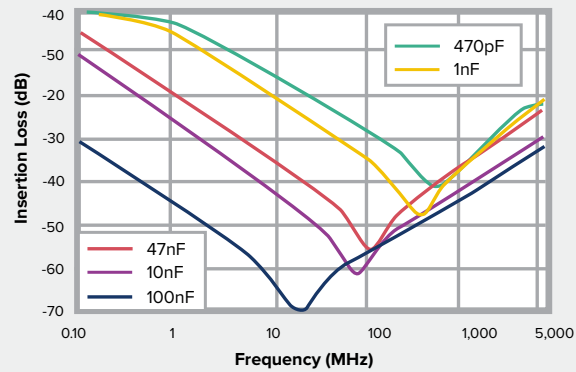

## ORDERING INFORMATION — X2Y IPC RANGE

| Chip Size                    | Termination   | Voltage   | Capacitance in Picofarads (pF) C1  | Tolerance   | Dielectric   | Packaging   | Type                             |
|------------------------------|---|---|--|---|--|---|----------------------------------|
| 0805<br>1206<br>1410<br>1812 | J = Nickel Barrier (Tin)<br>Y = FlexiCap™ (Tin - X7R (2R1) only)<br>A = (Tin/Lead)<br>H = FlexiCap™ (Tin/Lead)<br>Not RoHS compliant. | 025 = 25V<br>050 = 50V<br>100 = 100V<br>200 = 200V<br>500 = 500 | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following<br>Example: 0334 = 330nF.<br>Note: C1 = 2C2 | M = ±20%<br><br>(Tighter tolerances may be available on request). | A = COG/NP0 (1B) to AEC-Q200<br>E = X7R (2R1) to AEC-Q200<br><br>C = COG/NP0 (1B)<br>X = X7R (2R1) | T = 178mm (7") reel<br><br>R = 330mm (13") reel<br><br>B = Bulk | X2Y Integrated Passive Component |

## REELED QUANTITIES

|      | 178mm (7") reel | 330mm (13") reel |
|------|-----------------|------------------|
| 0805 | 3,000           | 12,000           |
| 1206 | 2,500           | 10,000           |
| 1410 | 2,000           | 8,000            |
| 1812 | 500             | 2,000            |

Notes: 1) A, Y and H terminations are not available for dielectric codes A and C. 2) J and A terminations are not available for dielectric code E.  
3) Please contact your Knowles Precision Devices sales office for any special requirements.



Knowles Capacitors designs, manufactures and sells special electronic components. Our products are used in military, space, telecom infrastructure, medical and industrial applications where function and reliability are crucial.



Knowles (Cazenovia)  
2777 Route 20 East, Cazenovia,  
NY 13035 USA  
Phone: +1 315 655 8710  
Fax: +1 315 655 0445  
KCCSales@knowles.com



Knowles (Cazenovia)  
2777 Route 20 East, Cazenovia,  
NY 13035 USA  
Phone: +1 315 655 8710  
Fax: +1 315 655 0445  
KCCSales@knowles.com



Knowles (Valencia)  
25111 Anza Drive, Valencia,  
CA 91355 USA  
Phone: +1 661 295 5920  
Fax: +1 661 295 5928  
NovacapSales@knowles.com



Knowles (UK) Ltd  
Hethel Engineering Centre, Chapman Way,  
Hethel, Norwich, Norfolk NR14 8FB  
Phone: +44 1603 723300  
Fax: +44 1603 723301  
SyferSales@knowles.com



Knowles (Cazenovia)  
2777 Route 20 East, Cazenovia,  
NY 13035 USA  
Phone: +1 315 655 8710  
Fax: +1 315 655 0445  
VoltronicsSales@knowles.com



# Our Other Products

---

Air Capacitors

Discoidal Capacitors

EMI Filters

Feedthrough EMI Filters

Gain Equalizers

Half-Turn Trimmers

Hi-Cap Capacitors

Hi-Rel Products

Hi-Rel and Specialty Products

Lead Capacitors

Loaded Capacitors

Opti-Cap Capacitors

Planar Arrays

Pulse Capacitors

Special Discrete Filters

Special Filters

Speciality Products

Stacked Chips

Trimmers


Trimmer Capacitors

Varistor Filters

X8R Capacitors

250Vac Chips

500Vac X7R Chips

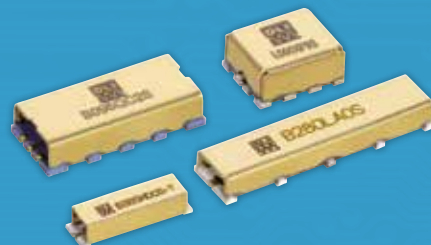



Scan here  
to follow us on WeChat

---

**Asian Sales Office**

T: +86 512 62588258

F: +86 512 62589258

E: [KPD-Asia-sales@knowles.com](mailto:KPD-Asia-sales@knowles.com)

**European Sales Office**

T: +44 1603 723300

F: +44 1603 723301

E: [KPD-Europe-sales@knowles.com](mailto:KPD-Europe-sales@knowles.com)

**North American Sales Office**

T: +1 661 295 5920

F: +1 661 295 5928

T: +1 315 655 8710

F: +1 315 655 0445

E: [KPD-NA-sales@knowles.com](mailto:KPD-NA-sales@knowles.com)