

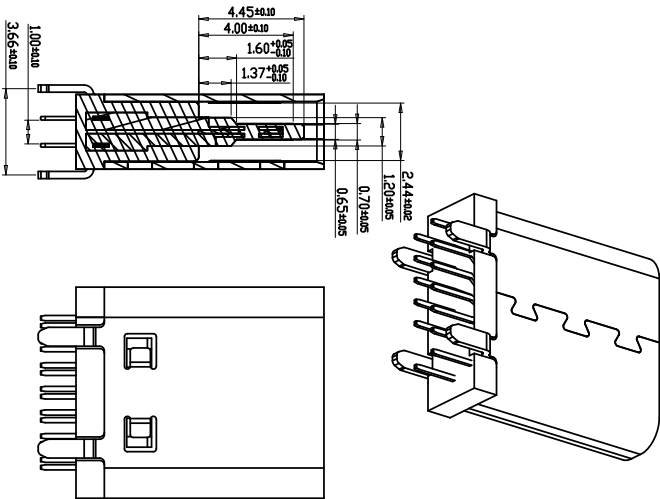
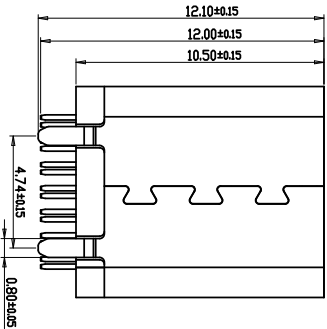


RoHS

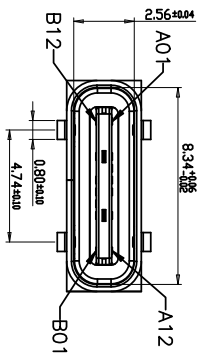


- NOTES:
1. MATERIAL: SEE "TABLE 1";
  2. FINISH: SEE "TABLE 1";

3. ELECTRICAL :
  - 3-1. CONTACT CURRENT RATING :
    - 3A (VBUS PIN 1, 5A/PIN MAX),
    - 3A (GND PIN 1, 25A/PIN MAX), 0.25A/PIN (OTHER PIN).
  - 3-2. INSULATION RESISTANCE :
    - 100 MEGAOHMS MIN. AT 250VDC.
  - 3-3. DIELECTRIC WITHSTANDING VOLTAGE :
    - 100VAC MIN.
  - 3-4. LOW LEVEL CONTACT RESISTANCE :
    - INITIAL 40mΩ MAX.
    - AFTER 50mΩ MAX.

4. MECHANICAL CHARACTERISTICS :
  - 4-1. MATING FORCE: 5~20N ;
  - 4-2. UNMATING FORCE: 6~20N (INITIAL), 6~20N (AFTER 10000 CYCLES) ;
  - 4-3. DURABILITY : 10,000 MATING CYCLES.
  - 4-4. OPERATING TEMPERATURE : -40° C TO +80° C

截面 1-1

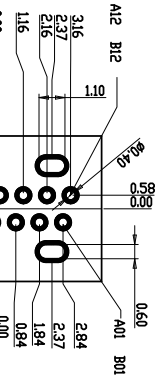

RECOMMENDED P.C.B. LAYOUT (T1.00mm)  
TOLERANCE UNSPECIFIED ±0.5mm

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
④	Shell	1	SUS 304	NI PLATING	T=0.20mm
③	MID PLATE	1	SUS 304	C2680	T=0.15mm
②	Terminal	16	LCP 1301	CP	T=0.15mm
①	Housing	3	LCP 1301	CP	

<p>产品图</p> <p>公差一覽表</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p>		<p>单位</p> <p>MM</p>		<p>制图</p> <p>林展升</p>		<p>制图料号</p> <p>918-468R2029B50000P1N</p>	
X.	±0.25	X.	±5.°	比例	1:1	审核	郭治富
.XX	±0.15	.XX	±1.°	日期	2020-06-22	核准	黄国荣
.XXX	±0.10	.XXX	±0.5°	DATE		角法	版本
						VER	A0

深圳市精拓金电子有限公司  
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

MAPX	MODIFICATION	DRW	DATE