


»Features

- For surface mounted applications
- Metal silicon junction,majority carrier conduction
- Low power loss,high efficiency
- Built-in strain relief,ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:
250 °C/10 seconds at terminals

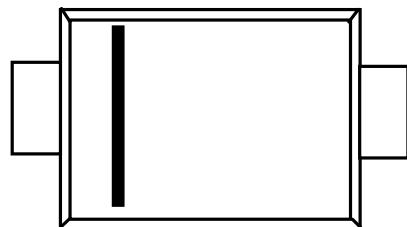

»General Description

SMA(DO-214AC)

- Case: JEDEC DO -214AC molded plastic
- Terminals: Axial leads. Solderable per MIL - STD - 750 Method 2026
- Polarity: Color band denotes cathode
- Mounting Position: Any

» Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half wave 60HZ. resistive or inductive load. For capacitive load current derate by 20%

Characteristic	Symbol	SS22	SS23	SS24	SS25	SS26	SS28	SS210	SS220	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	20	30	40	50	60	80	100	200	V
RMS Reverse Voltage	V _R (RMS)	14	21	28	35	42	56	70	140	V
Average Rectified Output Current @T _L = 75°C	I _O						2.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}						50			A
Forward Voltage @I _F = 2.0A	V _{FM}		0.55		0.70		0.85		0.95	V
Peak Reverse Current @T _A = 25°C At Rated DC Blocking Voltage @T _A = 100°C	I _{RM}				0.5	20				mA
Typical Thermal Resistance (Note 1)	R _{θJL} R _{θJA}				28	88				°C/W
Operating Temperature Range	T _j				-65 to +125					°C
Storage Temperature Range	T _{STG}				-65 to +150					°C

NOTE: Measured at 1.0MHz and applied reverse voltage of 4.0V DC

»**Typical Performance Characteristics** ($T_J = 25^\circ\text{C}$, unless otherwise noted)

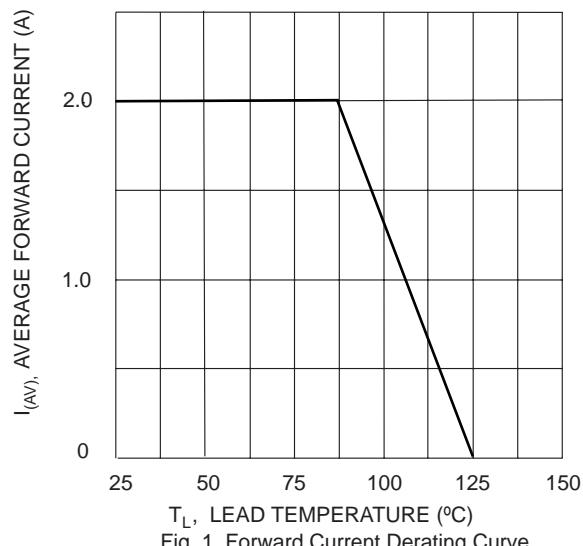


Fig. 1 Forward Current Derating Curve

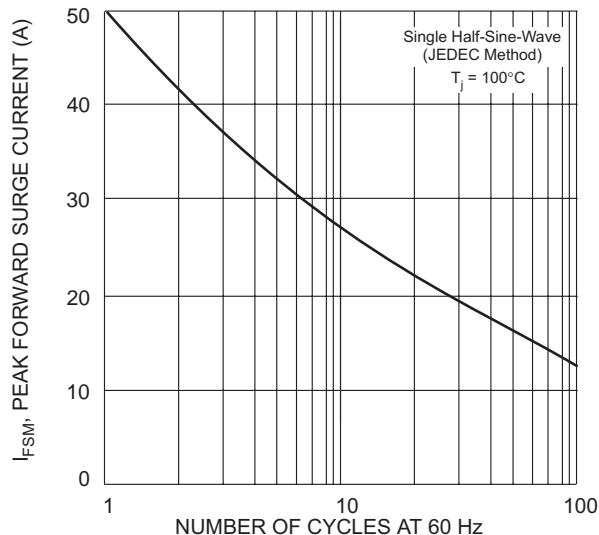


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

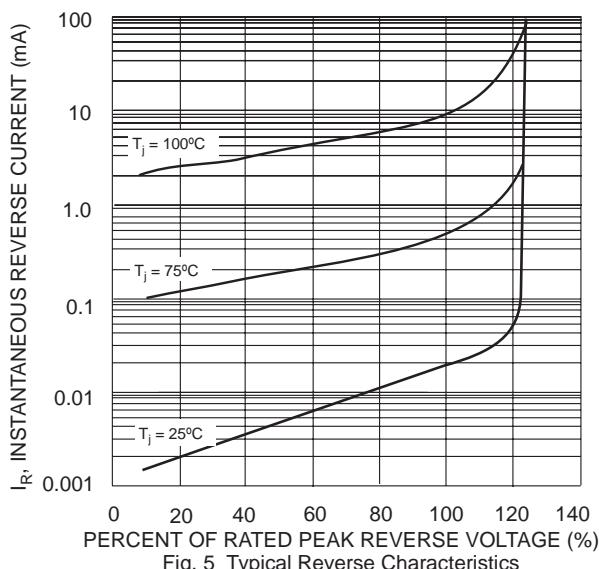


Fig. 5 Typical Reverse Characteristics

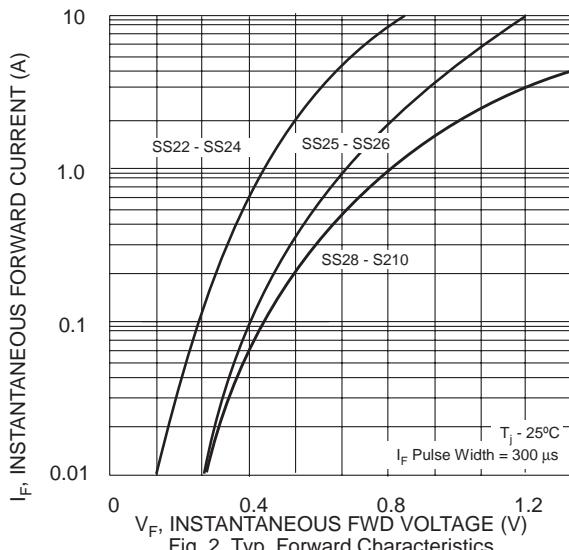


Fig. 2 Typ. Forward Characteristics


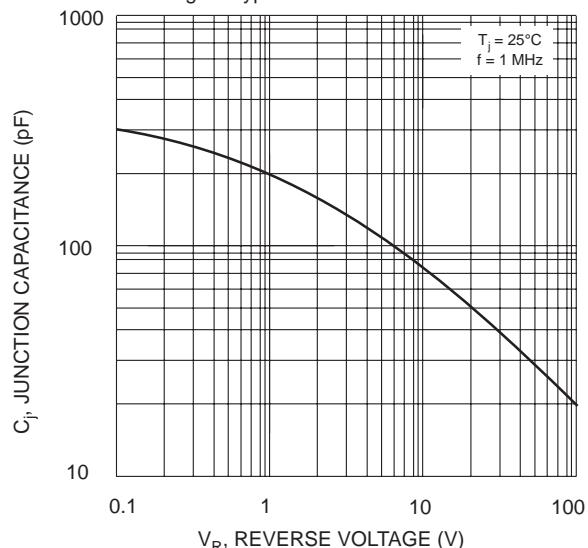


Fig. 4 Typical Junction Capacitance

»Package Information

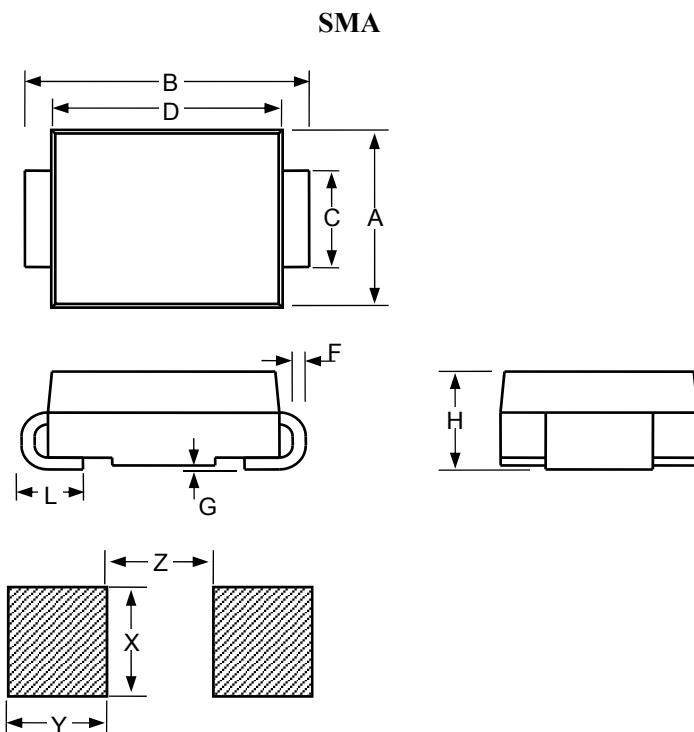

Dimension	Inches			Millimeters		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.1		0.11	2.54		2.8
B	0.194		0.223	4.93		5.66
C	0.051		0.067	1.3		1.7
D	0.157		0.177	3.99		4.5
F	0.006		0.012	0.152		0.305
G	-		0.008	-		0.203
H	0.078		0.095	1.98		2.42
L	0.03		0.06	0.76		1.52
X		0.085			2.16	
Y		0.07			1.78	
Z		0.079			2	

»Ordering information

Part Number	SS22	SS23	SS24	SS25	SS26	SS28	SS210	SS220
Marking	SS22	SS23	SS24	SS25	SS26	SS28	SS210	SS220
Base qty	5K	5K						