

## Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 200 V Forward Current - 5.0A

### Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

### MECHANICAL DATA

- Case: SMA
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 60mg / 0.0021oz

### Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode




Top View  
Marking Code: SS52~SS520  
Simplified outline SMA and symbol


Parameter	Symbols	SS52G	SS54G	SS56G	SS58G	SS510G	SS512G	SS515G	SS520G	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	$V_{RMS}$	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0							A	
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	120				100				A
Max Instantaneous Forward Voltage at 5 A	$V_F$	0.55		0.70		0.85				V
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Reverse Voltage $T_a = 100^\circ C$	$I_R$	1.0 50							mA	
Typical Junction Capacitance <sup>(1)</sup>	$C_j$	500		300						
Typical Thermal Resistance <sup>(2)</sup>	$R_{\theta JA}$	60							°C/W	
Operating Junction Temperature Range	$T_j$	-55 ~ +150							°C	
Storage Temperature Range	$T_{stg}$	-55 ~ +150							°C	

( 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C.      ( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


**Fig.1 Forward Current Derating Curve**

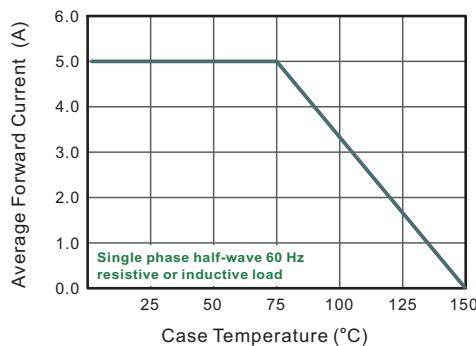


**Fig.2 Typical Reverse Characteristics**

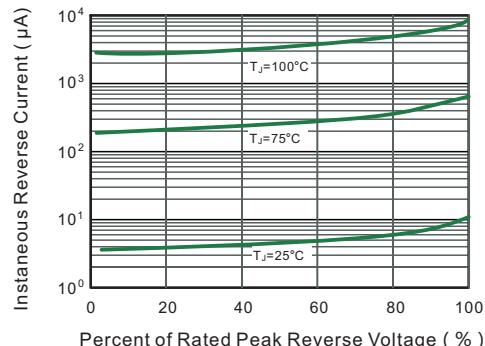


**Fig.3 Typical Forward Characteristic**

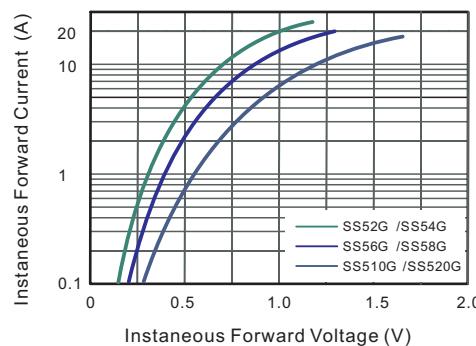


**Fig.4 Typical Junction Capacitance**

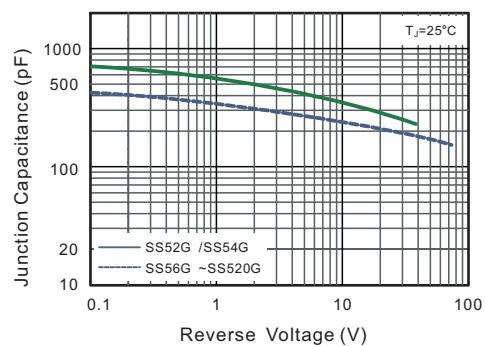

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

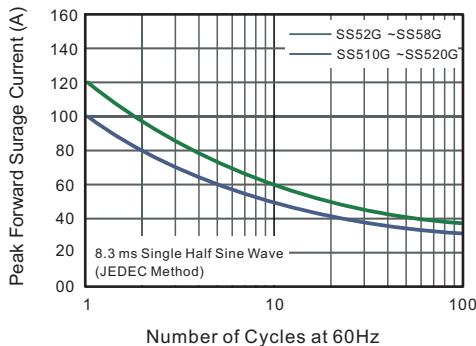


**Fig.6- Typical Transient Thermal Impedance**

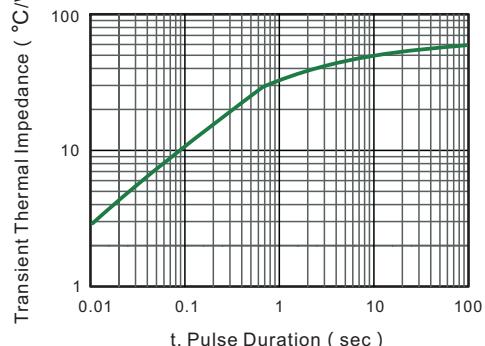


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMA

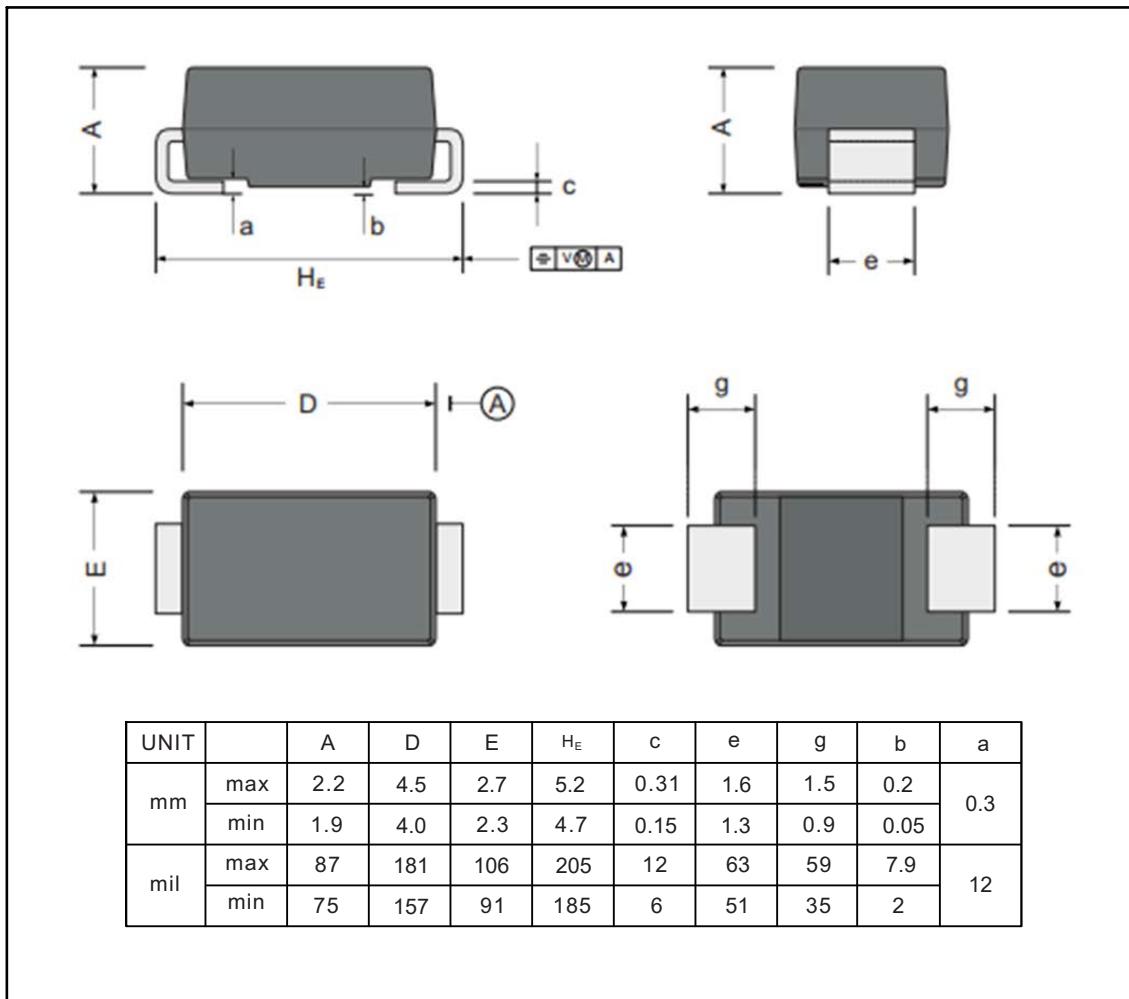

The recommended mounting pad size

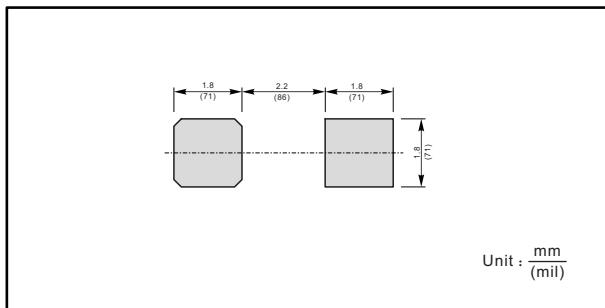

Marking

Type number	Marking code
SS52G	SS52
SS54G	SS54
SS56G	SS56
SS58G	SS58
SS510G	SS510
SS512G	SS512
SS515G	SS515
SS520G	SS520