



Circuit breaker size S2 for transformer protection A-release 12...17 A N-release 410 A screw terminal Standard switching capacity

|                                                                                            |                            |
|--------------------------------------------------------------------------------------------|----------------------------|
| <b>product brand name</b>                                                                  | SIRIUS                     |
| <b>product designation</b>                                                                 | Circuit breaker            |
| <b>design of the product</b>                                                               | For transformer protection |
| <b>product type designation</b>                                                            | 3RV2                       |
| <b>General technical data</b>                                                              |                            |
| <b>size of the circuit-breaker</b>                                                         | S2                         |
| <b>size of contactor can be combined company-specific</b>                                  | S2                         |
| product extension auxiliary switch                                                         | Yes                        |
| <b>power loss [W] for rated value of the current</b>                                       |                            |
| • at AC in hot operating state                                                             | 14.5 W                     |
| • at AC in hot operating state per pole                                                    | 4.8 W                      |
| insulation voltage with degree of pollution 3 at AC rated value                            | 690 V                      |
| <b>surge voltage resistance rated value</b>                                                | 6 kV                       |
| shock resistance according to IEC 60068-2-27                                               | 25g / 11 ms Sinus          |
| <b>mechanical service life (switching cycles)</b>                                          |                            |
| • of the main contacts typical                                                             | 50 000                     |
| • of auxiliary contacts typical                                                            | 50 000                     |
| electrical endurance (switching cycles) typical                                            | 50 000                     |
| <b>reference code according to IEC 81346-2</b>                                             | Q                          |
| <b>Substance Prohibitive (Date)</b>                                                        | 10/15/2014                 |
| <b>Ambient conditions</b>                                                                  |                            |
| installation altitude at height above sea level maximum                                    | 2 000 m                    |
| <b>ambient temperature</b>                                                                 |                            |
| • during operation                                                                         | -20 ... +60 °C             |
| • during storage                                                                           | -50 ... +80 °C             |
| • during transport                                                                         | -50 ... +80 °C             |
| relative humidity during operation                                                         | 10 ... 95 %                |
| <b>Main circuit</b>                                                                        |                            |
| <b>number of poles for main current circuit</b>                                            | 3                          |
| <b>adjustable current response value current of the current-dependent overload release</b> | 12 ... 17 A                |
| <b>operating voltage</b>                                                                   |                            |
| • rated value                                                                              | 20 ... 690 V               |
| • at AC-3 rated value maximum                                                              | 690 V                      |
| • at AC-3e rated value maximum                                                             | 690 V                      |
| <b>operating frequency rated value</b>                                                     | 50 ... 60 Hz               |
| <b>operational current rated value</b>                                                     | 17 A                       |
| <b>operational current</b>                                                                 |                            |
| • at AC-3 at 400 V rated value                                                             | 17 A                       |

|                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>● at AC-3e at 400 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                   | 17 A                                                                                   |
| <b>operating power</b>                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                        |
| <ul style="list-style-type: none"> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>● at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 4 kW<br>7.5 kW<br>7.5 kW<br>15 kW<br><br>4 kW<br>7.5 kW<br>7.5 kW<br>15 kW             |
| <b>operating frequency</b>                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                        |
| <ul style="list-style-type: none"> <li>● at AC-3 maximum</li> <li>● at AC-3e maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                     | 15 1/h<br>15 1/h                                                                       |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                        |
| <b>number of NC contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                 | 0                                                                                      |
| <b>number of NO contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                 | 0                                                                                      |
| <b>Protective and monitoring functions</b>                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                        |
| <b>product function</b>                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                        |
| <ul style="list-style-type: none"> <li>● ground fault detection</li> <li>● phase failure detection</li> </ul>                                                                                                                                                                                                                                                                                                                       | No<br>Yes                                                                              |
| <b>trip class</b>                                                                                                                                                                                                                                                                                                                                                                                                                   | CLASS 10                                                                               |
| <b>design of the overload release</b>                                                                                                                                                                                                                                                                                                                                                                                               | thermal                                                                                |
| <b>breaking capacity maximum short-circuit current (I<sub>cu</sub>)</b>                                                                                                                                                                                                                                                                                                                                                             |                                                                                        |
| <ul style="list-style-type: none"> <li>● at AC at 240 V rated value</li> <li>● at AC at 400 V rated value</li> <li>● at AC at 500 V rated value</li> <li>● at AC at 690 V rated value</li> </ul>                                                                                                                                                                                                                                    | 100 kA<br>65 kA<br>12 kA<br>5 kA                                                       |
| <b>breaking capacity operating short-circuit current (I<sub>cs</sub>) at AC</b>                                                                                                                                                                                                                                                                                                                                                     |                                                                                        |
| <ul style="list-style-type: none"> <li>● at 240 V rated value</li> <li>● at 400 V rated value</li> <li>● at 500 V rated value</li> <li>● at 690 V rated value</li> </ul>                                                                                                                                                                                                                                                            | 100 kA<br>30 kA<br>6 kA<br>3 kA                                                        |
| response value current of instantaneous short-circuit trip unit                                                                                                                                                                                                                                                                                                                                                                     | 410 A                                                                                  |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                        |
| <b>full-load current (FLA) for 3-phase AC motor</b>                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                        |
| <ul style="list-style-type: none"> <li>● at 480 V rated value</li> <li>● at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                            | 17 A<br>17 A                                                                           |
| <b>yielded mechanical performance [hp]</b>                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                        |
| <ul style="list-style-type: none"> <li>● for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>● for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>               | 1.5 hp<br>3 hp<br><br>5 hp<br>7.5 hp<br>15 hp<br>15 hp                                 |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                        |
| <b>product function short circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                    | Yes                                                                                    |
| <b>design of the short-circuit trip</b>                                                                                                                                                                                                                                                                                                                                                                                             | magnetic                                                                               |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                        |
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                            | any                                                                                    |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                                                                                             | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                       | 140 mm                                                                                 |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                        | 55 mm                                                                                  |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                        | 149 mm                                                                                 |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| <b>required spacing</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                  |
| <ul style="list-style-type: none"> <li>● for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— at the side 10 mm</li> </ul> </li> <li>● for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— at the side 10 mm</li> </ul> </li> <li>● for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— at the side 10 mm</li> </ul> </li> <li>● for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— at the side 10 mm</li> </ul> </li> <li>● for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— backwards 0 mm</li> <li>— at the side 10 mm</li> <li>— forwards 0 mm</li> </ul> </li> <li>● for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— backwards 0 mm</li> <li>— at the side 10 mm</li> <li>— forwards 0 mm</li> </ul> </li> </ul> |                                                  |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                  |
| <b>type of electrical connection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                  |
| <ul style="list-style-type: none"> <li>● for main current circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | screw-type terminals                             |
| <b>arrangement of electrical connectors for main current circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Top and bottom                                   |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                  |
| <ul style="list-style-type: none"> <li>● for main contacts <ul style="list-style-type: none"> <li>— solid or stranded 2x (1 ... 25 mm<sup>2</sup>), 1x (1 ... 35 mm<sup>2</sup>)</li> <li>— finely stranded with core end processing 2x (1 ... 16 mm<sup>2</sup>), 1x (1 ... 25 mm<sup>2</sup>)</li> </ul> </li> <li>● at AWG cables for main contacts 2x (18 ... 3), 1x (18 ... 2)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                  |
| <b>tightening torque</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                  |
| <ul style="list-style-type: none"> <li>● for main contacts with screw-type terminals</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 3 ... 4.5 N·m                                    |
| <b>design of screwdriver shaft</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Diameter 5 to 6 mm                               |
| <b>size of the screwdriver tip</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Pozidriv size 2                                  |
| <b>design of the thread of the connection screw</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                  |
| <ul style="list-style-type: none"> <li>● for main contacts</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | M6                                               |
| <b>Safety related data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                  |
| <b>B10 value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                  |
| <ul style="list-style-type: none"> <li>● with high demand rate according to SN 31920</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 5 000                                            |
| <b>proportion of dangerous failures</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                  |
| <ul style="list-style-type: none"> <li>● with low demand rate according to SN 31920</li> <li>● with high demand rate according to SN 31920</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 50 %<br>50 %                                     |
| <b>failure rate [FIT]</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                  |
| <ul style="list-style-type: none"> <li>● with low demand rate according to SN 31920</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 50 FIT                                           |
| T1 value for proof test interval or service life according to IEC 61508                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 10 y                                             |
| <b>protection class IP on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | finger-safe, for vertical contact from the front |
| display version for switching status                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Handle                                           |
| <b>Certificates/ approvals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                  |

## General Product Approval



[Confirmation](#)



[KC](#)



## Declaration of Conformity



EG-Konf.



## Test Certificates

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

## Marine / Shipping



ABS



BUREAU  
VERITAS

## Marine / Shipping



DNV



LRS



PRS



RINA



RMRS

## other

[Confirmation](#)

## other

## Railway



VDE

[Vibration and Shock](#)

[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2431-4TA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2431-4TA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2431-4TA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2431-4TA10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2431-4TA10&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2431-4TA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2431-4TA10&objecttype=14&gridview=view1>

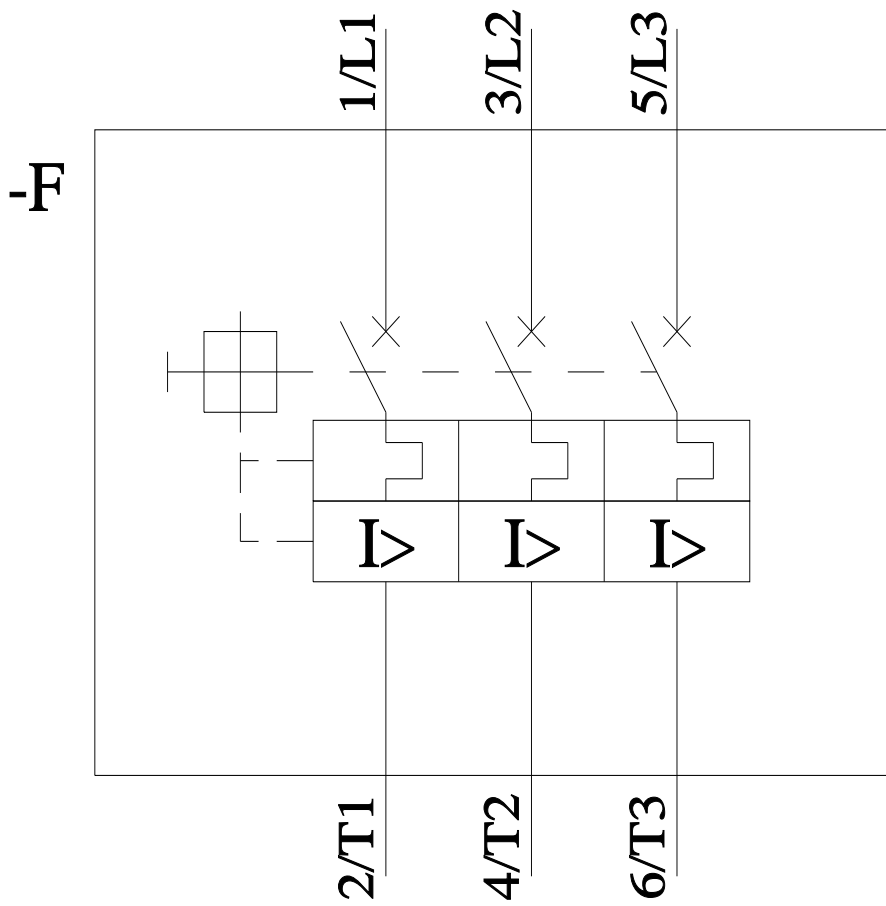

last modified:

6/25/2022 