


# 2.5V CMOS Low Jitter XO

**FK**



3.2 x 2.5mm Ceramic SMD

### Product Features

- 1 to 156.25 MHz Frequency Range
- <1 ps RMS jitter
- 2.5V CMOS compatible logic levels
- Designed for standard reflow and washing techniques
- Low power standby mode
- Pb-free and RoHS/Green compliant

### Product Description



The FK Series 2.5V crystal clock oscillator achieves superb stability and low power consumption over a broad range of operating conditions and frequencies. The low jitter output clock signal, generated internally with a non-PLL oscillator design, is compatible with LVCMOS logic levels. The device, available on tape and reel, is contained in a 3.2 x 2.5mm surface-mount ceramic package.

### Applications


Ideal for compact, high-density applications requiring low power or tight stability, including:

- Network adapter cards
- Portable Multimedia Devices
- Hard Disk Drives
- GPS/Navigation
- Bluetooth
- 802.11a/b/g WiFi

### Package:

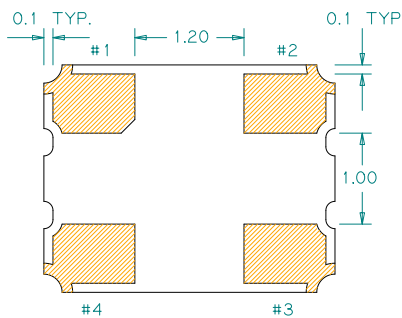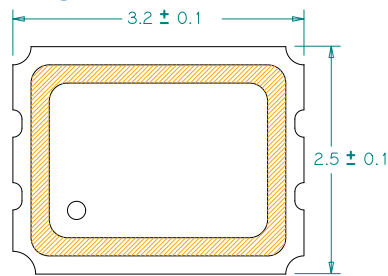

### Recommended Land Pattern:




### Pin Functions:

Pin	Function
1	OE
2	Ground
3	Clock Output
4	V <sub>DD</sub>

### Part Ordering Information:

**FK XXX YYYY**



Following the above format, SaRonix-eCera part numbers will be assigned upon confirmation of exact customer requirements.

### Electrical Performance

Parameter	Min.	Typ.	Max.	Units	Notes
Output Frequency	1		156.25	MHz	As specified
Supply Voltage	2.25	2.5	2.75	V	
Supply Current, Output Enabled			10	mA	1 to 50 MHz
			18		50 to 156.25 MHz
Supply Current, Standby Mode			10	μA	Output Hi-Z
Frequency Stability			±20 to ±50	ppm	See Note 1 below
Operating Temperature Range	-20		+70	°C	Commercial (standard)
	-40		+85		Industrial (standard)
Output Logic 0, V <sub>OL</sub>			10% V <sub>DD</sub>	V	
Output Logic 1, V <sub>OH</sub>	90% V <sub>DD</sub>			V	
Output Load			15	pF	
Duty Cycle	45		55	%	Measured 50% V <sub>DD</sub>
Rise and Fall Time			5	ns	Measured 10/90% of waveform
Jitter, Phase	1 to 156.25 MHz		1	ps RMS (1-σ)	12kHz to 20 MHz frequency band
Jitter, Accumulated	up to 75 MHz		5	ps RMS (1-σ)	20.000 adjacent periods
	75 to 156.25 MHz		3		
Jitter, Total	up to 75 MHz		50	ps pk-pk	100.000 random periods
	75 to 156.25 MHz		30		

#### Notes:

- Stability includes all combinations of operating temperature, load changes, rated input (supply) voltage changes, initial calibration tolerance (25°C), aging (1 year at 25°C average effective ambient temperature), shock and vibration.
- For specifications other than those listed, please contact sales.

### Output Enable / Disable Function

Parameter	Min.	Typ.	Max.	Units	Notes
Input Voltage (pin 1), Output Enable	0.7 V <sub>DD</sub>			V	or open
Input Voltage (pin 1), Output Disable (low power standby)			0.3 V <sub>DD</sub>	V	Output is Hi-Z
Internal pullup resistance	50			kΩ	
Output Disable Delay			100	ns	
Output Enable Delay			10	ms	

### Absolute Maximum Ratings

Parameter	Min.	Typ.	Max.	Units	Notes
Storage Temperature	-55		+125	°C	

For the latest product information visit: <http://www.pericom.com/products/timing/oscillators/FK2.5/>

For test circuit go to: [http://www.pericom.com/pdf/sre/tc\\_hcm052.pdf](http://www.pericom.com/pdf/sre/tc_hcm052.pdf)

For soldering reflow profile and reliability test ratings go to: <http://www.pericom.com/pdf/sre/reflow.pdf>

For tape and reel information go to: [http://www.pericom.com/pdf/sre/tr\\_3225\\_xo.pdf](http://www.pericom.com/pdf/sre/tr_3225_xo.pdf)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Diodes Incorporated:

[FK2400013](#) [FK0500003](#) [FK1200016](#) [FK1200017](#) [FK1630009](#) [FK1630011](#) [FK1840006](#) [FK2450030](#) [FK2500040](#)  
[FK2500043](#) [FK2500084](#) [FK2600029](#) [FK2700036](#) [FK2860003E](#) [FK2990001](#) [FK4000061](#) [FK5000022](#) [FK5000023](#)  
[FK5000024](#) [FK5000025](#) [FK5000027](#) [FK5120002](#) [FK5400007](#) [FK5660001](#) [FKA000015](#) [FKA000016](#) [FKC500023](#)  
[FK2500095](#) [FK2500100](#) [FK3300012](#) [FK6660006](#) [FKA000006A](#) [FKC500006](#) [FKC500008](#) [FKC500009A](#) [FK4800016](#)  
[FK5000039](#) [FK5000045](#) [FKA000007](#) [FKC500008A](#) [FKC500012](#) [FKC500010](#) [FKC500031](#) [FKA000019](#)  
[FKC500015Z](#) [FKC500030](#) [FK2660002](#) [FK2700005](#) [FK3330012](#) [FK4000038](#) [FK4000041](#) [FK4000042](#) [FK4910004](#)  
[FK5000004](#) [FK5000044](#) [FK6600009](#) [FK6600013](#) [FKA000004](#) [FK1220018](#) [FK2400043](#) [FK2400045](#) [FK2500027](#)  
[FK2500054W](#) [FK2500060W](#) [FK0730002](#) [FK1220015](#) [FK1600011](#) [FK1840007J](#) [FK2400015](#) [FK2450013Q](#)  
[FK2500032](#) [FK2500054](#) [FK2500101](#) [FK2500112](#) [FK2700024](#) [FK3200003](#) [FK5000016](#) [FK5000038](#) [FK5000050](#)  
[FK7500011](#) [FKA000009](#) [FKF620004](#) [FK0200003M](#) [FK1120004](#) [FK1920012](#) [FK2400033Z](#) [FK2500020](#) [FK2500049](#)  
[FK2500051](#) [FK2600008](#) [FK2600042](#) [FK3000006](#) [FK3330027M](#) [FK1120006](#) [FK1600014](#) [FK2000001](#) [FK2400020](#)  
[FK2400036](#) [FK2400038](#) [FK2500050](#)