



BAV19W THRU BAV21W


Reverse Voltage 120-250 Volts Forward Current - 0.2Ampere

FAST SWITCHING DIODES

Features


- ◆ Fast switching speed
- ◆ Surface mount package ideally suited
- ◆ for automatic insertion
- ◆ For general purpose switching applications High
- ◆ conductance

SOD-123

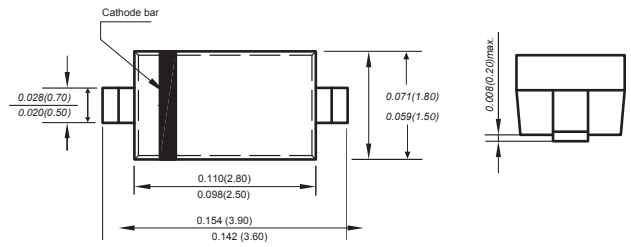

Mechanical Data

Case: JEDEC SOD-123 molded plastic body
 Terminals: Plated leads solderable per MIL-STD-750, Method 2026
 Polarity: Polarity symbols marked on case
 Weight : 0.00056 ounce, 0.016 grams
 Marking:BAV19W:A8, BAV20W:T2, BAV21W:T3

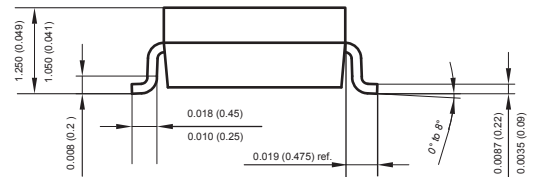

Dimensions in inches and (millimeters)

Absolute Maximum Ratings at 25 °C

PARAMETER	SYMBOLS	BAV19W	BAV20W	BAV21W	UNITS
Peak repetitive peak reverse voltage	V_{RRM}				
Working peak reverse voltage	V_{RWM}	120	200	250	V
DC Blocking voltage	V_R				
RMS Reverse voltage	$V_{R(RMS)}$	71	106	141	V
Forward continuous current	I_{FM}		250		mA
Average rectified output current	I_o		200		mA
Peak forward surge current @=1s	I_{FSM}		1		A
@=1ms			3		
@=1us			9		
Repetitive peak forward current	I_{FRM}		625		mA
Power dissipation	P_d		500		mW
Thermal resistance junction to ambient	$R_{\theta JA}$		500		K/W
Storage temperature	T_{STG}		-55 to +150		°C
Non-Repetitive peak reverse voltage	V_{RM}	120	200	250	V

Characteristics at Ta= 25 °C

PARAMETER	SYMBOLS	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_{F1}			1.0	V	$I_F=0.1A$
	V_{F2}			1.25	V	$I_F=0.2A$
Reverse current	I_R			0.1	uA	$V_R=120V$
				0.1	uA	$V_R=200V$
				0.1	uA	$V_R=250V$
Capacitance between terminals	C_T			5	pF	$V_R=4V, f=1.0MHz$
Reverse recovery time	t_{rr}			50	ns	$I_F=I_R=10mA$ $I_{rr}=0.1I_R, R_L=100 \Omega$



BAV19W THRU BAV21W

Reverse Voltage 120-250 Volts Forward Current - 0.2Ampere

Typical Characteristics

Fig.1 Power Derating Curve

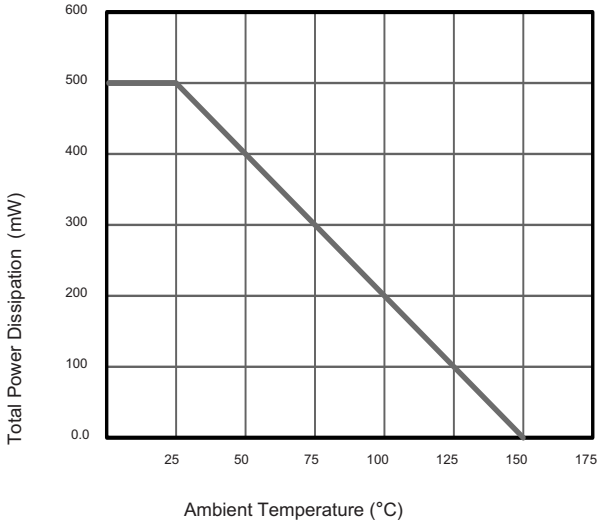


Fig.2 Typical Reverse Characteristics

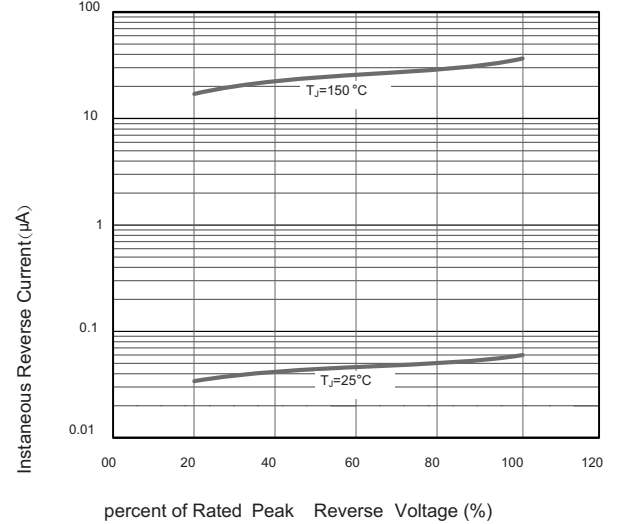


Fig.3 Typical Instantaneous Forward Characteristics


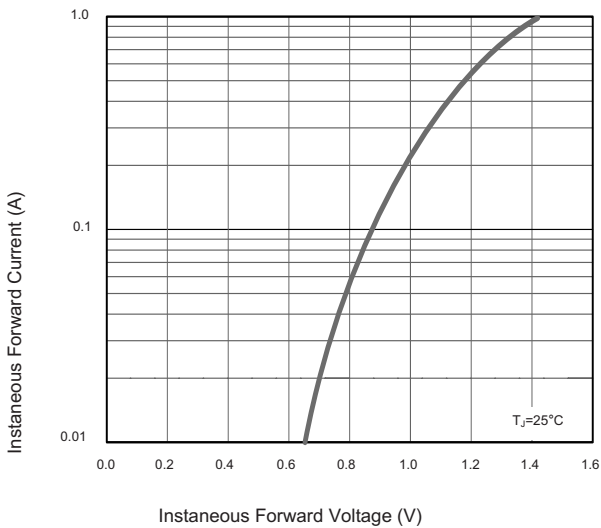


Fig.4 Typical Junction Capacitance




The curve above is for reference only.

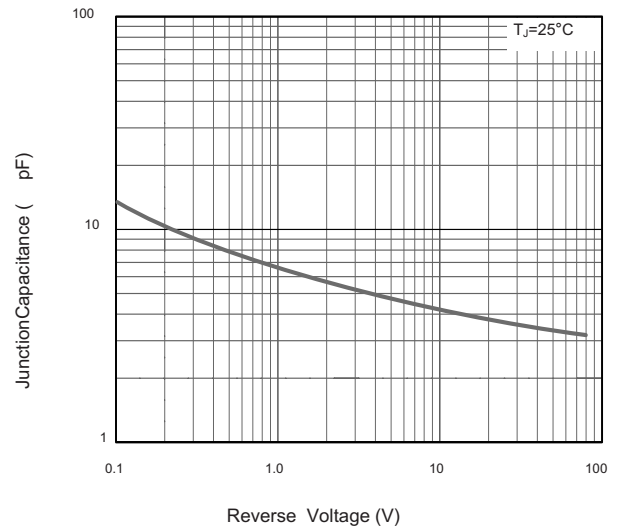

BAV19W THRU BAV21W

Reverse Voltage 120-250 Volts Forward Current - 0.2Ampere

Packing information

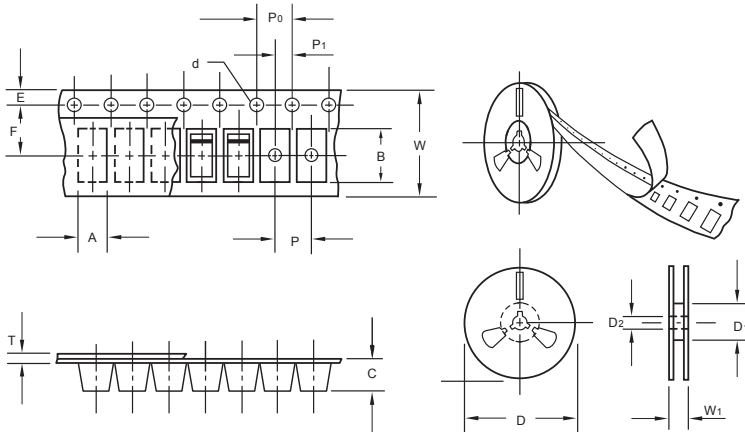

unit:mm


Item	Symbol	Tolerance	SOD-123
Carrier width	A	0.1	2.1
Carrier length	B	0.1	4.0
Carrier depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D ₁	min	50.0
Feed hole diameter	D ₂	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P ₀	0.1	4.00
Embossment center	P ₁	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W ₁	1.0	10.5

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-123	7"	3,000	4.0	45,000	210*208*203	178	430*430*235	180,000	9.0

Suggested Pad Layout

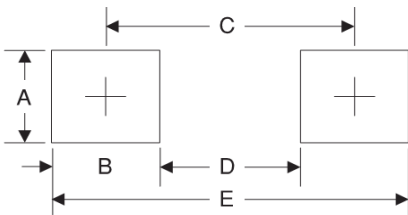

Symbol	Unit (mm)	Unit (inch)
A	1.2	0.047
B	1.2	0.047
C	3.2	0.126
D	2.0	0.079
E	4.4	0.173