
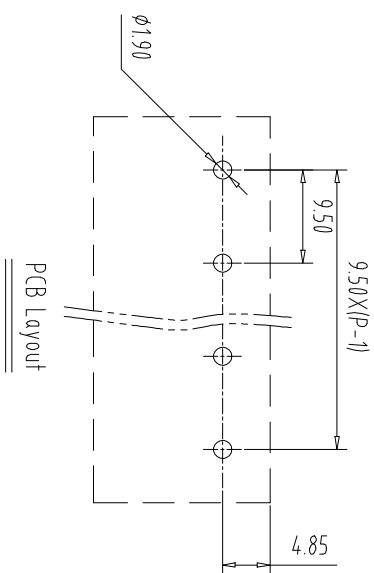
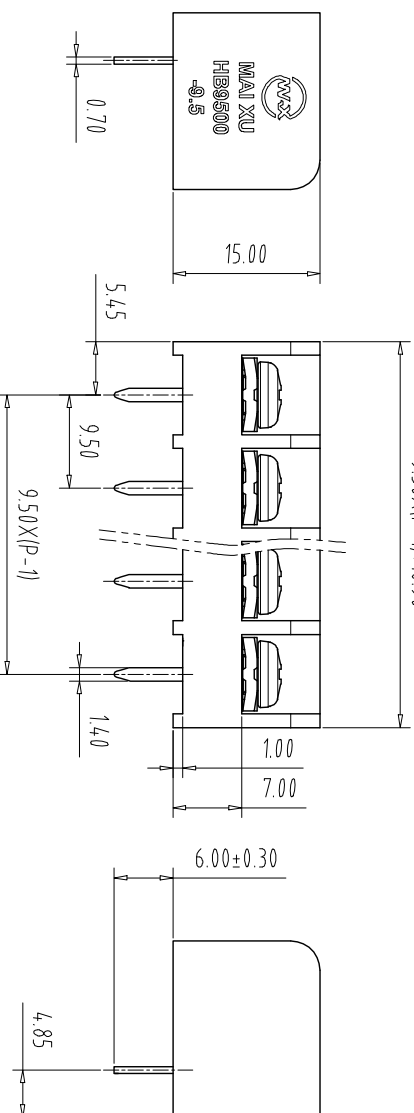


注：本板为禁止传输、复制、编辑文档，以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

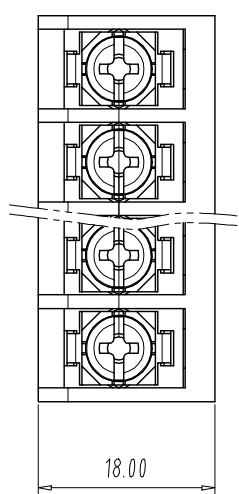

NOTES1:  
UL Standard

1	Use group	B	C	D
	Rated Current	20A	20A	10A
	Rated Voltage	300V	300V	300V

- 2 Torque value: M4, 10.53Lb.in
- 3 Wire range: 22~10AWG

IEC Standard

1	Pollution Degree	3	2	2
	Overvoltage Category	III	II	II
	Rate Impulse Voltage(KV)	/	/	/
	Rate Voltage(V)	/	400V	/
	Rate Current(A)	/	17.5A	/

- 2 Torque value: M4, 1.2Nm
- 3 wire range: 0.5-4.0mm<sup>2</sup>


NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Copper alloy(Sn Plated)
- 3.Screw: Steel(M4, Ni Plated)

NOTES3:

- 1.Pitch: 9.50mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

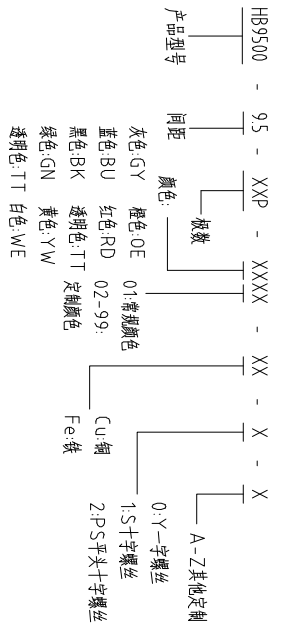

Pitch	Range	In	Nominal Dimension	Range		
mm	Over	In mm	Over	Over	Over	Over
	6	10	30	60	100	150
	TO	TO	TO	TO	TO	TO
	6	10	24	30	60	100
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
						±1.00
						±1.30
						±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
		22.09.14	SCALE	1:1	1/1
APP	DATE		NAME	A4	
			HB9500-95-XXP		
			DWGNO.		

MAI XU 慈溪市迈旭电子有限公司