

## Three-terminal positive voltage regulator

### FEATURES:

※ Maximum output current

**IOM: 0.1A**


※ Output voltage

**VO: 5V**


※ Continuous total dissipation

**PD: 0.25W**

### TYPICAL APPLICATION:

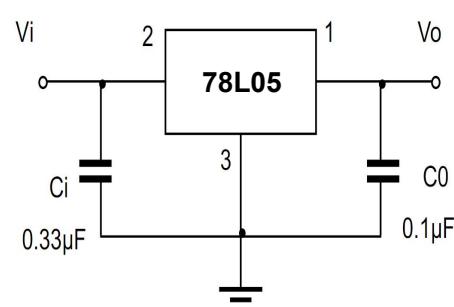

SOT-23



1.OUT  
2.IN  
3.GND

**MARKING: L05**

Solid dot = Green molding compound device,  
if none, the normal device.

### Absolute Maximum ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	Vi	30	V
Thermal Resistance From Junction to air	RθJA	160	°C/W
Operating Junction Temperature Range	TOPR	-40~+125	°C
Storage Temperature Range	TSTG	-65~+150	°C


### Electrical Characteristics At Specified Virtual Junction Temperature (Vi=10V, Io=40mA, Ci=0.33μF, Co=0.1μF. Unless Otherwise Specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output voltage	VO	25 °C	4%	4.8	5	V
			3%	4.85	5	V
			2%	4.9	5	V
Output voltage	VO	7V≤Vi≤20V, Io=1mA-40mA	-25~+125	4.8	5	V
		7V≤Vi≤20V, Io=1mA-70mA	-25~+125	4.75	5	V
Load Regulation	ΔVO	Io=1mA-100mA, Vi=10V	25 °C		15	mV
		Io=1mA-40mA, Vi=10V	25 °C		5	mV
Line Regulation	ΔVO	7V≤Vi≤20V, Io=40mA	25 °C		32	mV
		8V≤Vi≤20V, Io=40mA	25 °C		26	mV
Quiescent Current	Iq		25 °C		3.8	mA
Quiescent Current Change	ΔIq	8V≤Vi≤20V, Io=40mA	-25~+125			1.5 mA
	ΔIq	1mA≤Io≤40mA	-25~+125			0.1 mA
Output Noise Voltage	VN	10Hz≤f≤100KHz	25 °C		42	μV/Vo
Ripple Rejection	Rr	8V≤Vi≤20V, f=120Hz, Io=40mA	-25~+125	41	49	dB
Dropout Voltage	Vd	Io=40mA	25 °C		1.7	V

Note :

Bypass Capacitors are Recommended For Optimum Stability and Transient Response  
and Should be located as Close as Possible to the Regulators

## SOT-23 PACKAGE OUTLINE DIMENSIONS

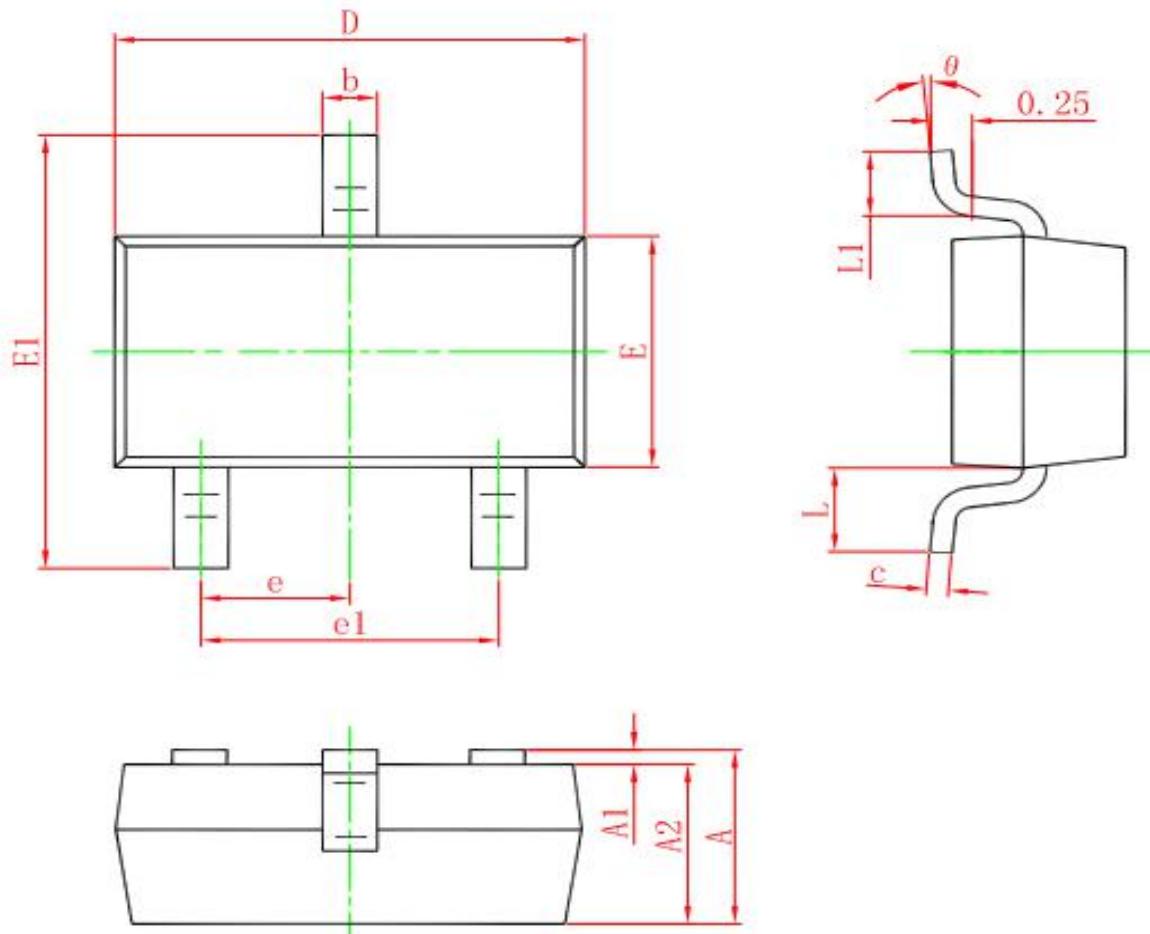

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°