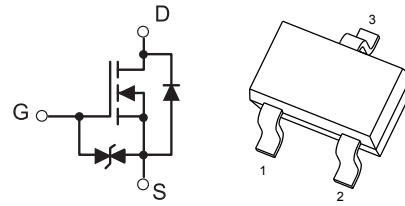


**Features**

- High density cell design for low $R_{DS(on)}$.
- Voltage controlled small signal switch.
- Rugged and reliable.
- High saturation current capability.

SOT-323

1. Gate
2. Source
3. Drain

Mechanical Data

- Case:Molded Plastic,SOT-323 .
- Epoxy:UL 94V-0 rate flame retardant
- Marking: **72K** .
- Mounting Position : Any.

Maximum Ratings

Rating at 25°C ambient temperature unless otherwise specified.

Characteristic	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	60	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current (Continuous)	I_D	340	mA
Pulsed Drain Current(note1)	I_{DM}	800	mA
Total power Dissipation	P_D	200	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	625	°C/W
Operating Temperature Range,	T_j	150	°C
Storage Temperature Range	T_{STG}	-55 — +150	°C

Electrical Characteristics

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
Drain-source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	60			V
GateThreshold Voltage (note 2)	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 1mA$	1	1.3	2.5	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 48V, V_{GS} = 0V$			1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 10	μA
Drain-Source On-Resistance (note 2)	$R_{DS(on)}$	$V_{GS} = 4.5V, I_D = 200mA$		1.1	3	Ω
		$V_{GS} = 10V, I_D = 500mA$		0.9	2.5	Ω
DYNAMIC PARAMETERS (note 3)						
Input Capacitance	C_{iss}	$V_{DS} = 10V, V_{GS} = 0V, f = 1MHz$			40	pF
Output Capacitance	C_{oss}				30	pF
Reverse Transfer Capacitance	C_{rss}				10	pF





SWITCHING PARAMETERS(note 3)

Turn-on Delay Time	$t_{d(on)}$	$V_{GS}=10V, V_{DD}=50V, R_G=50\Omega$		10	ns
Turn-off Delay Time	$t_{d(off)}$	$R_{GS}=50\Omega, R_L=250\Omega$		15	ns
Reverse Recovery Time	t_{rr}	$V_{GS}=0V, I_S=300mA, V_R=25V,$ $dI_S/dt=-100A/\mu s$	30		ns
Recovered Charge	Q_r	$V_{GS}=0V, I_S=300mA, V_R=25V$ $dI_S/dt=-100A/\mu s$	30		nC
GATE-SOURCE ZENER DIODE					
Gate-Source Breakdown Voltage	BV_{GSO}	$I_{GS}=\pm 1mA$ (Open Drain)	± 21.5	± 30	V
DRAIN-SOURCE DIODE					
Diode Forward Voltage(note 2)	V_{SD}	$I_S=300mA, V_{GS} = 0V$		1.5	V
Continuous Diode Forward Current	I_S			0.2	A
Pulsed Diode Forward Current(note1)	I_{SM}			0.53	A

Notes :





1. Repetitive rating: Pulse width limited by junction temperature.
2. Pulse Test : Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. Guaranteed by design, not subject to production testing.

Electrical Characteristics $T_a = 25^\circ C$ unless otherwise specified

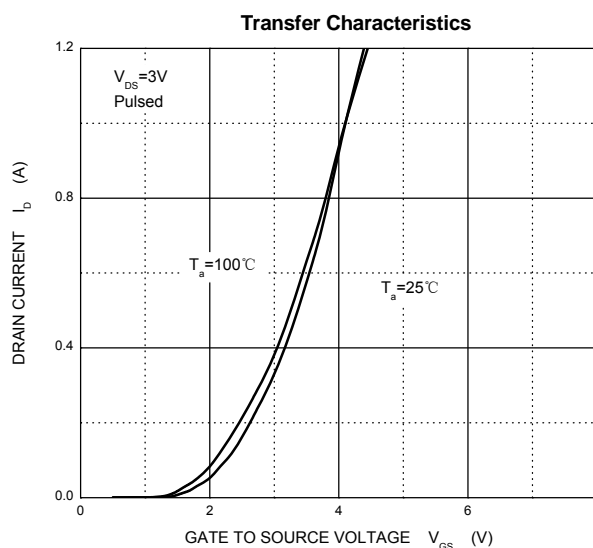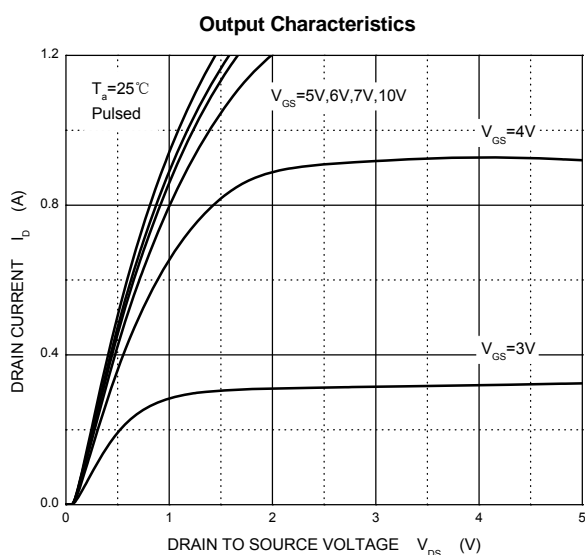






Electrical Characteristics $T_a = 25^\circ\text{C}$ unless otherwise specified

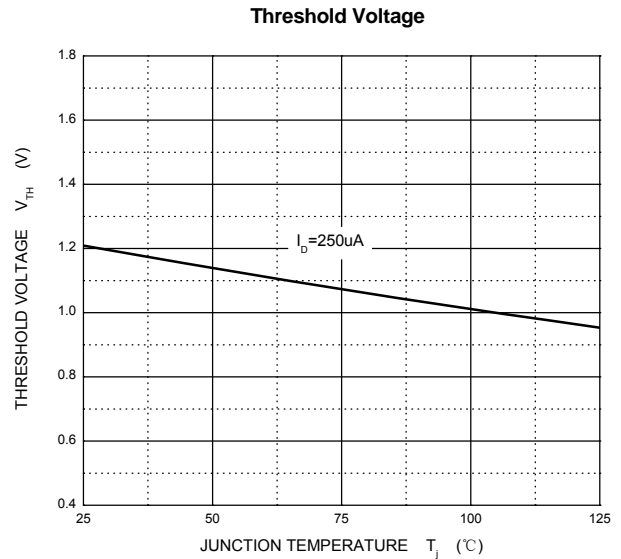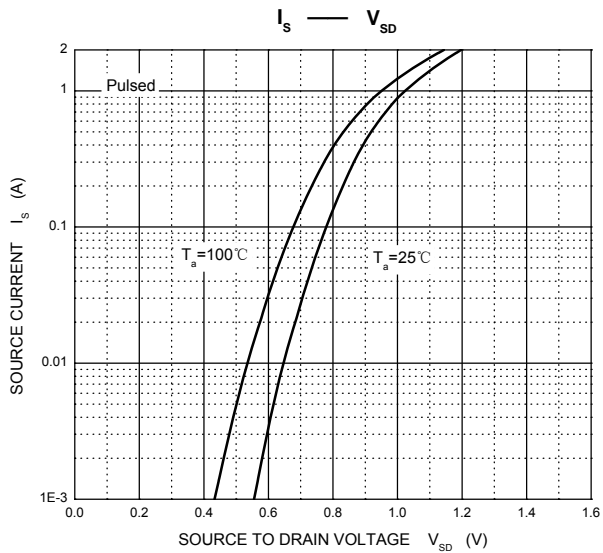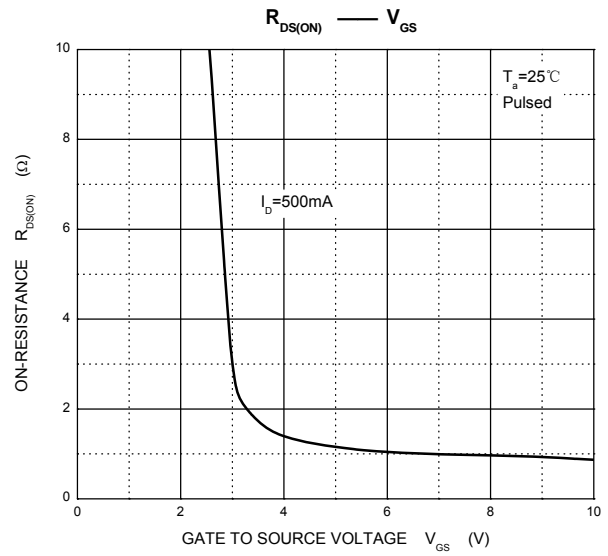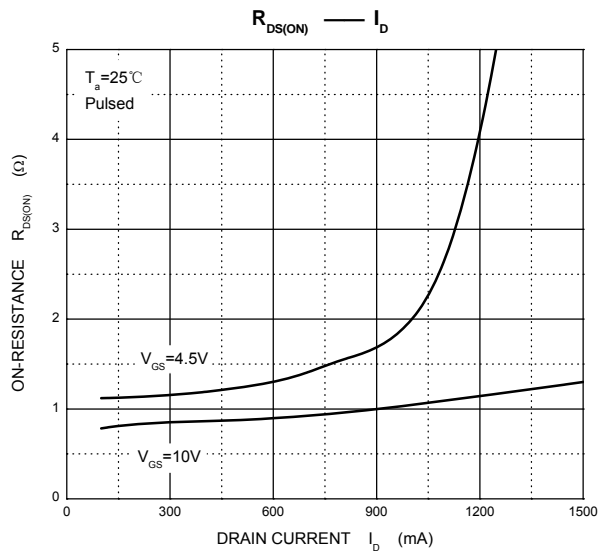



SOT-323 Package Outline Dimensions

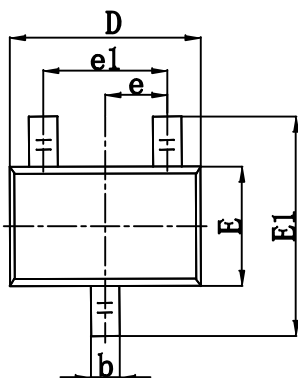

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.