

FDC697P

P-Channel 1.8V PowerTrench® MOSFET

General Description



This P-Channel 1.8V specified MOSFET uses Fairchild's advanced low voltage Power Trench process. It has been optimized for battery power management applications.

Applications

- Battery management
- Load Switch
- Battery protection

Features

- -8 A, -20 V $R_{DS(ON)} = 20\text{ m}\Omega @ V_{GS} = -4.5\text{ V}$
 $R_{DS(ON)} = 25\text{ m}\Omega @ V_{GS} = -2.5\text{ V}$
 $R_{DS(ON)} = 35\text{ m}\Omega @ V_{GS} = -1.8\text{ V}$
- High performance trench technology for extremely low $R_{DS(ON)}$
- Fast switching speed
- FLMP SuperSOT-6 package: Enhanced thermal performance in industry-standard package size



Absolute Maximum Ratings T_A=25°C unless otherwise noted

| Symbol | Parameter | Ratings | Units |
|-----------------------------------|--|-------------|-------|
| V _{DSS} | Drain-Source Voltage | -20 | V |
| V _{GSS} | Gate-Source Voltage | ±8 | V |
| I _D | Drain Current – Continuous (Note 1a) – Pulsed | -8 | A |
| | | -40 | |
| P _D | Power Dissipation (Note 1a) (Note 1b) | 2 | W |
| | | 1.5 | |
| T _J , T _{STG} | Operating and Storage Junction Temperature Range | -55 to +150 | °C |

Thermal Characteristics

| | | | |
|------------------|--|-----|------|
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1a) (Note 1b) | 60 | °C/W |
| | | 111 | |
| R _{θJC} | Thermal Resistance, Junction-to-Case | 0.5 | |

Package Marking and Ordering Information

| Device Marking | Device | Reel Size | Tape width | Quantity |
|----------------|---------|-----------|------------|------------|
| .697 | FDC697P | 7" | 8mm | 3000 units |

Electrical Characteristics

$T_A = 25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|--------|-----------|-----------------|-----|-----|-----|-------|
|--------|-----------|-----------------|-----|-----|-----|-------|

Off Characteristics

| | | | | | | |
|--------------------------------------|---|--|-----|-------|-----------|----------------------|
| BV_{DSS} | Drain–Source Breakdown Voltage | $V_{GS} = 0\text{ V}, I_D = -250\ \mu\text{A}$ | -20 | | | V |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = -250\ \mu\text{A}$, Referenced to 25°C | | -12.2 | | mV/ $^\circ\text{C}$ |
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{DS} = -16\text{ V}, V_{GS} = 0\text{ V}$ | | | -1 | μA |
| I_{GSS} | Gate–Body Leakage | $V_{GS} = \pm 8\text{ V}, V_{DS} = 0\text{ V}$ | | | ± 100 | nA |

On Characteristics (Note 2)

| | | | | | | |
|--|--|---|------|----------------------|----------------------|----------------------|
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$ | -0.4 | -0.8 | -1.5 | V |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate Threshold Voltage Temperature Coefficient | $I_D = -250\ \mu\text{A}$, Referenced to 25°C | | 2.9 | | mV/ $^\circ\text{C}$ |
| $R_{DS(on)}$ | Static Drain–Source On–Resistance | $V_{GS} = -4.5\text{ V}, I_D = -8\text{ A}$ $V_{GS} = -2.5\text{ V}, I_D = -6.8\text{ A}$ $V_{GS} = -1.8\text{ V}, I_D = -5.8\text{ A}$ $V_{GS} = -4.5\text{ V}, I_D = -8\text{ A}, T_J = 125^\circ\text{C}$ | | 13 18 26 16 | 20 25 35 27 | m Ω |
| g_{FS} | Forward Transconductance | $V_{DS} = -5\text{ V}, I_D = -8\text{ A}$ | | 37 | | S |

Dynamic Characteristics

| | | | | | | |
|------------|------------------------------|--|--|------|--|----------|
| C_{iss} | Input Capacitance | $V_{DS} = -10\text{ V}, V_{GS} = 0\text{ V}$ | | 3524 | | pF |
| C_{oss} | Output Capacitance | $f = 1.0\text{ MHz}$ | | 544 | | pF |
| C_{riss} | Reverse Transfer Capacitance | | | 254 | | pF |
| R_G | Gate Resistance | $V_{GS} = 15\text{ mV}, f = 1.0\text{ MHz}$ | | 3.8 | | Ω |

Switching Characteristics (Note 2)

| | | | | | | |
|--------------|---------------------|---|--|-----|-----|----|
| $t_{d(on)}$ | Turn–On Delay Time | $V_{DD} = -10\text{ V}, I_D = -1\text{ A}$ | | 18 | 32 | ns |
| t_r | Turn–On Rise Time | $V_{GS} = -4.5\text{ V}, R_{GEN} = 6\ \Omega$ | | 6 | 12 | ns |
| $t_{d(off)}$ | Turn–Off Delay Time | | | 119 | 190 | ns |
| t_f | Turn–Off Fall Time | | | 43 | 69 | ns |
| Q_g | Total Gate Charge | $V_{DS} = -10\text{ V}, I_D = -8\text{ A}$ | | 39 | 55 | nC |
| Q_{gs} | Gate–Source Charge | $V_{GS} = -4.5\text{ V}$ | | 6 | 8.4 | nC |
| Q_{gd} | Gate–Drain Charge | | | 5.6 | 7.8 | nC |

Drain–Source Diode Characteristics and Maximum Ratings

| | | | | | | |
|----------|---|---|--|------|------|----|
| I_S | Maximum Continuous Drain–Source Diode Forward Current | | | | -1.6 | A |
| V_{SD} | Drain–Source Diode Forward Voltage | $V_{GS} = 0\text{ V}, I_S = -1.6\text{ A}$ (Note 2) | | -0.7 | -1.2 | V |
| t_{rr} | Reverse Recovery Time | $I_F = -8\text{ A}$ | | 27 | | ns |
| Q_{rr} | Reverse Recovery Charge | $d_{IF}/d_t = 100\text{ A}/\mu\text{s}$ | | 16 | | nC |

Notes: 1. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



a) $60^\circ\text{C}/\text{W}$ when mounted on a 1 in^2 pad of 2 oz copper




b) $111^\circ\text{C}/\text{W}$ when mounted on a minimum pad of 2 oz copper


Scale 1 : 1 on letter size paper

2. Pulse Test: Pulse Width < 300 μs , Duty Cycle < 2.0%




Dimensional Outline and Pad Layout

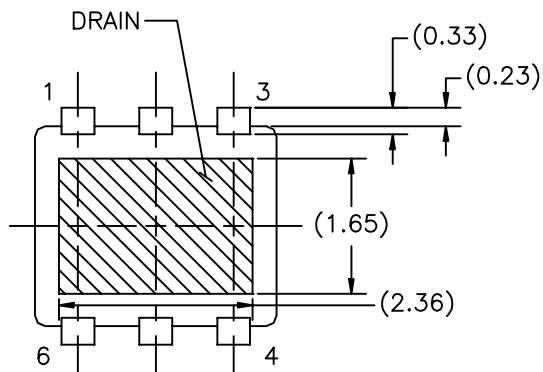

Bottom View

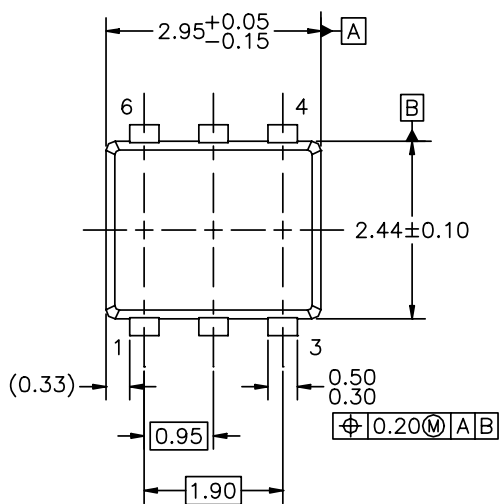

Top View

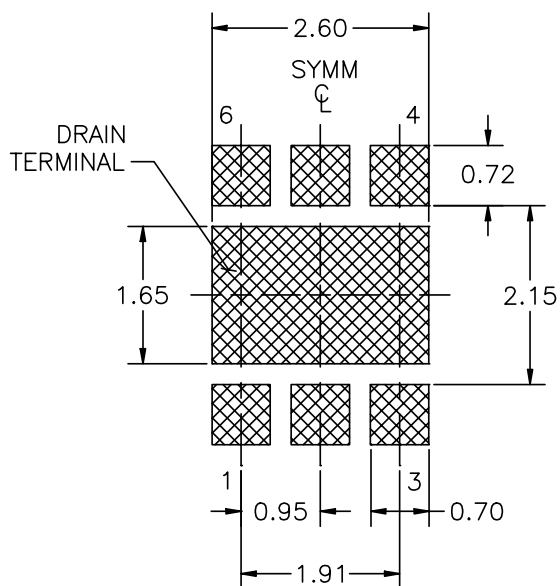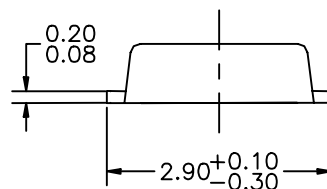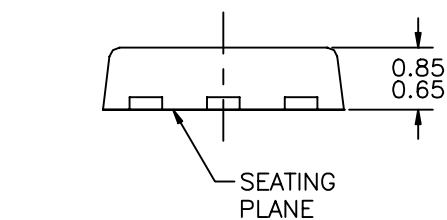

Recommended Landing Pattern

Typical Characteristics

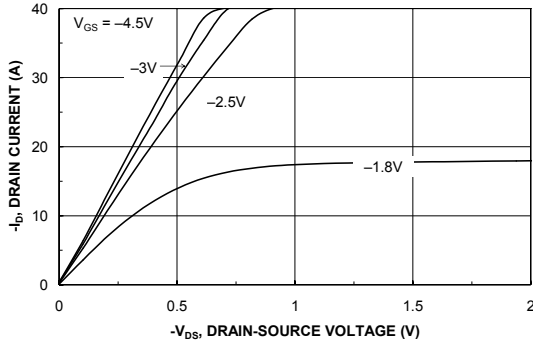


Figure 1. On-Region Characteristics.

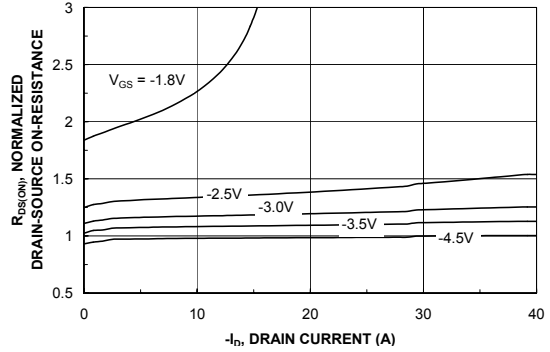


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

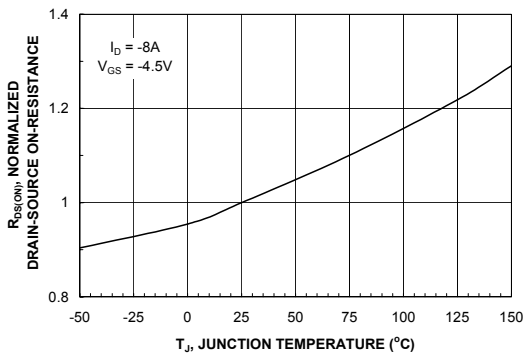


Figure 3. On-Resistance Variation with Temperature.

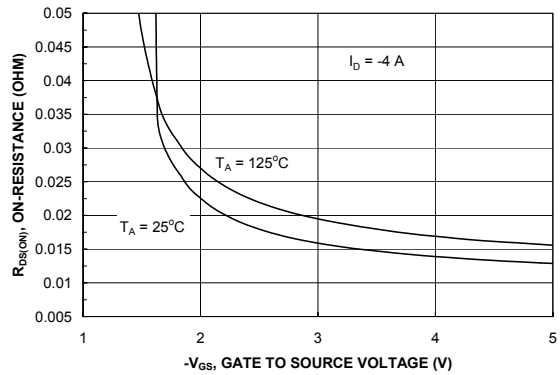


Figure 4. On-Resistance Variation with Gate-to-Source Voltage.

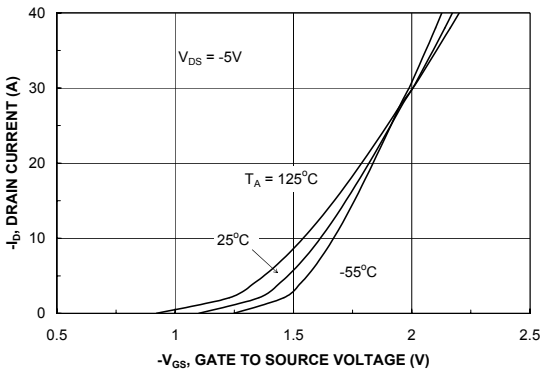


Figure 5. Transfer Characteristics.

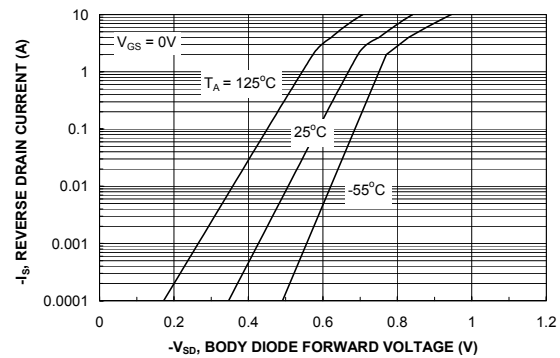


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

Typical Characteristics

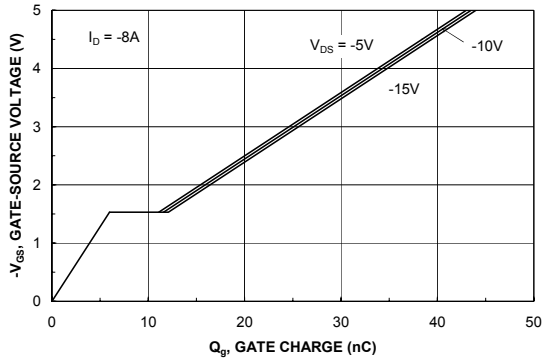


Figure 7. Gate Charge Characteristics.

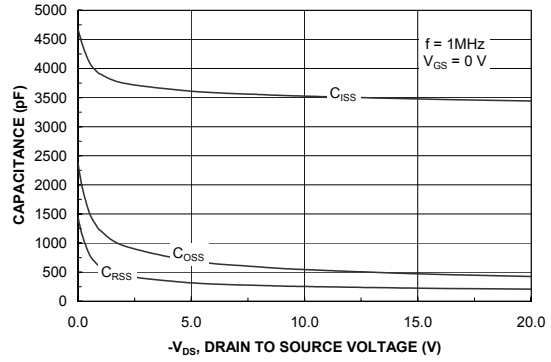


Figure 8. Capacitance Characteristics.

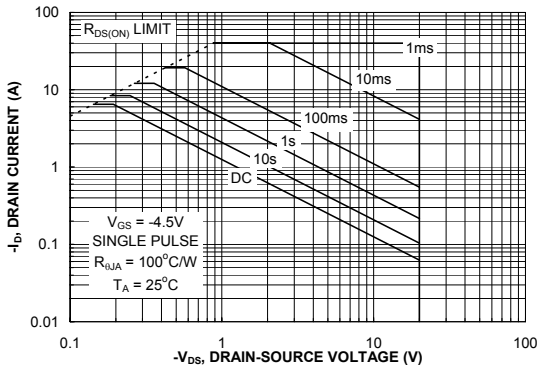


Figure 9. Maximum Safe Operating Area.

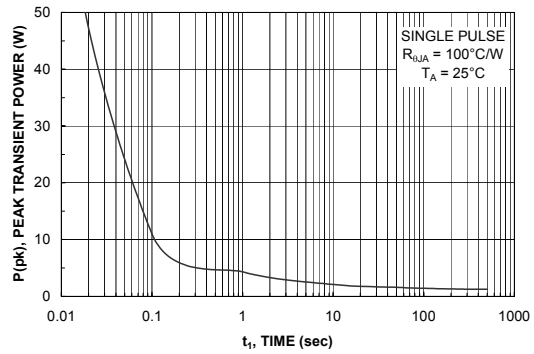


Figure 10. Single Pulse Maximum Power Dissipation.

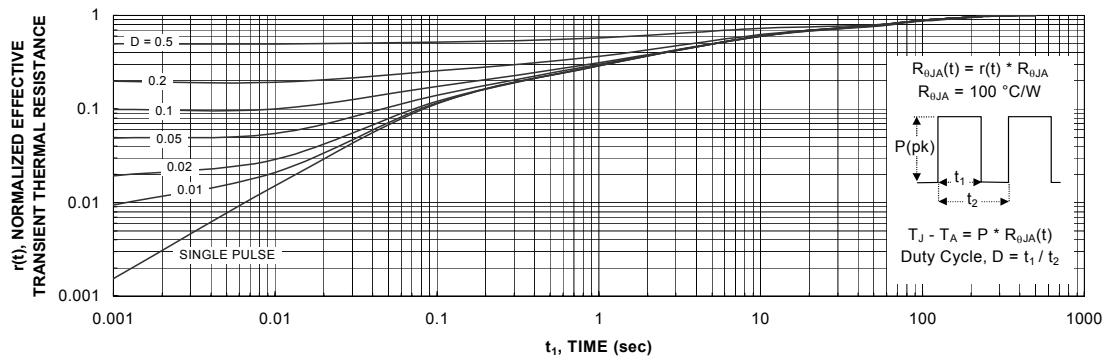


Figure 11. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1b.
Transient thermal response will change depending on the circuit board design.

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| | | | | |
|--------------------------------------|---------------------|---------------|---------------------|-----------------|
| ACEx™ | FACT Quiet Series™ | ISOPLANAR™ | POP™ | SuperFET™ |
| ActiveArray™ | FAST® | LittleFET™ | Power247™ | SuperSOT™-3 |
| Bottomless™ | FASTr™ | MICROCOUPLER™ | PowerTrench® | SuperSOT™-6 |
| CoolFET™ | FPST™ | MicroFET™ | QFET® | SuperSOT™-8 |
| CROSSVOLT™ | FRFET™ | MicroPak™ | QS™ | SyncFET™ |
| DOMET™ | GlobalOptoisolator™ | MICROWIRE™ | QT Optoelectronics™ | TinyLogic® |
| EcoSPARK™ | GTO™ | MSX™ | Quiet Series™ | TINYOPTO™ |
| E ² CMOS™ | HiSeC™ | MSXPro™ | RapidConfigure™ | TruTranslation™ |
| EnSigna™ | I ² C™ | OCX™ | RapidConnect™ | UHC™ |
| FACT™ | ImpliedDisconnect™ | OCXPro™ | SILENT SWITCHER® | UltraFET® |
| Across the board. Around the world.™ | OPTOLOGIC® | SMART START™ | STEALTH™ | VCX™ |
| The Power Franchise™ | OPTOPLANAR™ | SPM™ | | |
| Programmable Active Droop™ | PACMAN™ | | | |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|------------------------|---|
| Advance Information | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| Obsolete | Not In Production | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only. |

Home >> Find products >>

FDC697P

P-Channel 1.8V PowerTrench MOSFET Recommend FDC697P_F077

Contents

- [General description](#)
- [Features](#)
- [Applications](#)
- [Product status/pricing/packaging](#)
- [Order Samples](#)
- [Models](#)
- [Qualification Support](#)

General description

This P-Channel 1.8V specified MOSFET uses Fairchild's advanced low voltage Power Trench process. It has been optimized for battery power management applications.

[back to top](#)

Features

- -8 A, -20V $R_{DS(ON)} = 20 \text{ m}\Omega @ V_{GS} = -4.5 \text{ V}$
 $R_{DS(ON)} = 25 \text{ m}\Omega @ V_{GS} = -2.5 \text{ V}$
 $R_{DS(ON)} = 35 \text{ m}\Omega @ V_{GS} = -1.8 \text{ V}$
- High performance trench technology for extremely low $R_{DS(ON)}$
- Fast switching speed
- FLMP SuperSOT-6 package: Enhanced thermal performance in industry-standard package size

[back to top](#)

Applications

- Battery management
- Load Switch
- Battery protection

BUY

Datasheet

[Download this datasheet](#)



[e-mail this datasheet](#)



This page

[Print version](#)

This product

[Use in FETBench Analysis](#)



Related Links

[Request samples](#)

[How to order products](#)

[Product Change Notices \(PCNs\)](#)

[Support](#)

[Sales support](#)


[Quality and reliability](#)

[Design center](#)

[back to top](#)

Product status/pricing/packaging

BUY

| Product | Product status | Pb-free Status | Pricing* | Package type | Leads | Packing method | Package Marking Convention** |
|--------------|---------------------------------|--|----------|--------------|-------|----------------|--|
| FDC697P | Not recommended for new designs |  | \$0.62 | SSOT-6 FLMP | 6 | TAPE REEL | Line 1: &E&Y (Binary Calendar Year Coding) Line 2: .697 |
| FDC697P_F077 | Full Production |  Full Production | \$0.57 | SSOT-6 FLMP | 6 | TAPE REEL | Line 1: &E&Y (Binary Calendar Year Coding) Line 2: .697 |

* Fairchild 1,000 piece Budgetary Pricing

** A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a [Fairchild distributor](#) to obtain samples



Indicates product with Pb-free second-level interconnect. For more information [click here](#).

Package marking information for product FDC697P is available. [Click here for more information](#).

[back to top](#)

Models

| Package & leads | Condition | Temperature range | Software version | Revision date |
|-----------------|----------------------------|-------------------|------------------|---------------|
| PSPICE | | | | |
| SSOT-6 FLMP-6 | Electrical | 25°C to 125°C | Orcad 9.1 | Aug 14, 2003 |

[back to top](#)

Qualification Support

Click on a product for detailed qualification data

| Product |
|------------------------------|
| FDC697P |
| FDC697P_F077 |

[back to top](#)

© 2007 Fairchild Semiconductor

[Products](#) | [Design Center](#) | [Support](#) | [Company News](#) | [Investors](#) | [My Fairchild](#) | [Contact Us](#) | [Site Index](#) | [Privacy Policy](#) | [Site Terms & Conditions](#) | [Standard Terms & Conditions](#) <