



SOT-89 Plastic-Encapsulate Voltage Regulators


78L08

Three-terminal positive voltage regulator

Features:

Maximum Output current I_o : 0.1A
Output voltage V_o : 8V
Continuous total dissipation P_D : 0.5W ($T_a = 25^\circ\text{C}$)

SOT-89-3L

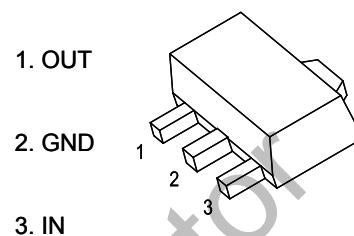

Marking: 78L08


Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

Electrical Characteristics at Specified Virtual Junction Temperature

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	V_o		25°C	7.7	8.0	V
		10.5V ≤ V_I ≤ 23V, I_o =1mA~40mA	0-125°C	7.6	8.0	8.4
		I_o =1mA~70mA		7.6	8.0	8.4
Load Regulation	ΔV_o	I_o =1mA~100mA	25°C		18	mV
		I_o =1mA~40mA	25°C		10	mV
Line regulation	ΔV_o	10.5V ≤ V_I ≤ 23V	25°C		42	mV
		11V ≤ V_I ≤ 23V	25°C		36	125
Quiescent Current	I_q		25°C		4	6 mA
Quiescent Current Change	ΔI_q	11V ≤ V_I ≤ 23V	0-125°C		1.5	mA
	ΔI_q	1mA ≤ I_o ≤ 40mA	0-125°C		0.1	mA
Output Noise Voltage	V_N	10Hz ≤ f ≤ 100KHz	25°C		54	µV
Ripple Rejection	RR	13V ≤ V_I ≤ 23V, f=120Hz	0-125°C	37	46	dB
Dropout Voltage	V_d		25°C		1.7	V







TYPICAL APPLICATION

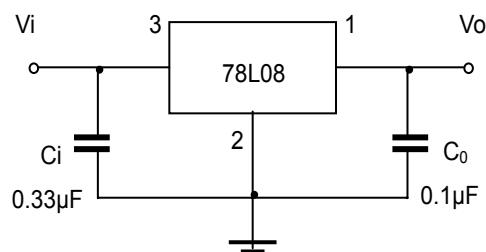

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics


RATING AND CHARACTERISTIC CURVES (78L08)

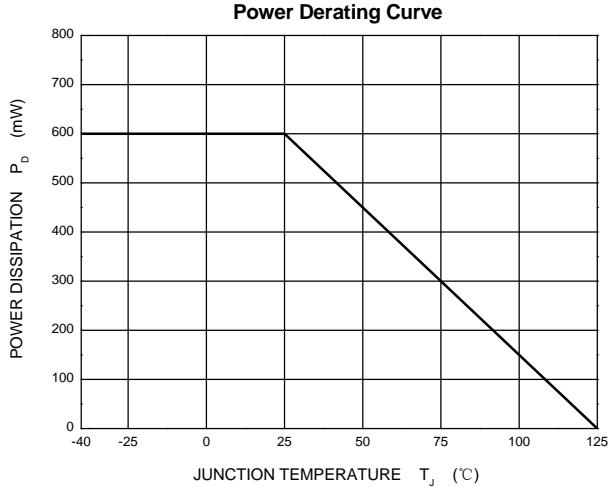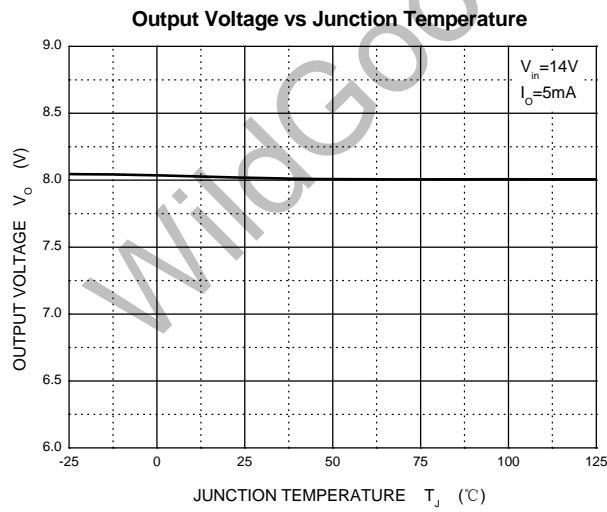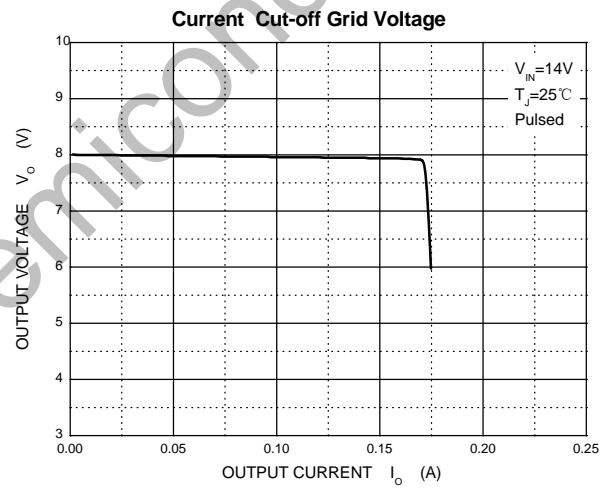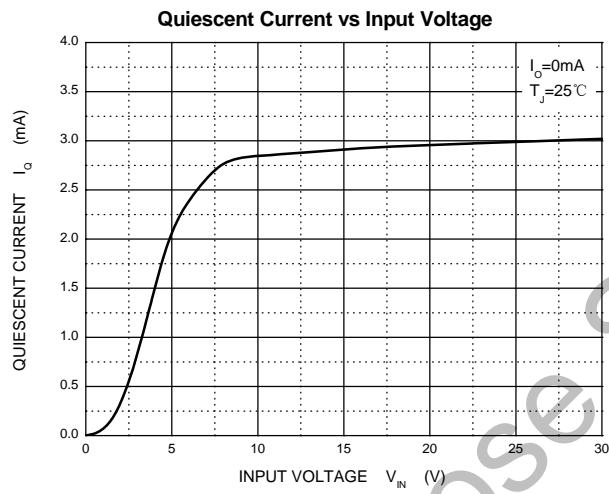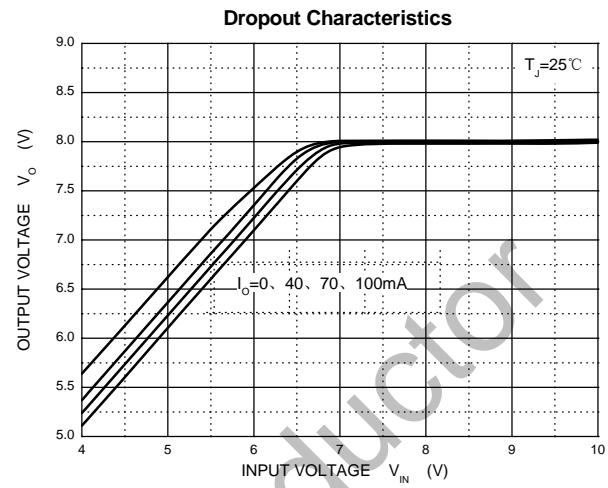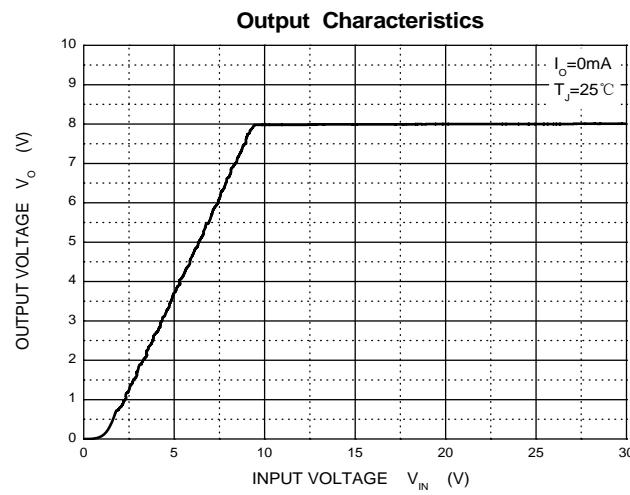

Package Dimension

SOT-89

Unit:mm

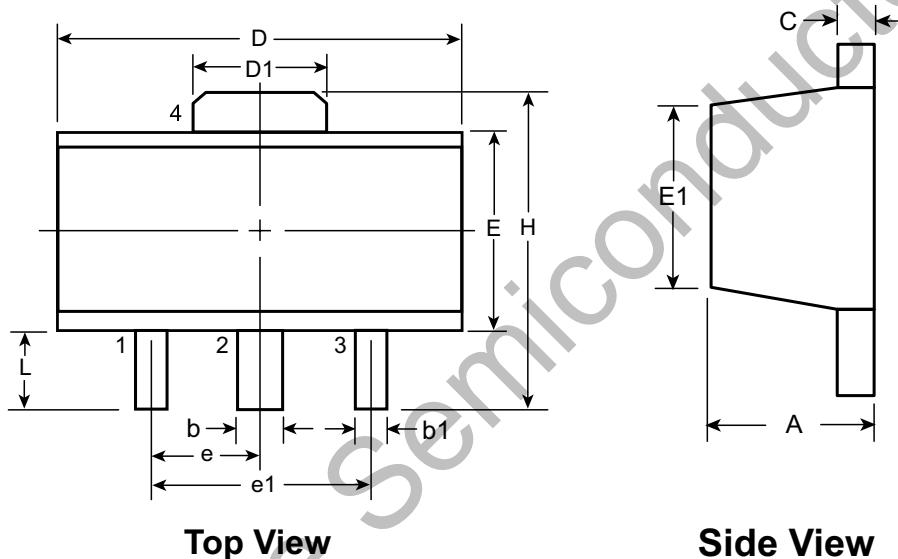

Top View

Side View

Symbol	A	b	b1	C	D	D1	E	E1	e	e1	H	L	
Dimensions (mm)	MIN	1.40	0.44	0.36	0.3	4.40	1.50	2.29	2.00 ^t	1.50 BSC	3.00 BSC	3.94	0.89
	NOM	-	-	-	-	-	-	-	-			-	-
	MAX	1.60	0.56	0.48	0.5	4.60	1.75	2.60	2.29			4.25	1.20

Dimensions in mm