


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
REV	ECNNO	LOCATIONS	DESCRIPTION	DATE	REVISER	

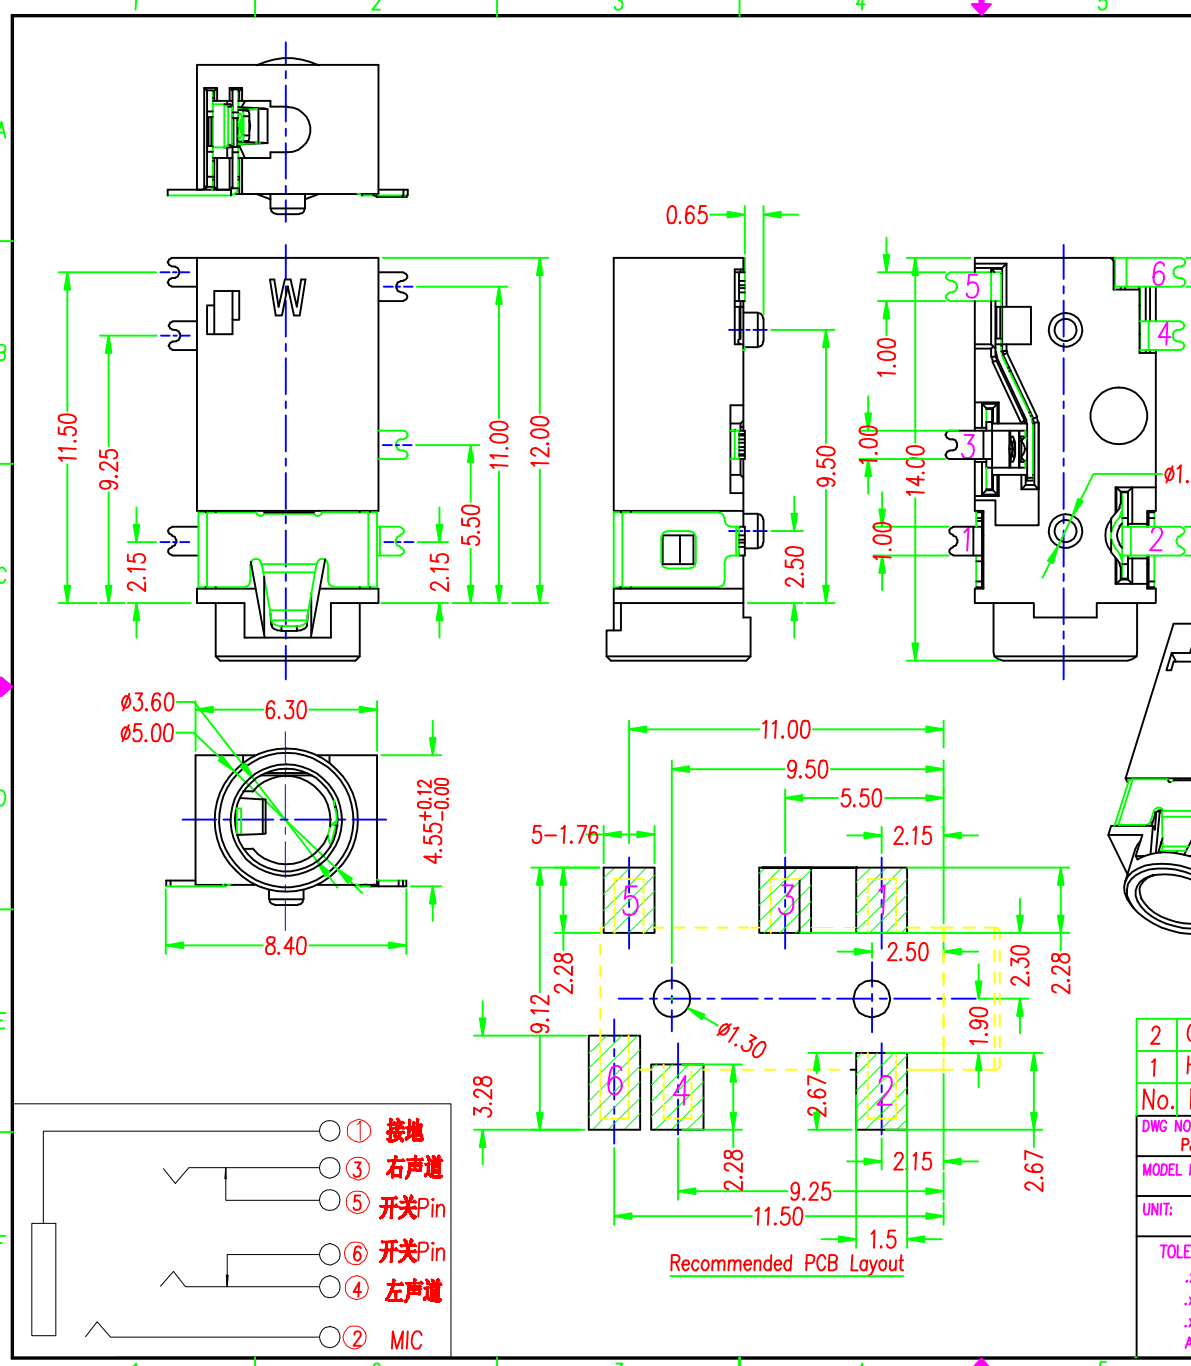

($\phi 3.50\text{mm}$ 4 POLE PLUG DETAIL DRAWING)

1. Specification:
 1.1 Voltage Rating: 250V
 1.2 Current rating: 2 A Max.
 1.3 Dielectric withstanding
 voltage: 250 V(ac) for 1 mW. Min.
 1.4 Contact resistance: 30 mW Max.
 1.5 Insulation resistance: 500 M $^{\circ}\text{C}$
 1.6 Durability: 5000 Cycles
 1.7 Temperature range: $-40^{\circ}\text{C}\sim 80^{\circ}\text{C}$

2	Contact	C5191 T=0.20	50u*Min. Ni underplated all;1~3u*Min.Au plated Contact Area&Solderetails
1	Housing	PPA;Black	UL 94V-0
No.	Name	Material	Finish
DWG NO:	PJ0354-B45011	MATERIAL:	MATERIAL
MODEL NO:	MOLDNO.	FINISH:	FINISH
UNIT:	UNIT	SIZE:	SIZE
TOLERANCE UNSPECIFIED		DR:	DR
.x	.X	CHK:	CHK
.xx	.XX	APP:	APP
.xxx	.XXX	TITLE: PJ-342 板上型双柱耳机插座4.5H	
ANG.	ANG.	PART NO: XDJK-0354-060	
		SCALE:	SCALE
		SHEET:	SHEET
		REV:	REV

深圳市连欣科技有限公司

