
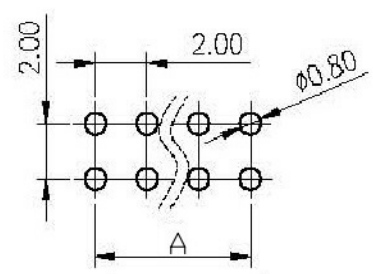
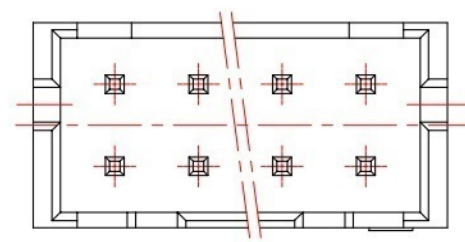


◆SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 800MΩ Min.
- Withstanding voltage: 1000V AC/ minute.
- Contact resistance: 30mΩ Max.

Material:

- Insulator: Nylon PA46 UL 94V-0
- Contact: Brass
- Plating: Tin plated over Nickel
- Circuits: 2*2~2*20

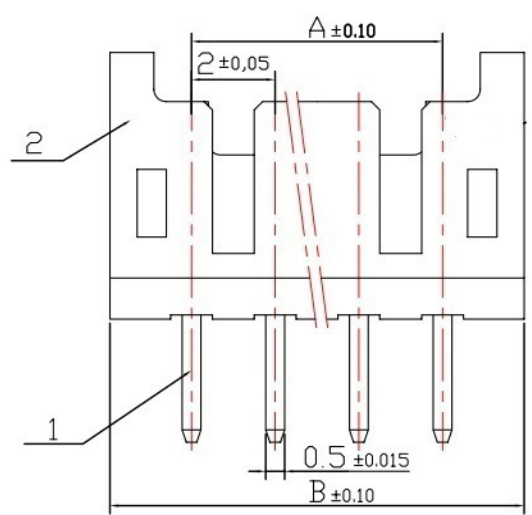

Recommended P.C.B Layout(top side)
Tolerance=±0.05

Circuits	Dimension	
	A	B
2X3	4	7.9
2X4	6	9.9
2X5	8	11.9
2X6	10	13.9
2X7	12	15.9
2X8	14	17.9
2X9	16	19.9
2X10	18	21.9
2X11	20	23.9
2X12	22	25.9
2X13	24	27.9
2X14	26	29.9
2X15	28	31.9
2X16	30	33.9
2X17	32	35.9
2X18	34	37.9
2X19	36	39.9
2X20	38	41.9

F	④				GENERAL TOLERANCE		UNIT: mm	DATE	TITLE: PHD2.0-2*NP WAFER			深圳市连欣科技有限公司		
	③				.X±0.30	X°±1°	DRAWN: 阙昕皓	2016.10.11						
	②				.XX±0.20	.X°±	CHECKED:		VER.	SCALE:	N/A	PROJECT	PART NO.	XDFW-PHD2013-2*NP
	①				.XXX±0.10	.XX°±	APPROVED:		A1	SHEET:	1/1	DRAWING NO.	2012WHD202-2-S	
	LTR	NAME	DATE	VERSION RECORD										
	1	2	3	4	5	6	7	8	9					