


Features

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types: BCP54/BCP55/BCP56 (NPN)

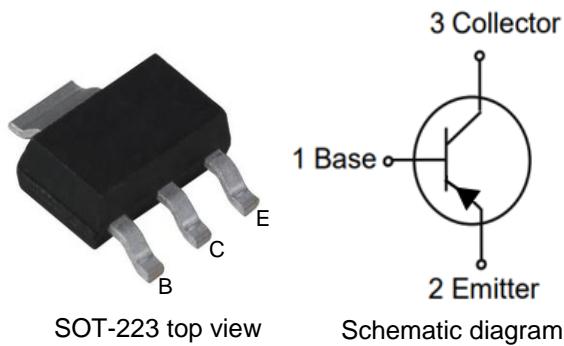

Maximum Ratings(Ta=25°C unless otherwise noted)

Symbol	Parameter	BCP51	BCP52	BCP53	Unit
V_{CBO}	Collector-Base Voltage	-45	-60	-100	V
V_{CEO}	Collector-Emitter Voltage	-45	-60	-80	V
V_{EBO}	Emitter-Base Voltage		-5		V
I_C	Collector Current -Continuous		-1		A
I_{CM}	Peak Pulse Collector Current		-2		A
I_B	Base Current-Continuous		-100		mA
I_{BM}	Peak Pulse Base Current		-200		mA
P_C	Collector Power Dissipation		1.5		W
$R_{\Theta JA}$	Thermal Resistance From Junction To Ambient		94		°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range		-55~+150		°C



Electrical Characteristics (TJ=25°C unless otherwise noted)


Symbol	Parameter		Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage		$I_C=-100\mu A, I_E=0$	-45	--	--	V
	BCP51	-60		--	--		
	BCP52	-100		--	--		
$V_{(BR)CEO}$	Collector-emitter breakdown voltage		$I_C=-10mA, I_B=0$	-45	--	--	V
	BCP51	-60		--	--		
	BCP52	-80		--	--		
$V_{(BR)EBO}$	Emitter-base breakdown voltage		$I_E=-10\mu A, I_C=0$	-5	--	--	V
I_{CBO}	Collector cut-off current		$V_{CB}=-30V, I_E=0$	--	--	-100	nA
h_{FE1}	DC current gain		$V_{CE}=-2V, I_C= -5mA$	25	--	--	--
h_{FE2}			$V_{CE}=-2V, I_C= -150mA$	63	--	250	
h_{FE3}			$V_{CE}=-2V, I_C= -500mA$	25	--	--	
$V_{CE(sat)}$	Collector-emitter saturation voltage		$I_C=-500 mA, I_B= -50mA$	--	--	-0.5	V
f_T	Transition frequency		$V_{CE}=-10V, I_C= -50mA, f=100MHz$	100	--	--	MHz
V_{BE}	Base-emitter voltage		$V_{CE}=-2V, I_C= -500mA$	--	--	-1	V

Ordering Information (Example)

Type	Hfe	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BCP51	63-160	BCP51-10	2,500	5,000	35,000	13"reel
	100-250	BCP51-16				
BCP52	63-160	BCP52-10	2,500	5,000	35,000	13"reel
	100-250	BCP52-16				
BCP53	63-160	BCP53-10	2,500	5,000	35,000	13"reel
	100-250	BCP53-16				

Typical Operating Characteristics

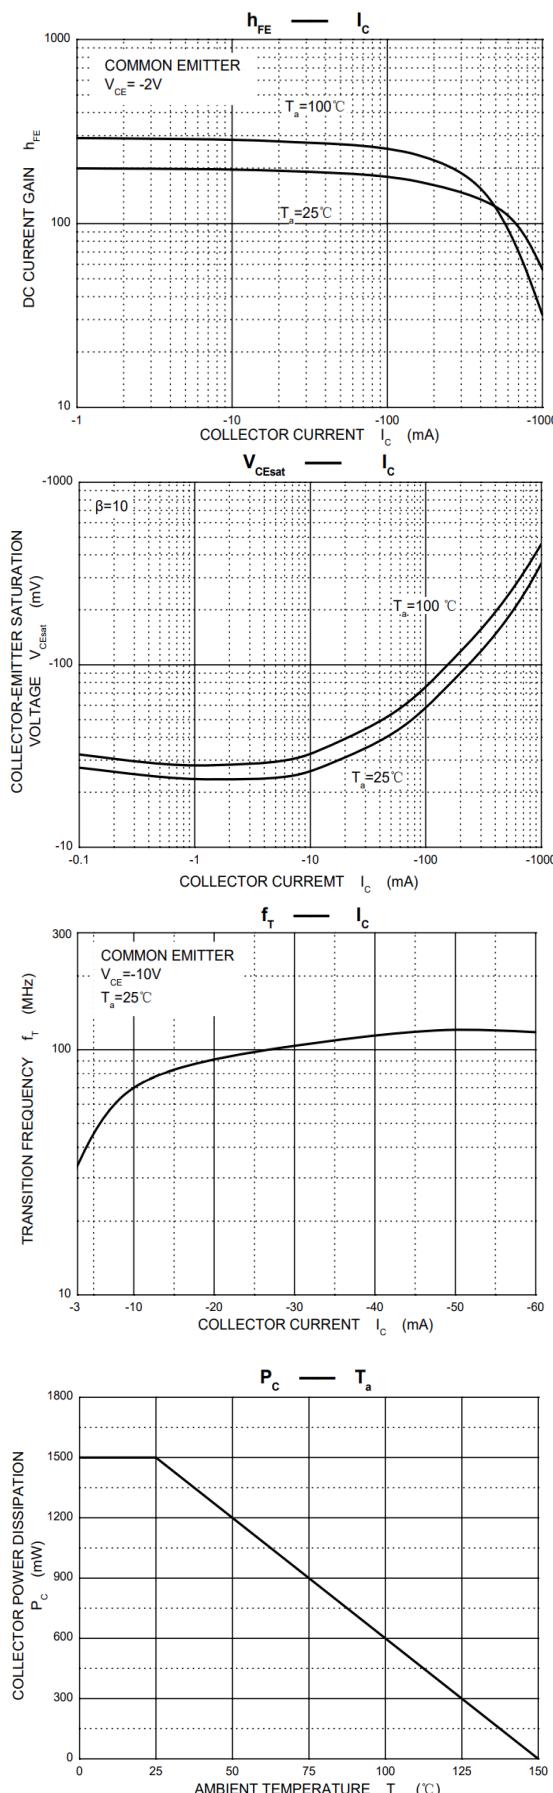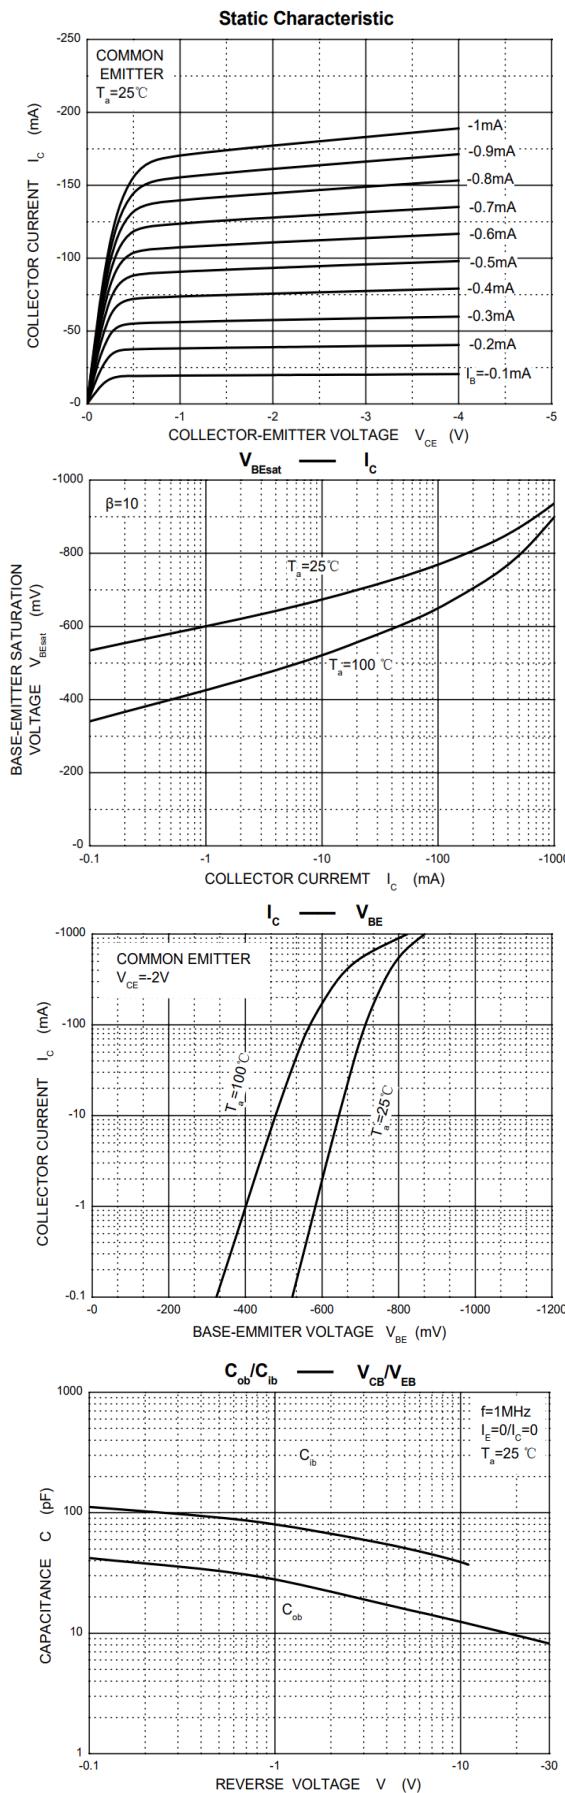

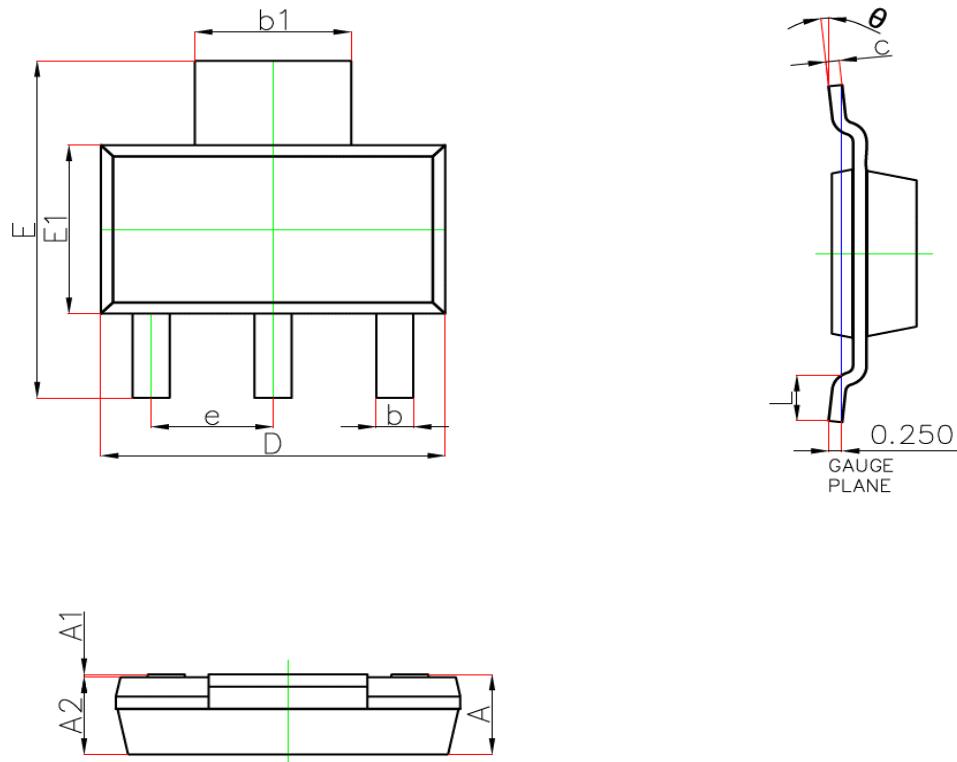SOT-223 Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°