REVISION U

DESIGNED AND DIMENSIONED IN MILLIMETERS[INCHES] ALL DIMENSIONS REFERENCE EXCEPT AS SHOWN

DO NOT SCALE FROM THIS PRINT

P6) THIS PRODUCT MANUFACTURED WITH LEAD-FREE PROCESSING

CABLE CALLOUT 047-A: CCA-047-PFA CABLE

> END 1 CONNECTOR (SEE TABLE 2, SHT 2)


OVERALL ASSEMBLY LENGTH (OAL) XXXX (MILLIMETERS) (0100 MIN)

END 2 CONNECTOR (SEE TABLE 2, SHT 2)



FIG 1 RF047-A-M0SJ-M0SP-XXXX SHOWN (PROTECTIVE CAPS NOT SHOWN FOR CLARITY)

TABLE 1					
OVERALL LENGTH	"G"				
0100-0300 [5.98-11.81]	+5.0 [.20] / -0.0 [.00]				
0301-1500 [11.85-59.01]	+12.0 [.47] / -0.0 [.00]				
1501-3000 [59.09-118.11]	+25.0 [.98] / -0.0 [.00]				
3001-7500 [118.15-295.28]	+50.0 [1.97] / -0.0 [.00]				
7501-9999 [295.31-393.67]	+1% / -0.0 [.00]				

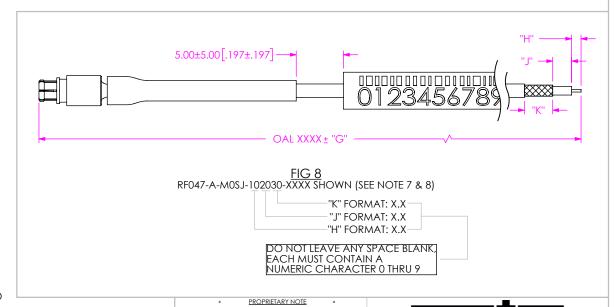

NOTES:

- 1. NOTE DELETED.
- 2. NOTE DELETED.
- 3. CONNECTORS TO BE ORIENTED ACCORDING TO CO-RF-WI-3048-M.
- 4. CABLE ASSEMBLY TO HAVE PROTECTIVE CAPS ASSEMBLED ON EACH END AND INDIVIDUALLY PACKAGED IN ESD BAG.
- 5. ASSEMBLY TO BE 100% TESTED FOR RETURN LOSS AND INSERTION LOSS. LABEL EACH INDIVIDUAL CABLE ASSEMBLY WITH 1 LABEL-SER-02. RETURN LOSS SPECIFICATION IS EQUAL TO THE HIGHEST END OPTION LIMIT.
- 6. CABLE LENGTHS LONGER THAN 1000 MILLIMETERS ARE NOT SUPPORTED BY S.I. TEST DATA.
- 7. DIM "H", "J", AND "K" HAVE A MINIMUM VALUE OF 0.0mm & A MAXIMUM VALUE OF 9.9mm[.39"]
- 8. FOR STRIPPED AND TINNED OPTION, BOTH THE CENTER CONDUCTOR IS TINNED.

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY

OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING DESCRIPTION CENTER CONTACTS: COPPER ALLOY SHEET SCALE: 3:1 OUT CONTACTS:

-MOSP/-MOS I/MOR I/-MOR I/-O1SP/-O18 I/-O1SR/-OOS I/-OOM I: COPPER ALLOY

-92SP/-92SJ/-18SP/-18SJ/-24SP/-24SJ/ -13BJ/-13SP: STAINLESS STEEL INSULATORS:

-13BJ: VIRGIN PTFE -00SJ/-00MJ:PEER

NOGE/HONGS./-MOBJ/-MOBJ/-01SP/-01BJ/-01SB/-00SJ/-00MJ: VIRGIN PTFE FLUOROCARBON -92SP/-92SJ/-18SJ/-18SJ/-24SP/-24SJ: ULTEM -13BJ/-13SP: PCTFE

RF047-A CABLE ASSEMBLY

FAX: 812-948-5047

520 PARK EAST BLVD, NEW ALBANY, IN 47150

PHONE: 812-944-6733

e-Mail info@SAMTEC.com

BY: SHERRY W 2/5/2018 SHEET 1 OF 12

F:\DWG\MISC\MKTG\RF047-A-XXXX-XXXXXXXXXX-MKT.SLDDRW

REVISION U

				TABLE 2			
END ample			FINISH				
OPTION	SERIES	GENDER	CENTER CONTACT	OUTER CONTACT	CABLE BODY	CONNECTOR KIT P/N	FIGURE
-M0SP	SMPM	PLUG FULL DETENT	30µ" GOLD	10μ" GOLD	3μ" GOLD	PRFM0-P-C-HG-047A-SD	SHT 3, FIG 2
-M0SJ	SMPM	JACK	30µ" GOLD	10μ" GOLD	3μ" GOLD	PRFM0-J-C-HG-047A-SD	SHT 3, FIG 3
-92SP	2.92 MM	PLUG	50μ" GOLD	PASSIVATED	PASSIVATED	PRF92-P-C-EP-047A-SS	SHT 4, FIG 4
-92SJ	2.92 MM	JACK	50μ" GOLD	PASSIVATED	PASSIVATED	PRF92-J-C-EP-047A-SS	SHT 4, FIG 5
-18SP	1.85 MM	PLUG	50μ" GOLD	PASSIVATED	PASSIVATED	PRF18-P-C-EP-047A-SS	SHT 5, FIG 6
-18SJ	1.85 MM	JACK	50μ" GOLD	PASSIVATED	PASSIVATED	PRF18-J-C-EP-047A-SS	SHT 5, FIG 7
-24SP	2.4 MM	PLUG	50µ" GOLD	PASSIVATED	PASSIVATED	PRF24-P-C-EP-047A-SS	SHT 6, FIG 9
-24SJ	2.4 MM	JACK	50μ" GOLD	PASSIVATED	PASSIVATED	PRF24-J-C-EP-047A-SS	SHT 6, FIG 10
-M0RJ	SMPM	RIGHT ANGLE JACK	50μ" GOLD	50μ" GOLD	50µ" GOLD	PRFM0-J-C-EE-047A-RD	SHT 7, FIG 11
-M0BJ	SMPM	BULKHEAD JACK	50μ" GOLD	50µ" GOLD	50μ" GOLD	PRFM0-J-C-EE-047A-BD	SHT 7, FIG 12
-13SP	1.35 MM	PLUG	50μ" GOLD	PASSIVATED	PASSIVATED	PRF13-P-C-VP-047A-SS	SHT 8, FIG 13
-13BJ	1.35 MM	JACK	50μ" GOLD	PASSIVATED	PASSIVATED	PRF13-J-C-VP-047A-BS	SHT 8, FIG 14
-GC47	SMPM	JACK	50μ" GOLD	PASSIVATED	PASSIVATED	PRFM0-J-C-EE-047A-SD-1	SHT 9, FIG 15
-10SP	1.0 MM	PLUG	50μ" GOLD	PASSIVATED	PASSIVATED	PRF10-P-C-VP-047A-SS-X	SHT 9, FIG 16
-10BJ	1.0 MM	JACK	50μ" GOLD	PASSIVATED	PASSIVATED	PRF10-J-C-VP-047A-BS-X	SHT 10, FIG 17
-01SP	SMA	PLUG	50μ" GOLD	10μ" GOLD	10μ" GOLD	PRF01-P-C-EG-047A-SD	SHT 10, FIG 18
-01BJ	SMA	BULKHEAD JACK	50µ" GOLD	10μ" GOLD	10μ" GOLD	PRF01-J-C-EG-047A-BD	SHT 11, FIG 19
*-01SB	SMA	SEALED BULKHEAD JACK	50μ" GOLD	10µ" GOLD	10µ" GOLD	PRF01-J-C-EG-047A-BD-1	SHT 11, FIG 20
*-00SJ	SMP	JACK	50μ" GOLD	50μ" GOLD	50μ" GOLD	PRF00-J-C-EE-047A-SD-X	SHT 12, FIG 21
*-00MJ	SMP	R/A JACK	50μ" GOLD	50μ" GOLD	50μ" GOLD	PRF00-J-C-EE-047A-RD-1-X	SHT 12, FIG 22
**-SING	SINGLE ENDED STRIPPED & TINNED	-	-	-		-	-

^{* =} NOT RELEASED

TABLE 3								
END OPTION	MAXIMUM VSWR	MAXIMUM RETURN LOSS	MAXIMUM INSERTION LOSS (IL)	FREQUENCY	PROTECTIVE CAP COLOR			
-M0SP	1.40:1	-15.56 dB	0.28	DC TO 40 GHz	GRAY			
-M0SJ	1.40:1	-15.56 dB	0.28	DC TO 40 GHz	GRAY			
-92SP	1.35:1	-16.45 dB	0.28	DC TO 40 GHz	YELLOW			
-92SJ	1.35:1	-16.45 dB	0.28	DC TO 40 GHz	YELLOW			
-18SP	1.40:1	-15.56 dB	0.37	DC TO 67 GHz	BLUE			
-18SJ	1.40:1	-15.56 dB	0.37	DC TO 67 GHz	BLUE			
-24SP	1.35:1	-16.45 dB	0.32	DC TO 50 GHz	GREEN			
-24SJ	1.35:1	-16.45 dB	0.32	DC TO 50 GHz	GREEN			
-M0RJ	1.40:1	-15.56 dB	0.20	DC TO 20 GHz	N/A			
-M0BJ	1.40:1	-15.56 dB	0.28	DC TO 40 GHz	N/A			
-13SP	1.40:1	-15.56 dB	0.39	DC TO 90 GHz	GRAY			
-13BJ	1.40:1	-15.56 dB	0.39	DC TO 90 GHz	GRAY			
-GC47	1.40:1	-15.56 dB	0.28	DC TO 40 GHz	N/A			
-10SP	400D	1.40:1	-15.56 dB	0.4	DC TO 90 GHz	VACI IITE		
	1.50:1	-13.97 dB	0.4	90 GHz TO 110 GHz	WHITE			
-10BJ	1.40:1	-15.56 dB		DC TO 90 GHz	VA/LUTE			
	1.50:1	-13.97 dB	0.4	90 GHz TO 110 GHz	WHITE			
-01SP	1.30:1	-17.7 dB	0.23	DC TO 26.5 GHz	BROWN			
-01BJ	1.30:1	-17.7 dB	0.23	DC TO 26.5 GHz	BROWN			
*-01SB	1.30:1	-17.7 dB	0.23	DC TO 26.5 GHz	BROWN			
*-00SJ	*-00S.I	1.20:1	20.83 dB	0.5	DC TO 26.5 GHz	WHITE		
	1.50:1	14.0 dB		26.5 GHz TO 40 GHz				
*-00MJ	1.20:1	20.83 dB	0.5	DC TO 26.5 GHz	WHITE			

IL Max [dB] for cable assembly:

= (35.06°SQRT(Freq[GHz])+1.835°Freq[GHz])*OAL[mm]/30480+End Option IL#1{See Table 3}+End Option IL#2{See Table 3}
*= NOT RELEASED

F:\DWG\MISC\MKTG\RF047-A-XXXX-XXXXXX-XXXX-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

> DO NOT SCALE DRAWING SHEET SCALE: 4:1




DESCRIPTION:


RF047-A CABLE ASSEMBLY


RF047-A-XXXX-XXXXXXXXXXXXX


BY: SHERRY W


2/5/2018 SHEET 2 OF 12

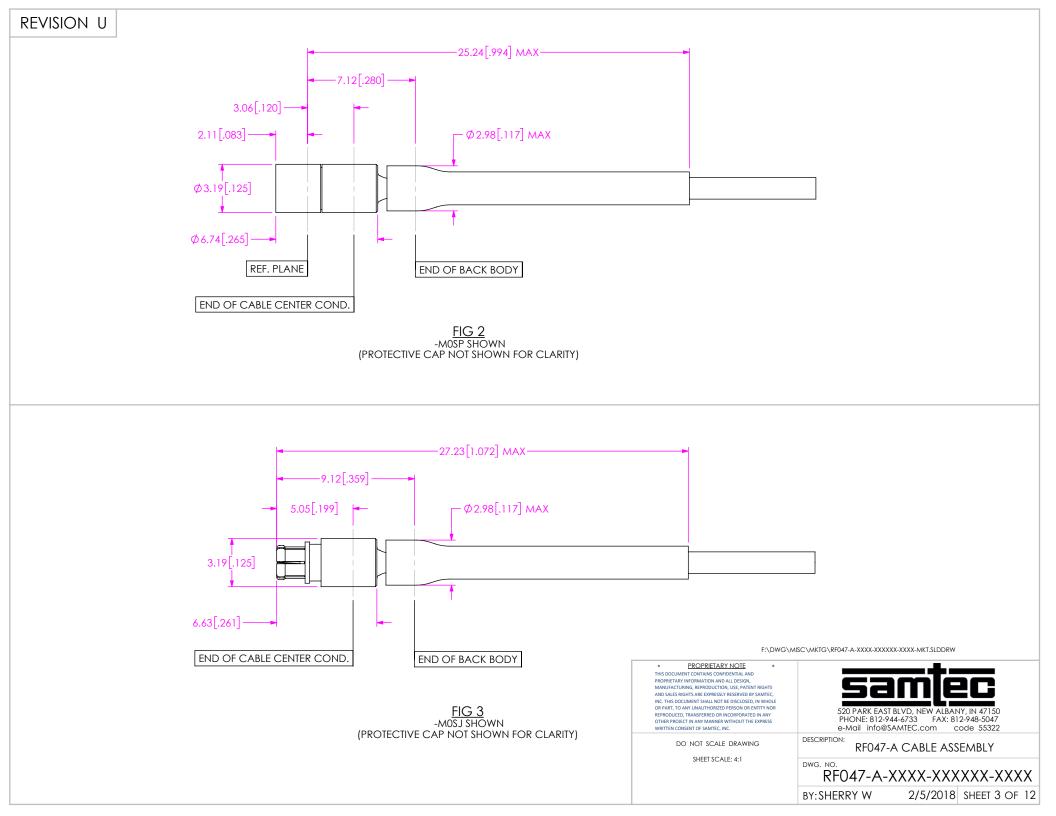


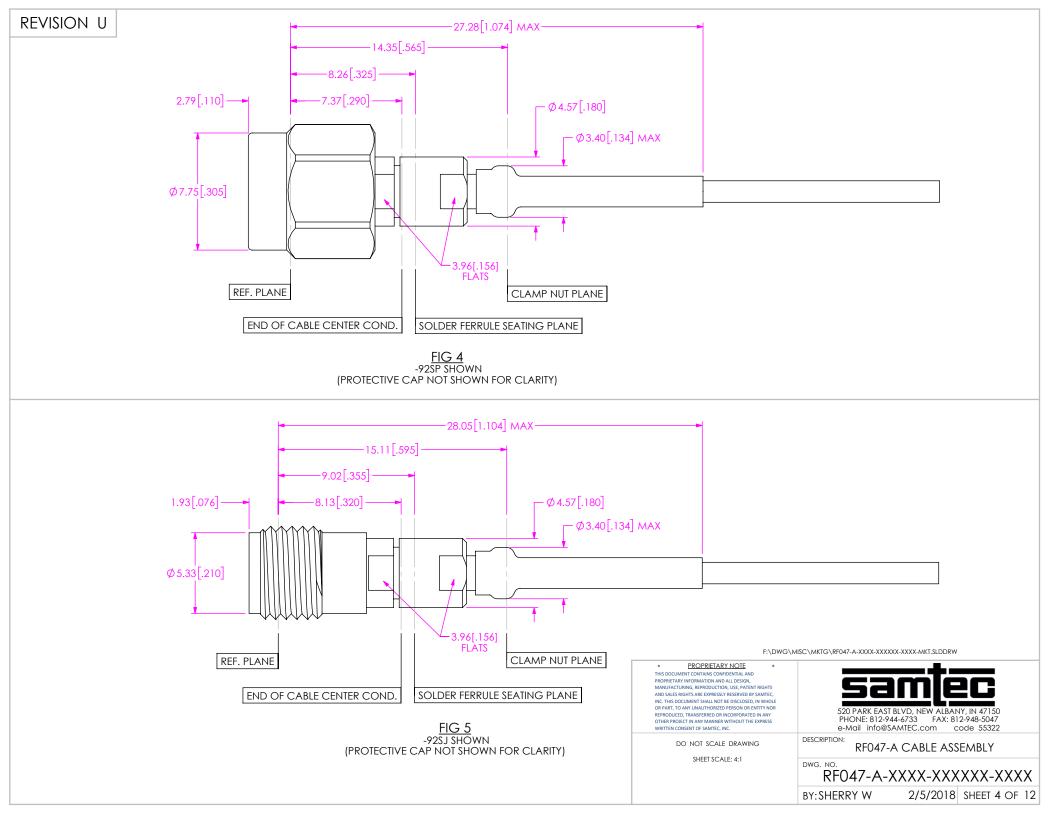


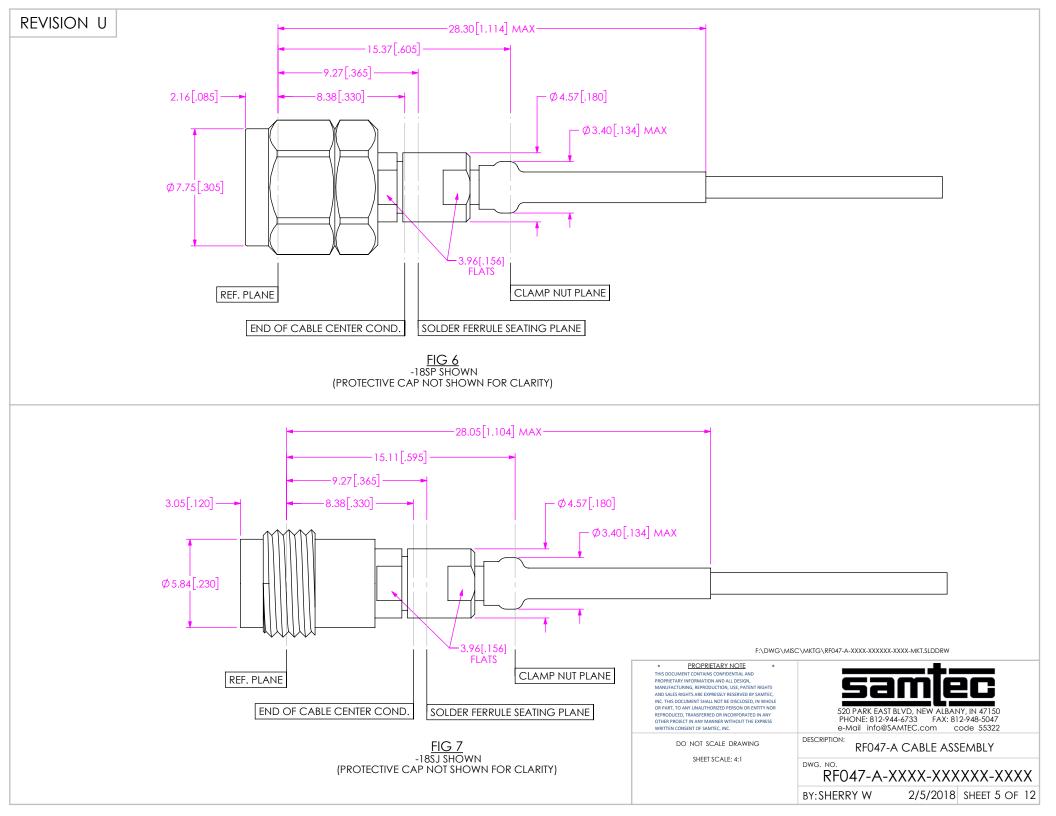

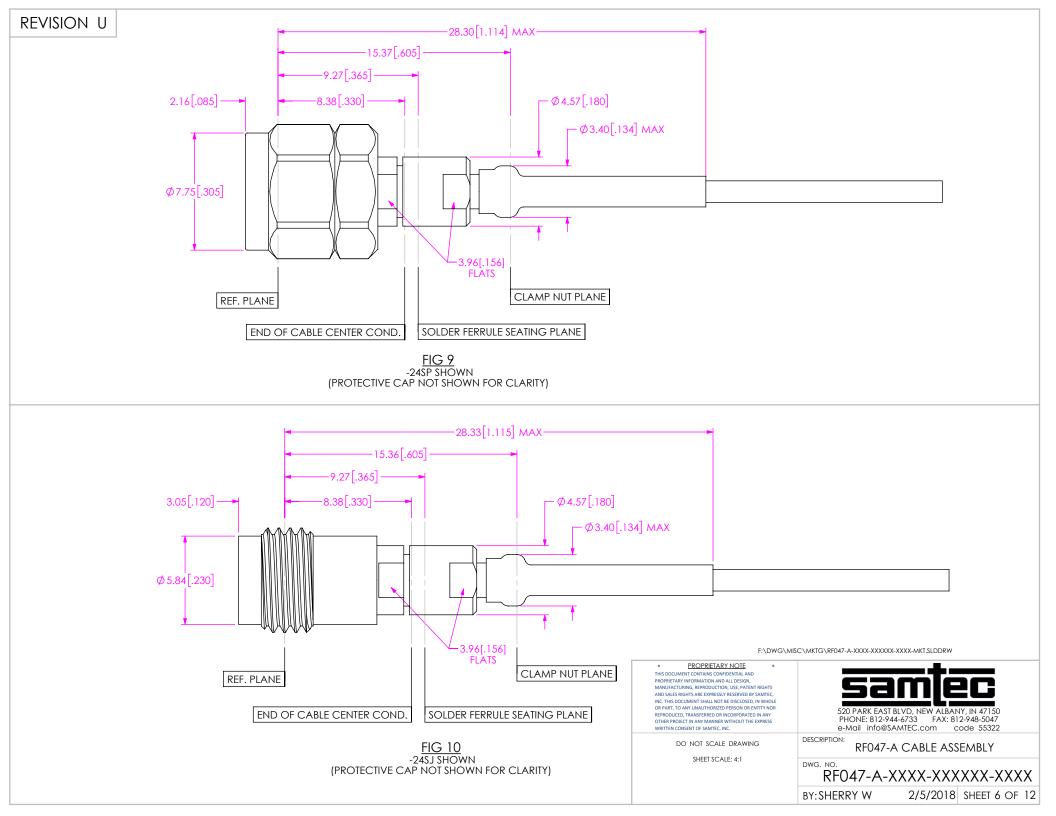

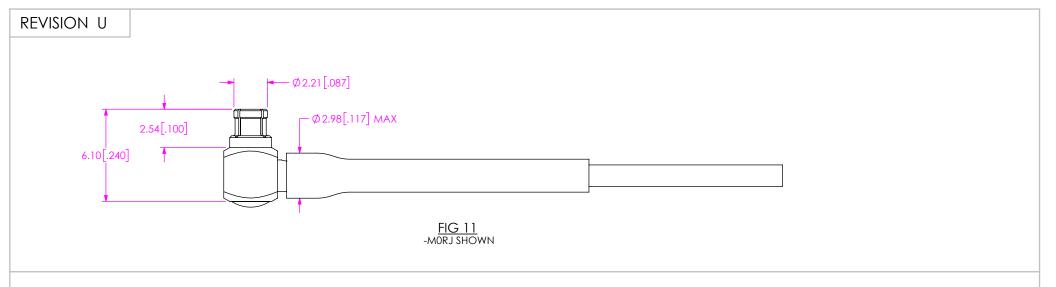

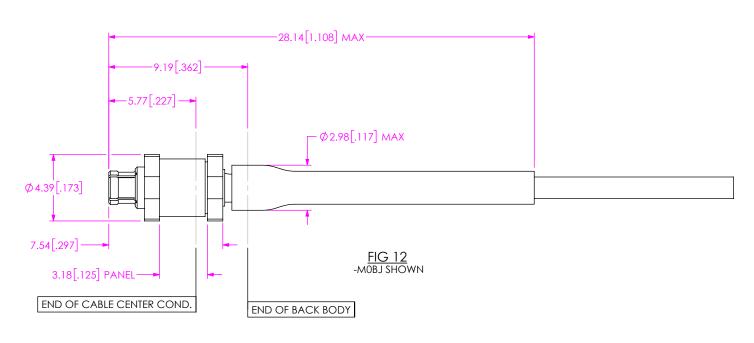

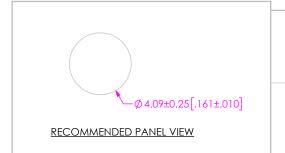

F:\DWG\MISC\MKTG\RF047-A-XXXX-XXXXXXXXX-MKT.SLDDRW

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

SHEET SCALE: 4:1




520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322


DESCRIPTION:

RF047-A CABLE ASSEMBLY

RF047-A-XXXX-XXXXXXXXXXXXXX

2/5/2018 SHEET 7 OF 12 BY: SHERRY W

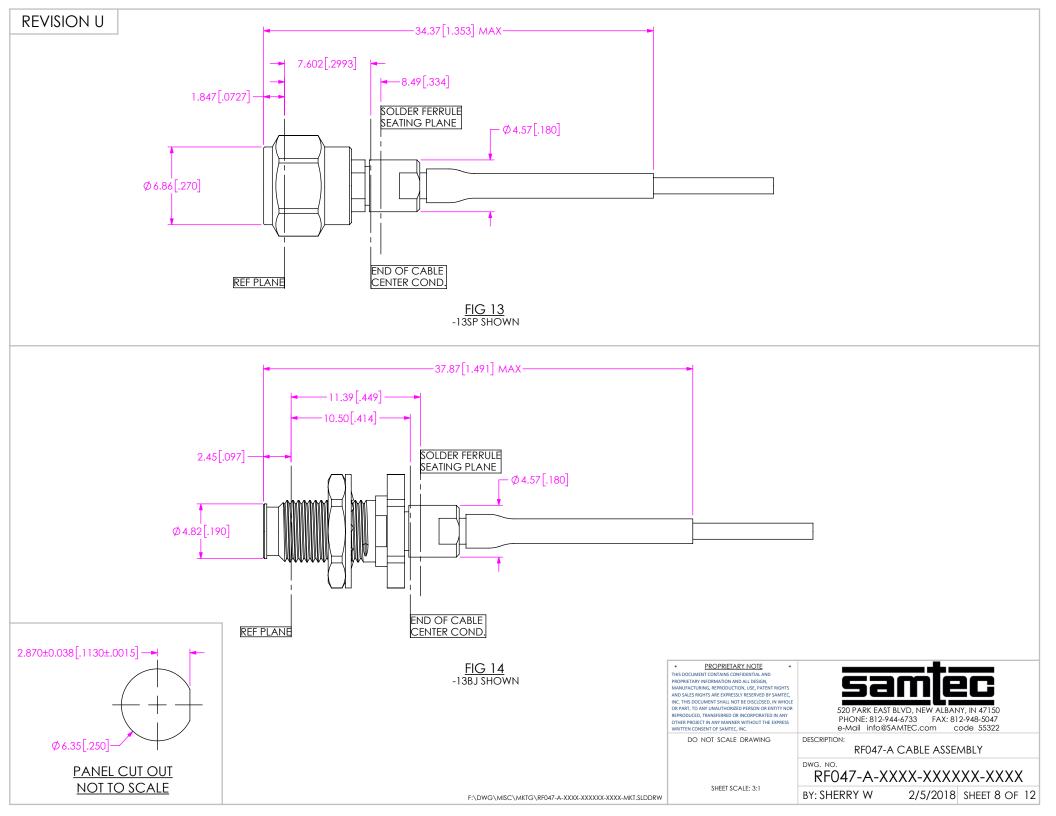

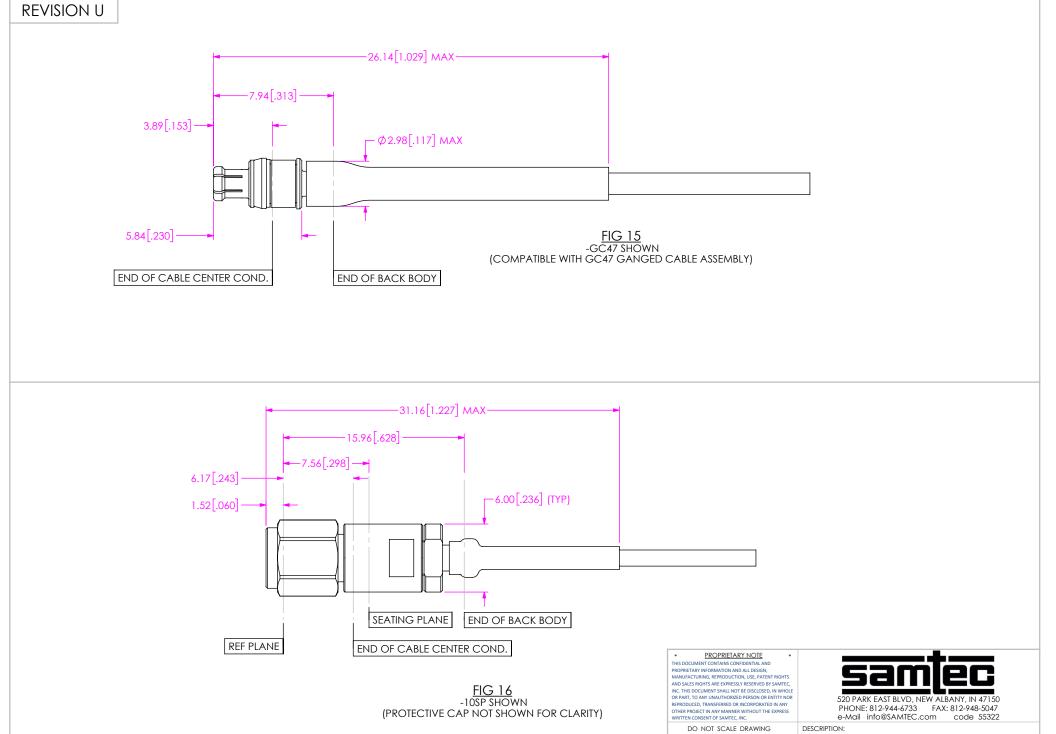



F:\DWG\MISC\MKTG\RF047-A-XXXX-XXXXXX-XXXX-MKT.SLDDRW


SHEET SCALE: 4:1

RF047-A CABLE ASSEMBLY

Property W 2/5/2018 SHEET 9 OF 12

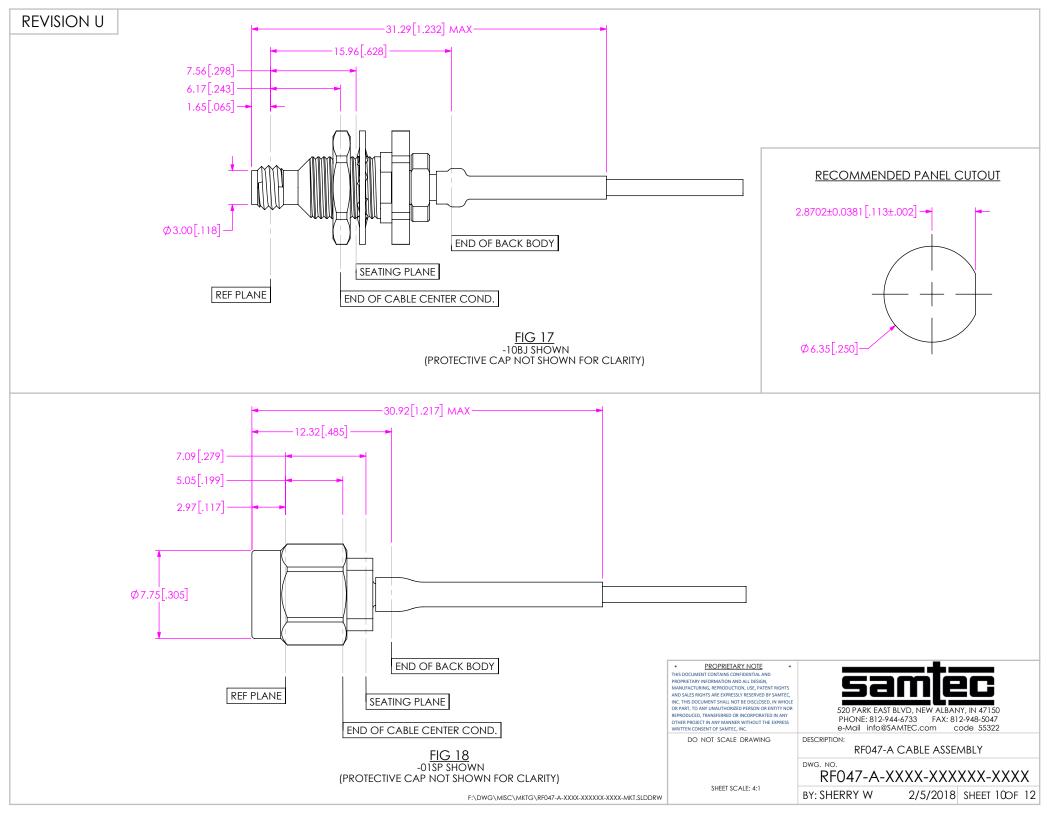

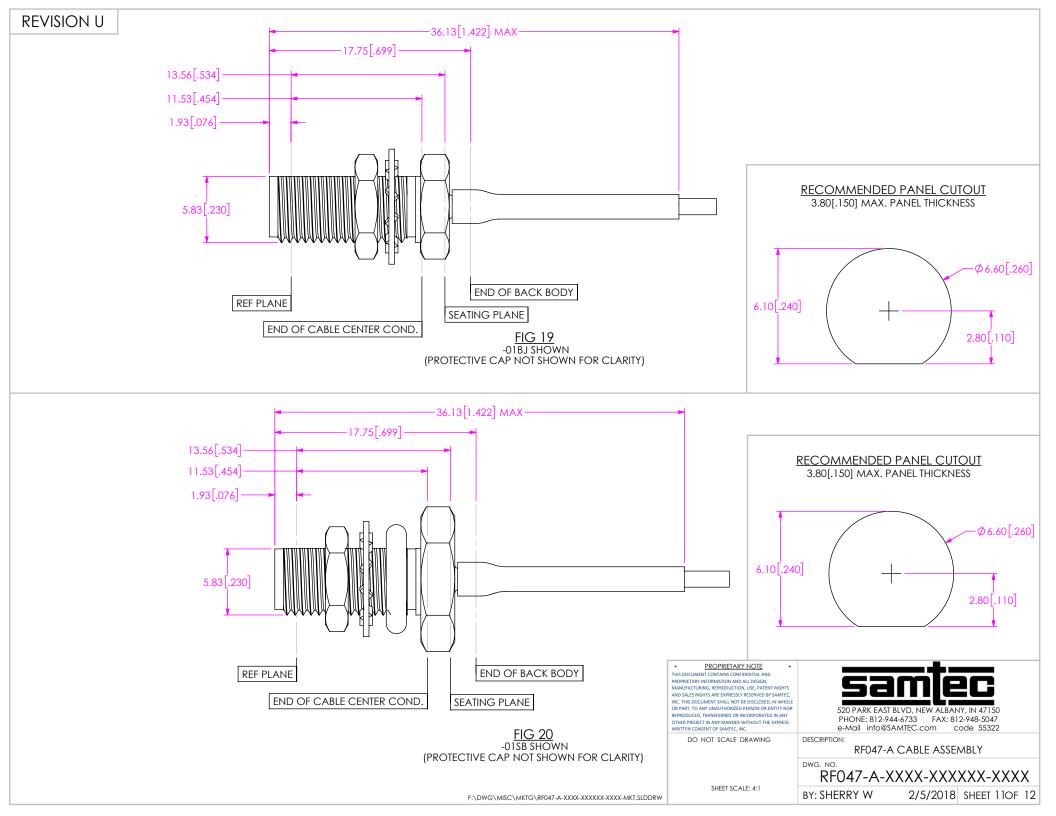

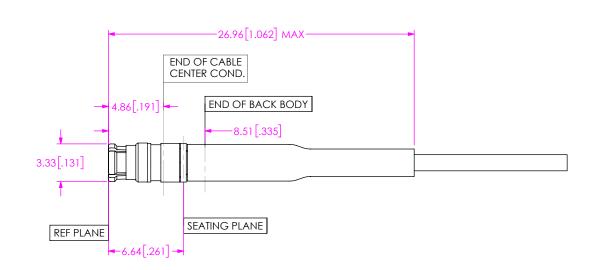

REVISION U

FIG 21 -015J SHOWN (PROTECTIVE CAP NOT SHOWN FOR CLARITY)

