

NOTES1:

- UL Standard
- 1. Rated voltage/current : 150V / 8A
- 2. Withstanding voltage : AC1250V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	10A

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 2.54mm, Poles : N=04~48P
- 3. Operating temperature: -40°C~+105°C
- 4. Undimensioned tolerances:







Pitch range in mm	Nominal dimension range in mm				Tolerance
	Over	TO	TO	Over	
6	10	TO	30	Over	0.1/10
TO	TO	TO	TO	TO	≤
6	10	24	30	60	100
				100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
				±1.00	±1.30
					±2°

5. RoHS Compliance

Ordering Information

JL15EDGRHDM-254 XX

B 0 1

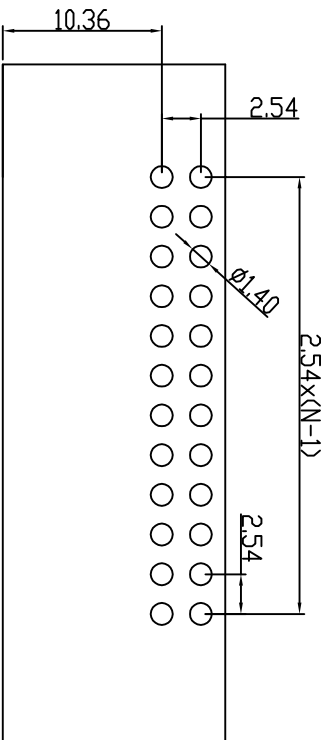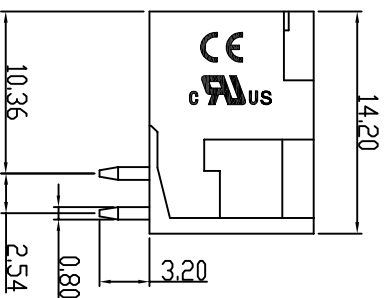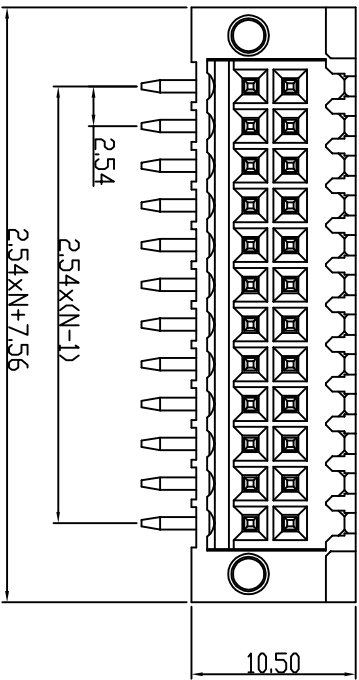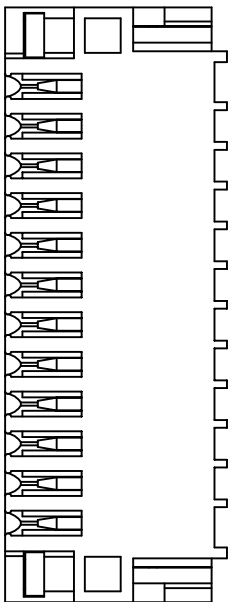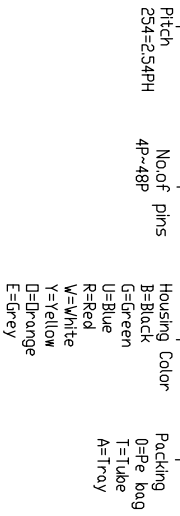

PCB LAYOUT

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.12.15

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL15EDGRHDM-254XXB01
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO		SIZE	A4	TITLE:	JL15EDGRHDM-254-2XNP插拔式公座黑色/带耳
			SHEET	1/1		
			PRD.			

JILIN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD