© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F1	NOTE 1 0.76µm PLATING UPDATE (PdNi+AuFLASH)	12JUL2023	BGC	PS

POS. PER ROW "n"	L±0.4	PART NO.
2	4.58	829538 -2
3	7.12	829538 -3
4	9.66	829538 -4
5	12.20	829538 -5
6	14.74	829538 -6
7	17.28	829538 -7
8	19.82	829538 -8
15	37.60	1- 829538 -5

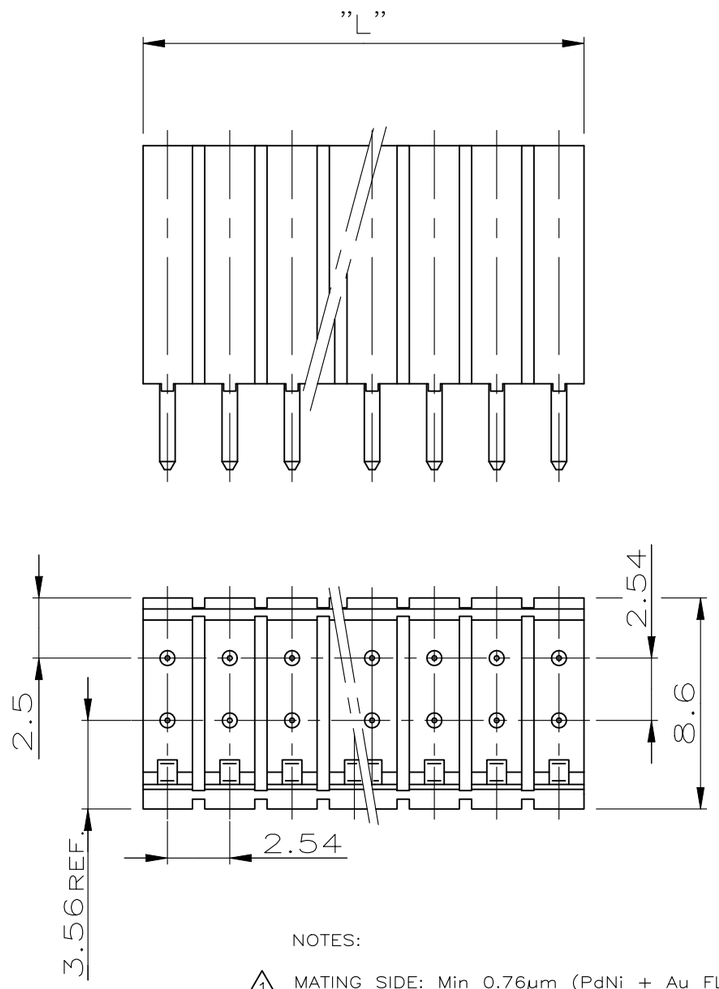

NOTES:

1. MATING SIDE: Min 0.76µm (PdNi + Au FLASH)IN ZONE "F" OVER Min 1.27µm Ni
(Alternative plating – Min 0.76µm Au OVER Min 1.27µm Ni)
SOLDER SIDE: MIN. 3.0µm TIN OVER Min 1.27µm NICKEL

POS. [ITEM NO.]	BENENNUNG EINZELTEIL [DESCRIPTION]	WERKSTOFF [MATERIAL]	OBERFLÄCHE FARBE [FINISH]
2	CONTACT PIN KONTAKTSTIFT	CuZn	1
1	PIN HOUSING STIFTGEHÄUSE	PA 4/6	BLACK SCHWARZ

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN MULLER 09FEB1990
CHK SCHAARSCHMIDT 12FEB1990
APVD – –
PRODUCT SPEC 108-18012
APPLICATION SPEC –
WEIGHT –

CUSTOMER DRAWING

TE Connectivity

NAME: AMPMODU II PIN HEADER, DUAL ROW

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-829538	–

SCALE	SHEET	REV
4:1	1 OF 1	F1