


SCMD4D10C

SMD POWER INDUCTORS

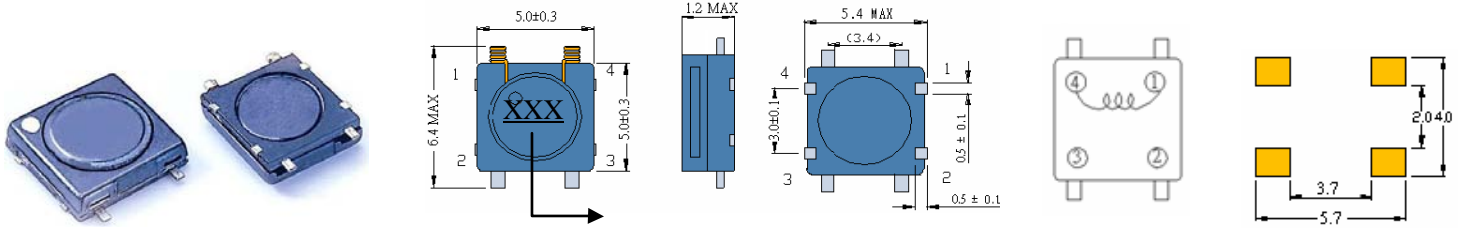



• Features

1. Magnetically shielded construction – Low EMI
2. Excellent Power Density
3. Engineered to Provide High Efficiency
4. Low Profile



ELECTRICAL CHARACTERISTICS

Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (3) (A)	Temperature Current (4) (A)
SCMD4D10C-3R3	3.3	100KHZ	0.20	1.37	1.16
SCMD4D10C-4R7	4.7	100KHZ	0.28	1.12	0.96
SCMD4D10C-6R8	6.8	100KHZ	0.38	1.10	0.80
SCMD4D10C-100	10	100KHZ	0.60	0.82	0.64
SCMD4D10C-150	15	100KHZ	0.90	0.67	0.50
SCMD4D10C-220	22	100KHZ	1.30	0.55	0.42
SCMD4D10C-330	33	100KHZ	1.75	0.45	0.36
SCMD4D10C-470	47	100KHZ	2.80	0.40	0.30

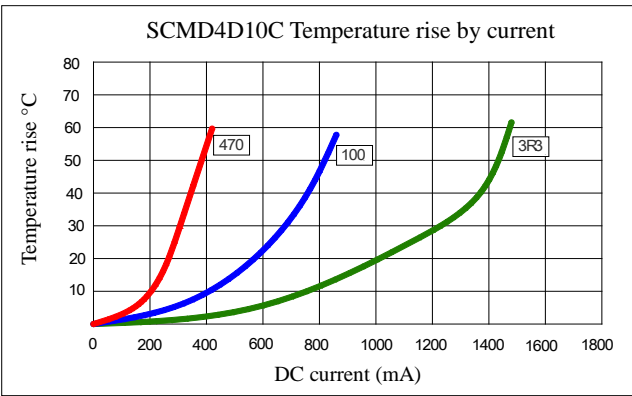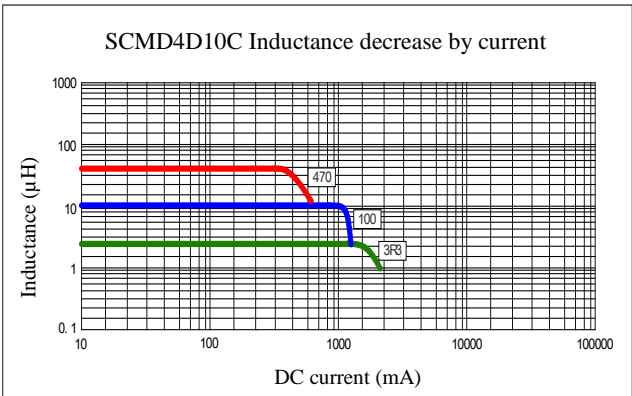

- (1). Inductance tolerance±20% tested at 0.25V, 0ADC and 25°C.
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 10% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

© 2019 Signal Transformer –Specification subject to change without notice. 12.19