
	m m	D		0	œ		
	ØS						
				LAYOU	IT SHOWN AS EXAMPLE		
	Keying Shown as example						
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal						
-Shell Material: Composite-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy	ØS 35.7 Max Z' 31.5 Max VV THREAD M25x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum					Country Juris FR	diction & Control List Not Listed	
-Durability : 500 Mating cycles -Delivered without Souriau contacts			PN: 8D517J06SAL				
-Temperature Range : -65°C to +175°C		A	A 14-10-2016	First Release			
-Salt Spray : 2000 hours -Mass : 25.9 g ± 10%			S DATE	Latest modification -	by		MOD N°
		Des	igned By:	Date:		CUSTOMER DRAWING	
			TITLE		Composite Plug 8	BD series	
BASIC SERIES: 8D 5 - 17	J 06 S A L Delivered W/O		SCALE -		General linear Tolerances: ±	NPRDS / PROJECT <b>859</b>	
SHELL TYPE : Plug with RFI Shielding					OURIAU.COM	This document is the pro SOURIAU it must not be reprodu	
SHELL TYPE : Plug with RFI Shielding         CONTACT TYPE : Standard Crimp Contact		<u> </u>	OURIAU	00 00 00.50			
	ORIENT CONTACT TYPE : SOCKET(500 CONTACT LAYOU	) Matings)			SOURIAU DRG N°	communicated without pe	

	τ		Q	г	m			0	
		Conta	ct Layout						
4			$\stackrel{+Y}{\bigoplus} \stackrel{B}{\bigoplus} +x$						
		Contact	e						
ى	Shell A size 17	(n A +.121 B +.241 C +.000 D241 E121 F +.000 rrangement Number of	Im)         (mm)           (3.07)         +.209 (5.31)           (6.12)         +.000 (0.00)           (0.00)        241 (6.12)           (6.12)         +.000 (0.00)           (3.07)         +.209 (5.31)           (0.00)         +.000 (0.00)           3.07)         +.209 (5.31)           (0.00)         +.000 (0.00)	sedes 053-6					
				<u></u>				SOURIAU shall not be li due to a use of the P the Specifications issued	roducts w by either c
2								(professional rec	ommenda Count FR
							A 14-10-201 ISS DATE Designed By:	PN: 8	D517.
							SCALE	Gene	Compo eral linear erances:
							SOURIAL	J WWW.SOU	± RIAU.(
		1				7	FORMAT A3	80	JRIAU 517J0
	Н		G	l F	E	$\bigvee$	D	C	

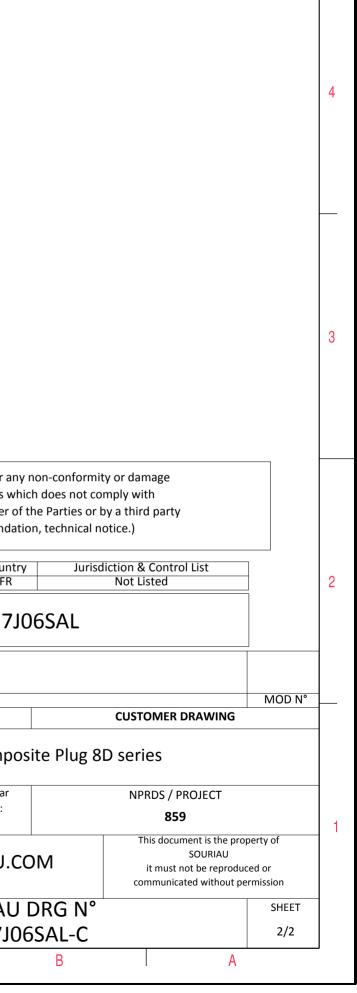

 $\triangleright$ 

σ