

Technical Data Sheet

PEWAN112-10SF

Features

• 7.05 GHz to 10 GHz

Laboratory Use

• WR-112 Waveguide Band

Applications

- Antenna MeasurementsWireless Communication
- Microwave Radio Systems
 - Radome Testing
 - Automotive Antenna Test

Solutions

- Radar Cross Section
- Satellite Antenna Testing

Description

The PEWAN112-10SF standard gain horn antenna (also known as waveguide horn) from Pasternack is part of our comprehensive selection of waveguide antennas. This standard gain horn is mated with a WR-112 to SMA Female waveguide to coaxial adapter and operates from 7.05 GHz to 10 GHz.

Our PEWAN112-10SF standard gain horn antenna has a nominal gain of 10 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 52.1 dB and 51.6 dB respectively. Pasternack's SMA Female to WR-112 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the PEWAN112-10SF are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-112 waveguide antennas with SMA Female interface is part of over 40,000 RF, microwave and millimeter wave components from Pasternack available worldwide and Ship same day.

Configuration

Design Coaxial Interface WR-112 Standard Gain Horn SMA Female

10 dBi Nominal Gain

SMA Female Connector

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.05		10	GHz
Waveguide Standard Gain Horn				
Gain		10		dBi
Horizontal Half Power Beam Widt	h	52.1		Degrees
Vertical Half Power Beam Width		51.6		Degrees

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN112-10SF







PEWAN112-10SF

Mechanical Specifications Size					
Length Width Height	3.502 in [88.95 mm] 1.705 in [43.31 mm] 1.369 in [34.77 mm]				
Weight	0.423 lbs [191.87 g]				
RF Connector Type	SMA Female				
Waveguide Interface Waveguide Size	WR-112				
Environmental Specifications					
Compliance Certifications (see product page for current document)					
Plotted and Other Data Notes:					


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN112-10SF







PEWAN112-10SF

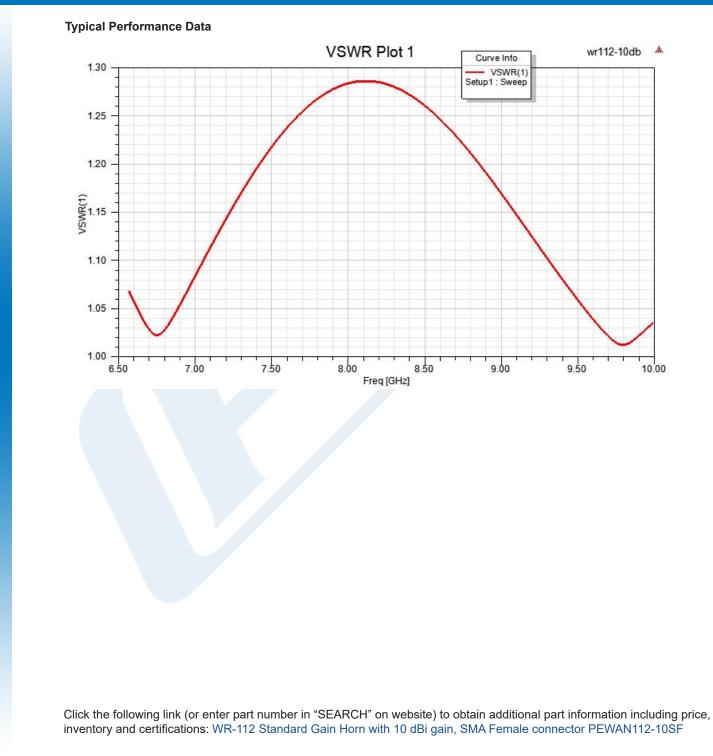






Technical Data Sheet

PEWAN112-10SF

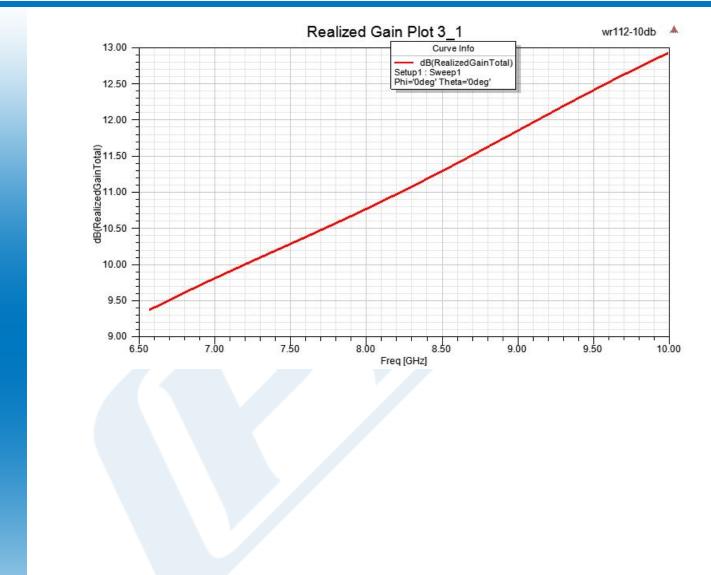


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN112-10SF





Technical Data Sheet

PEWAN112-10SF

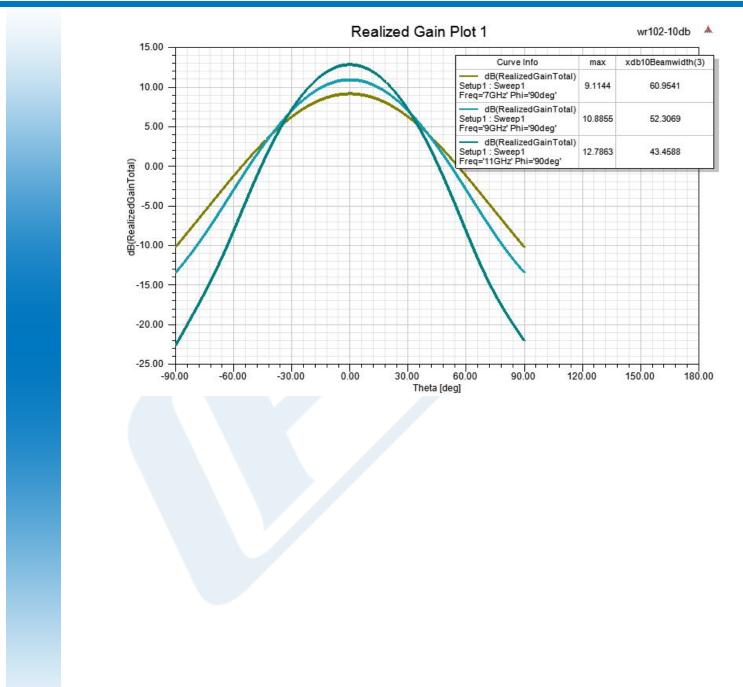


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN112-10SF





Technical Data Sheet

PEWAN112-10SF

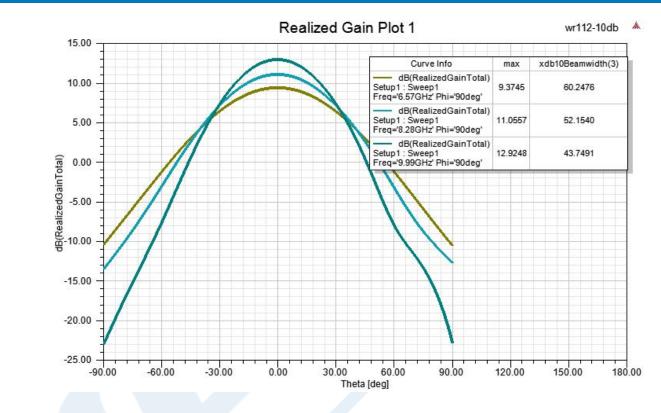

WR-112 Standard Gain Horn with 10 dBi gain, SMA Female connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN112-10SF

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWAN112-10SF CAD Drawing WR-112 Standard Gain Horn with 10 dBi gain, SMA Female connector

