TECHNICAL DATA SHEET



Series: 5BAR

Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx



Features:

- 380-520/698-960/1710-2700/
 3300-3700/4900-6000MHz
- · Ceiling mount omni SiSo
- Color RAL9016
- Vertical polarization
- IP67
- Diam 288mm, Height 136mm

Applications:

- Public safety
- TETRA
- DAS LTE
- WiFi

All dimensions are in mm / inches

Issue: 1712

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

This document covers all product variants of the following product family:

Item	Part Number	Description
1	PSDAS4310F	Omni-Directional In-Building Antenna, 380-520/698-2700/3300-3700/4900-6000MHz, with 4.3/10-female connector and 360mm cable. NO PIM requirement.
2	PSDAS4310FP	Omni-Directional In-Building Antenna, 380-520/698-2700/3300-3700/4900-6000MHz, with 4.3/10-female connector and 360mm cable. PIM: -150dBc@2*20W
3	PSDASNF	Omni-Directional In-Building Antenna, 380-520/698-2700/3300-3700/4900-6000MHz, with N-female connector and 360mm cable. NO PIM requirement.
4	PSDASNFP	Omni-Directional In-Building Antenna, 380-520/698-2700/3300-3700/4900-6000MHz, with N-female connector and 360mm cable. PIM: -150dBc@2*20W

TECHNICAL DATA SHEET



Series: 5BAR

Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

ELECTRICAL SPECIFICATIONS

Frequency	380-520/698-2700/3300-3700/4900-6000MHz		
Nominal Impedance	50	Ω	
VSWR(380-520MHz)	2.5:1		
VSWR(698-2700/3300-3700/4900-6	6000MHz) 2.0:1		
Average Efficiency(380-520MHz)	77	%	
Average Efficiency(698-960MHz)	87	%	
Average Efficiency(1710-2700MHz)	85	%	
Average Efficiency(3300-3700MHz)	89	%	
Average Efficiency(4900-6000MHz)	87	%	
Peak Gain (380-520MHz)	3.6	dBi +/- 1 dB	
Peak Gain (698-960MHz)	3.4	dBi +/- 1 dB	
Peak Gain (1710-2700MHz)	7.1	dBi +/- 1 dB	
Peak Gain (3300-3700MHz)	6.1	dBi +/- 1 dB	
Peak Gain (4900-6000MHz)	5.8	dBi +/- 1 dB	
Polarization:	linear		



TECHNICAL DATA SHEET

Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

Series: 5BAR

MECHANICAL SPECIFICATIONS

Plastic radome ABS, UV resistant

Color RAL9016

Ingress Protection IP67

Weight 0.93kg

Size Diam 288 x Height 136mm

Cable length 360mm

Connector type N-female or 4.3/10-female

Flammability rating UL94-V0

Mounting type Ceiling mount

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+60 ° C








Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

MECHANICAL DRAWING

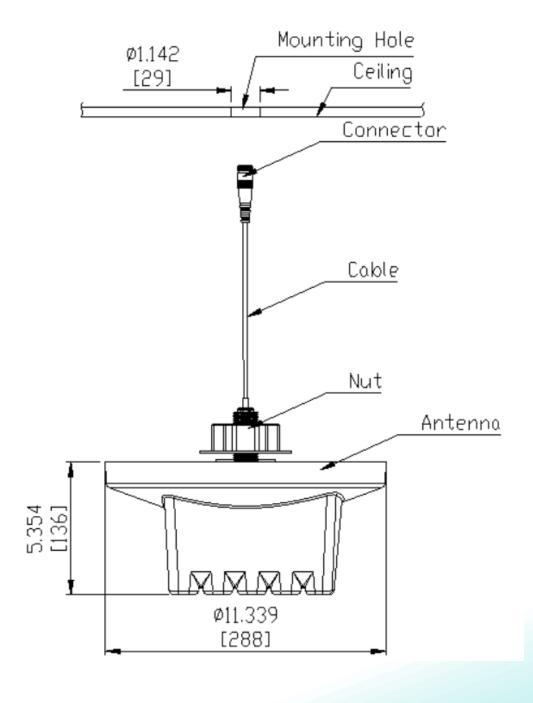









Description:


Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

CHARTS

VSWR

VSWR vs Frequency measured in free space

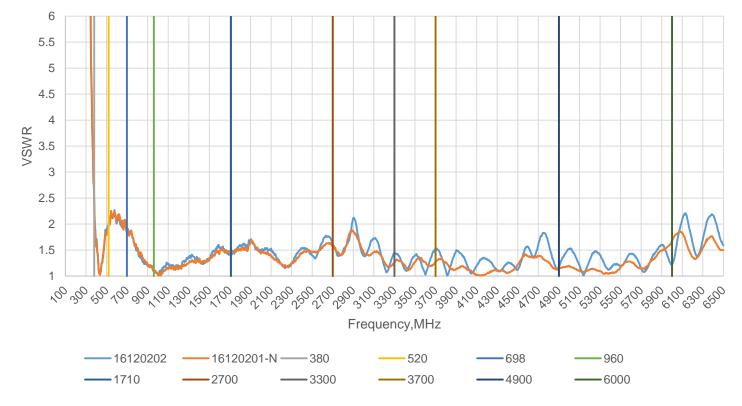





Description:


Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

CHARTS

Efficiency

Efficiency vs Frequency measured in free space

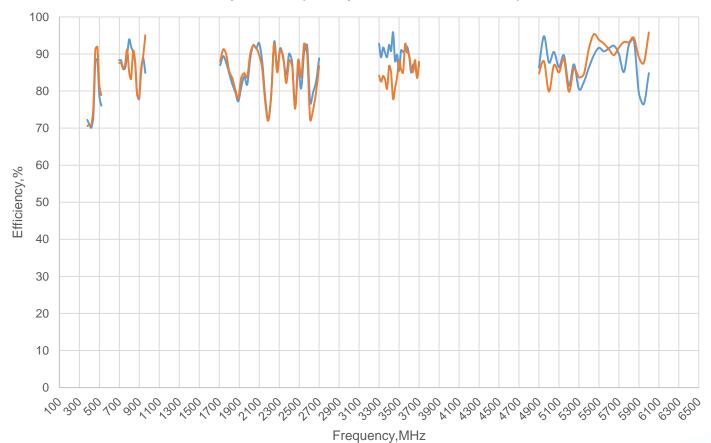

—___16120201-N _____16120202







Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

CHARTS

Peak Gain

Peak Gain vs Frequency measured in free space



-1612020-N ——16120201








Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

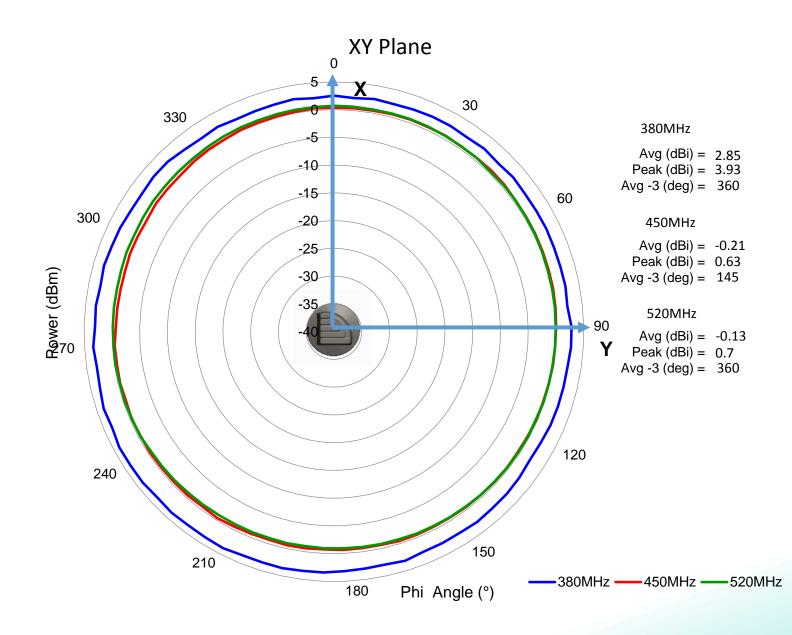






Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

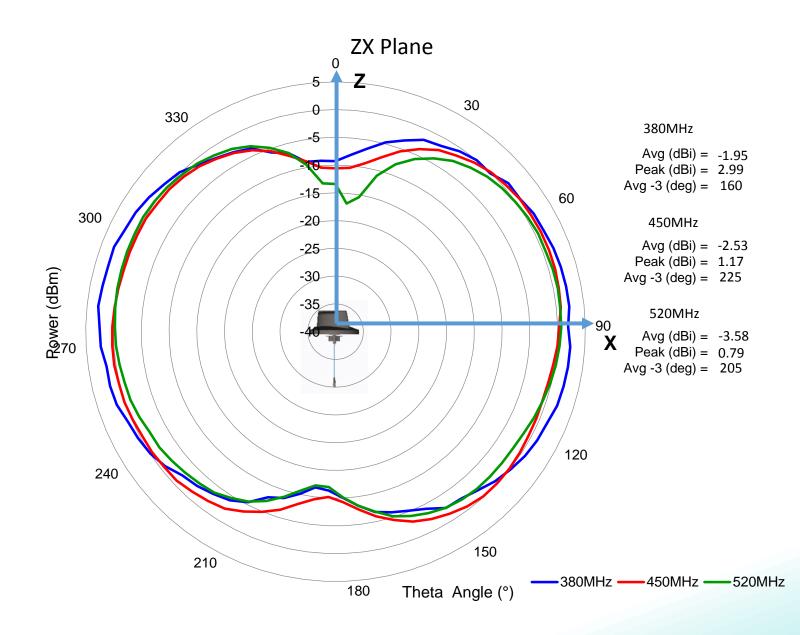






Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

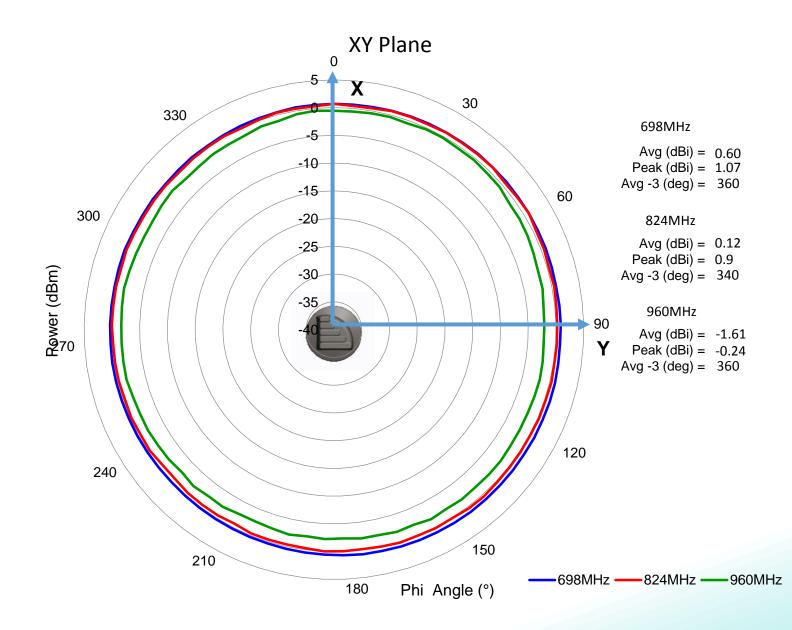






Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

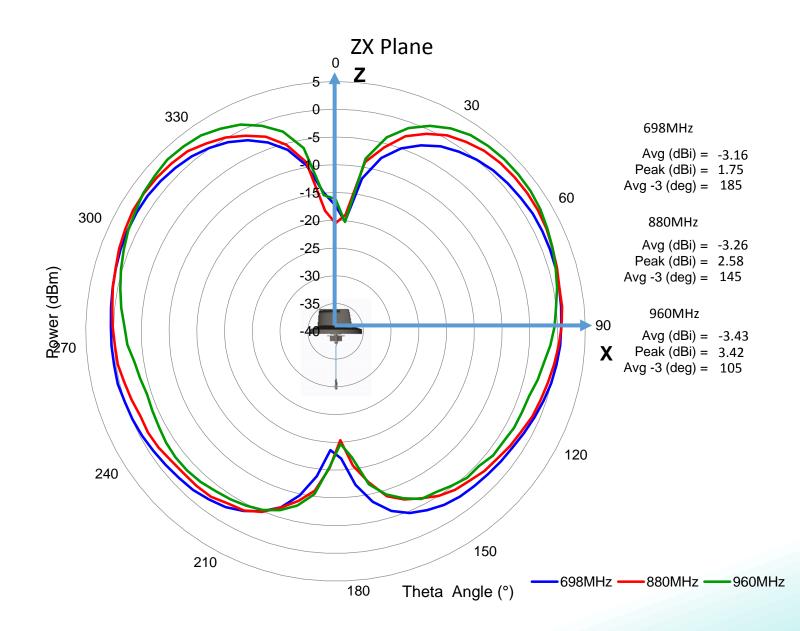






Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

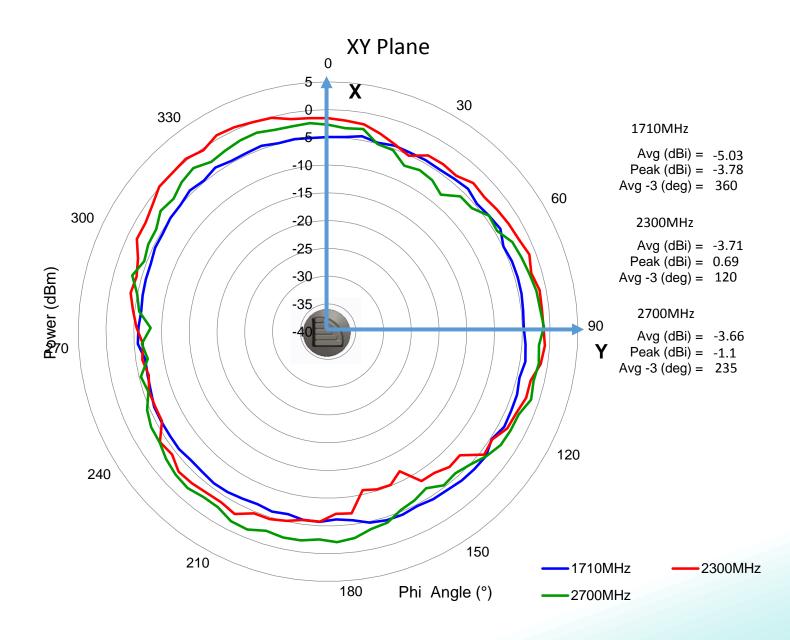








Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

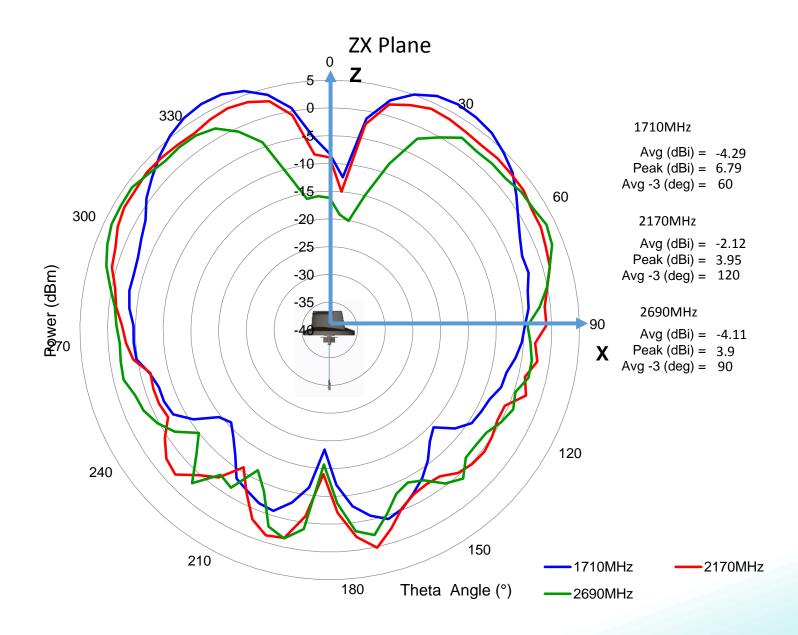






Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

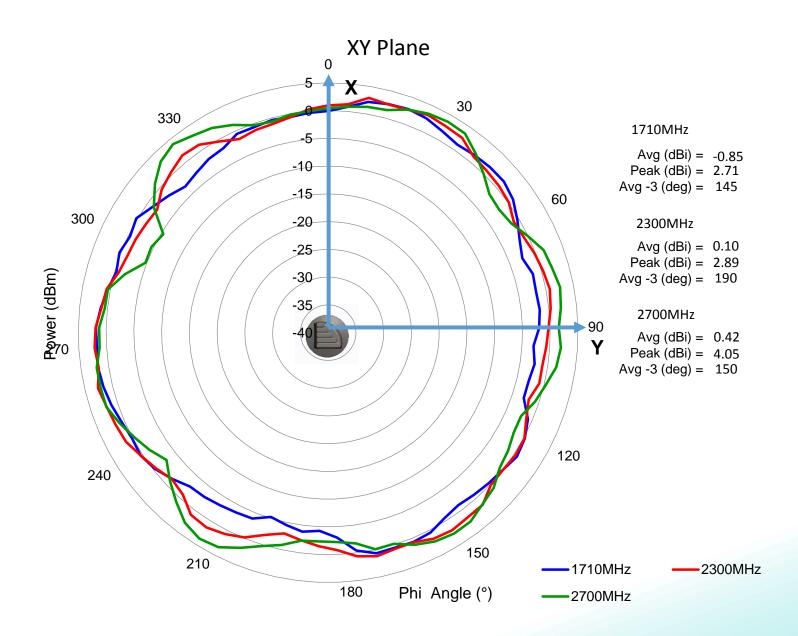








Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

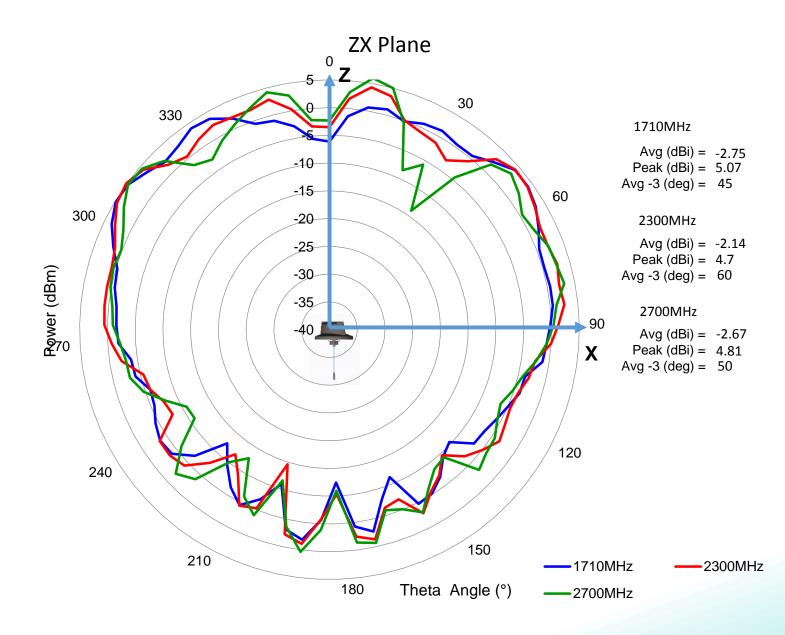






Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

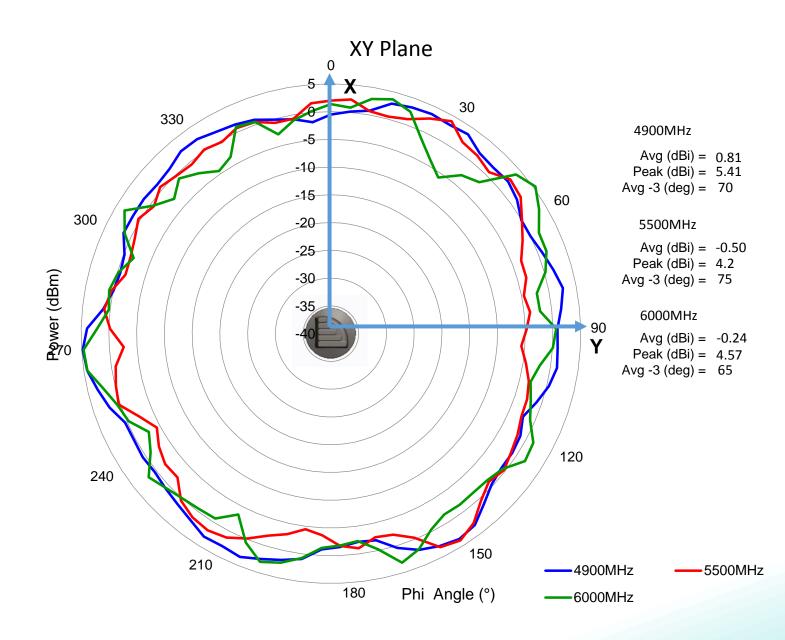






Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

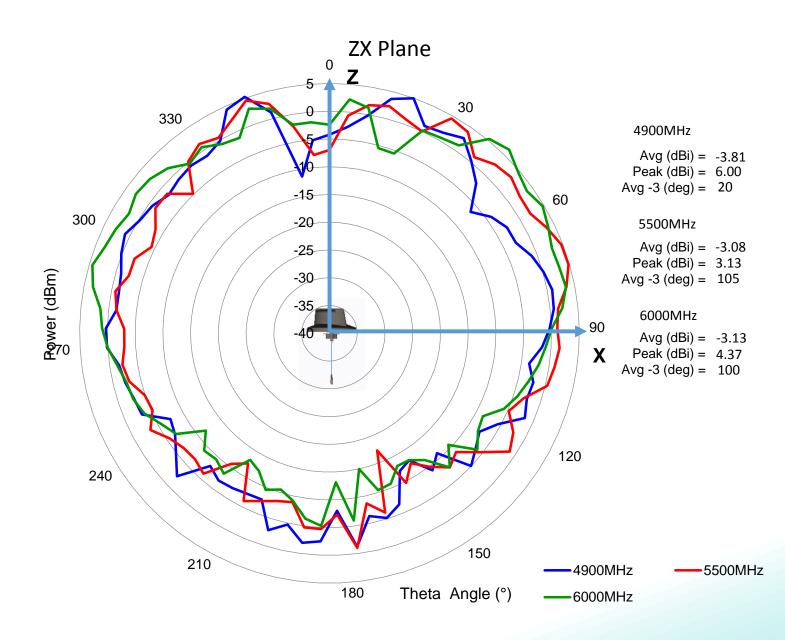





Description:

Omni-Directional Public Safety/DAS Antenna 380-520/698-2700/3300-3700/4900-6000MHz

PART NUMBER: PSDASxx

PACKAGING

Pack 1 Antenna in 1 Small Box, 4 Small Box pack into 1 Master Box