

DATA SHEET

CURRENT SENSOR - LOW TCR

AUTOMOTIVE GRADE

PA series

5%, 1%, 0.5%

sizes 0100/0201/0402/0603/0805/1206/2010/2512

RoHS compliant & Halogen free



SCOPE

This specification describes PA0100 to 2512 series current sensor - low TCR with metal substrate.

APPLICATIONS

- Smart Phone
- Batteries
- Computer
- Telecom / Datacom
- Industrial / Power supply
- Car electronics

FEATURES

- AEC-Q200 qualified
- Halogen-free Epoxy
- Total lead free without RoHS exemption
- RoHS compliant
- Reduce environmentally hazardous wastes
- High component and equipment reliability
- Non-forbidden materials used in products/production
- Low resistances applied to current sensing
- Moisture sensitivity level: MSL 1

ORDERING INFORMATION - GLOBAL PART NUMBER

Global part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

GLOBAL PART NUMBER

PA XXXX X X X XX XXXX X
 (1) (2) (3) (4) (5) (6) (7)

(1) SIZE

0100/0201/0402/0603/0805/1206/2010/2512

(2) TOLERANCE

D = ±0.5%
 F = ±1%
 J = ±5%

(3) PACKAGING TYPE

R = Paper taping reel (PA0100~PA1206)
 K = Embossed taping reel (PA2010/PA2512)

(4) TEMPERATURE COEFFICIENT OF RESISTANCE

E = ± 50ppm/°C
 M = ± 75ppm/°C
 F = ± 100ppm/°C
 L = ± 150ppm/°C
 G = ± 200ppm/°C
 I = ± 300ppm/°C

(5) TAPING REEL

07 / 7W / 7T / 47 / 57 / 87 / 0L / WL / 4L inch dia. Reel and specific rated power Detailed power rating are shown in the Table 2.

(6) RESISTANCE VALUE

0.5 mΩ to 20 mΩ

(7) DEFAULT CODE

Letter L / Z is the system default code for ordering only. ^(Note)
 L is for 0100/0201/0402/0603/0805
 Z is for only 1206/2010/2512

| Resistance code rule | Example |
|----------------------|----------------------------|
| 0UX | 0U5=0.0005Ω |
| 0RXXX | 0R001 = 1mΩ 0R02 = 20mΩ |

ORDERING EXAMPLE

The ordering code for a PA0805 0.125W chip resistor,TC50 value 0.01Ω (10mR) with ±1% tolerance, supplied in 7-inch tape reel with 5Kpcs quantify is: PA0805FRE070R01L.

NOTE

I. All our RChip products are RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead-Free Process"


MARKING

PA0100/0201/0402/0603/0805/1206/2010




No Marking

PA2512



4 digits
The "m" is used as decimal point; the other 3 digits are significant and the unit is milliohm
PA2512: 0.5mΩ and 0.75mΩ




4 digits
The "R" is used as a decimal point; the other 3 digits are significant
PA2512: 1mΩ to 20mΩ

CONSTRUCTION

The resistors are constructed by using outstanding TCR level materials, which make Yageo PA resistors excellent for current sensing application in battery charger circuit & DC-DC converter. The advanced resistive materials are adopted to get the precisely required resistance. Finally, the three materials of external terminations (Cu / Ni / matte Tin) are added, as shown in Fig. 5.

Outlines

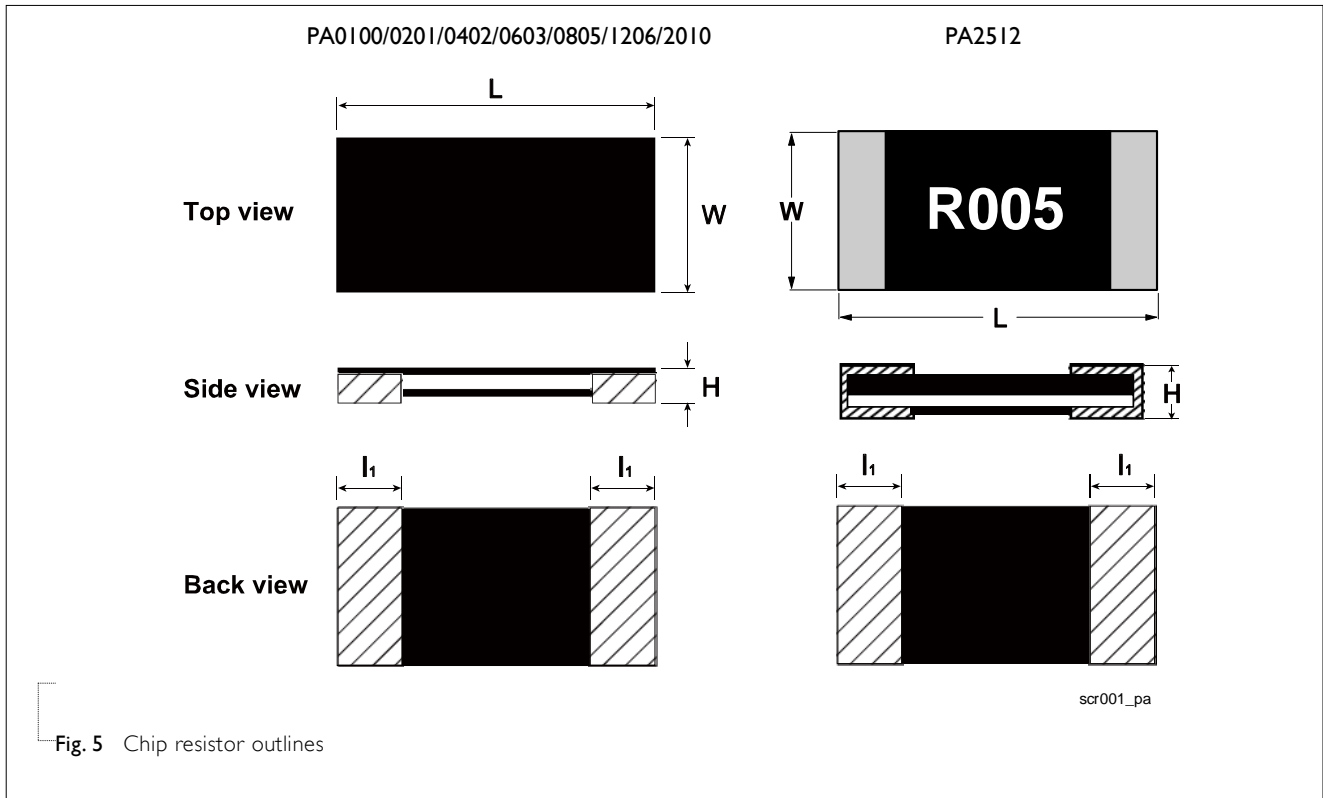

DIMENSION

Table I For outlines, please refer to Fig. 5

| TYPE | RESISTANCE RANGE | L (mm) | W (mm) | H (mm) | II (mm) |
|----------------------|--|-----------------|-----------------|-----------------|-----------------|
| PA0100 | $10\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 0.40 ± 0.03 | 0.20 ± 0.03 | Max. 0.15 | 0.10 ± 0.03 |
| PA0201 | $5\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 0.60 ± 0.03 | 0.31 ± 0.04 | Max. 0.30 | 0.15 ± 0.06 |
| PA0402 | $2\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 1.00 ± 0.10 | 0.55 ± 0.10 | Max. 0.40 | 0.25 ± 0.10 |
| PA0603 | $1\text{m}\Omega$ | 1.60 ± 0.20 | 0.80 ± 0.20 | 0.55 ± 0.15 | 0.38 ± 0.12 |
| | $2\text{m}\Omega$ | 1.60 ± 0.20 | 0.80 ± 0.20 | 0.45 ± 0.15 | 0.38 ± 0.12 |
| | $2.5\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 1.60 ± 0.20 | 0.80 ± 0.20 | 0.30 ± 0.15 | 0.38 ± 0.12 |
| PA0805 | $1\text{m}\Omega$ | 2.03 ± 0.20 | 1.27 ± 0.20 | 0.55 ± 0.15 | 0.60 ± 0.15 |
| | $1.5/ 2\text{m}\Omega$ | 2.03 ± 0.20 | 1.27 ± 0.20 | 0.45 ± 0.15 | 0.50 ± 0.15 |
| | $2.5\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 2.03 ± 0.20 | 1.27 ± 0.20 | 0.30 ± 0.15 | 0.35 ± 0.20 |
| PA1206 (0L/WL/4L) | $1\text{m}\Omega$ | 3.20 ± 0.25 | 1.60 ± 0.25 | 0.50 ± 0.10 | 1.04 ± 0.25 |
| | $2\text{m}\Omega$ | 3.20 ± 0.25 | 1.60 ± 0.25 | 0.45 ± 0.10 | 1.04 ± 0.25 |
| PA1206 (07/7W/47) | $1\text{m}\Omega$ | 3.20 ± 0.25 | 1.60 ± 0.25 | 0.65 ± 0.25 | 0.51 ± 0.25 |
| | $2\text{m}\Omega$ | 3.20 ± 0.25 | 1.60 ± 0.25 | 0.55 ± 0.25 | 0.60 ± 0.25 |
| | $2.5/ 3\text{m}\Omega$ | 3.20 ± 0.25 | 1.60 ± 0.25 | 0.40 ± 0.25 | 0.80 ± 0.30 |
| | $4\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 3.20 ± 0.25 | 1.60 ± 0.25 | 0.40 ± 0.25 | 0.60 ± 0.30 |
| PA2010 | $1\text{m}\Omega \leq R \leq 3\text{m}\Omega$ | 5.08 ± 0.25 | 2.54 ± 0.25 | 0.50 ± 0.25 | 1.40 ± 0.25 |
| | $4\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 5.08 ± 0.25 | 2.54 ± 0.25 | 0.40 ± 0.25 | 0.70 ± 0.25 |
| PA2512 | $0.5\text{m}\Omega \leq R \leq 0.75\text{m}\Omega$ | 6.35 ± 0.25 | 3.18 ± 0.25 | 0.40 ± 0.25 | 2.72 ± 0.25 |
| | $1\text{m}\Omega \leq R \leq 4\text{m}\Omega$ | 6.35 ± 0.25 | 3.18 ± 0.25 | 0.40 ± 0.25 | 2.21 ± 0.25 |
| | $5\text{m}\Omega \leq R \leq 6\text{m}\Omega$ | 6.35 ± 0.25 | 3.18 ± 0.25 | 0.40 ± 0.25 | 1.19 ± 0.25 |
| | $7\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 6.35 ± 0.25 | 3.18 ± 0.25 | 0.40 ± 0.25 | 0.76 ± 0.25 |

Note:

1. For relevant physical dimensions, please refer to construction outlines.
2. Please contact with sales offices, distributors and representatives in your region before ordering.

ELECTRICAL CHARACTERISTICS

Table 2

| SIZE | POWER RATING ⁽⁴⁾ @ 70°C | | | | | | TOLERANCE ⁽²⁾ | RESISTANCE RANGE | TEMPERATURE COEFFICIENT OF RESISTANCE ⁽³⁾ |
|--------------------|------------------------------------|-------------------------|-------|-------------------------|------|----|--------------------------|---|---|
| | 07 0L ⁽⁵⁾ | 7W WL ⁽⁵⁾ | 7T | 47 4L ⁽⁵⁾ | 57 | 87 | | | |
| 0100 | 1/32W | 1/16W | -- | -- | -- | -- | ±1%(F) ±5%(J) | 10mΩ ≤ R ≤ 20mΩ | ±300 ppm/°C(I) |
| 0201 | 1/20W | 1/10W | 3/20W | 1/4W | -- | -- | ±0.5%(D) | 20mΩ | ±150 ppm/°C(L) |
| | | | | | | | ±1%(F) ±5%(J) | 5mΩ ≤ R ≤ 20mΩ | |
| 0402 | 1/16W | 1/8W | 1/6W | 1/4W | 1/3W | -- | ±0.5%(D) | 15mΩ ≤ R ≤ 20mΩ | ±150 ppm/°C(L) |
| | | | | | | | ±1%(F) ±5%(J) | 2mΩ ≤ R ≤ 20mΩ | |
| 0603 | 1/10W | 1/5W | 1/3W | 2/5W | 1/2W | -- | ±0.5%(D) | 10mΩ ≤ R ≤ 20mΩ | 1mΩ ±200 ppm/°C(G) 2/2.5mΩ ±150 ppm/°C(L) 3mΩ ≤ R ≤ 20mΩ ±50 ppm/°C(E), ±75 ppm/°C(M) |
| | | | | | | | ±1%(F) ±5%(J) | 1mΩ ≤ R ≤ 20mΩ | |
| 0805 | 1/8W | 1/4W | -- | 1/2W | -- | 1W | ±0.5%(D) | 10mΩ ≤ R ≤ 20mΩ | 1/1.5mΩ ±150 ppm/°C(L) 2mΩ ≤ R ≤ 20mΩ ±50 ppm/°C(E) |
| | | | | | | | ±1%(F) ±5%(J) | 1mΩ ≤ R ≤ 20mΩ | |
| 1206 (0L/WL/4L) | 1/4W | 1/2W | -- | 1W | -- | -- | ±1%(F) ±5%(J) | 1m / 2mΩ | ±50 ppm/°C(E) |
| 1206 (07/7W/47) | 1/4W | 1/2W | -- | 1W | -- | -- | ±0.5%(D) | 5mΩ ≤ R ≤ 20mΩ | 1/2mΩ ±100 ppm/°C(F) 3mΩ ≤ R ≤ 20mΩ ±50 ppm/°C(E) |
| | | | | | | | ±1%(F) ±5%(J) | 1mΩ ≤ R ≤ 20mΩ | |
| 2010 | 1/2W | 1W | 3/2W | 2W | -- | -- | ±0.5%(D) | 5mΩ ≤ R ≤ 20mΩ (2W: 5mΩ ≤ R ≤ 10mΩ) | ±50 ppm/°C(E) |
| | | | | | | | ±1%(F) ±5%(J) | 1mΩ ≤ R ≤ 20mΩ (2W: 1mΩ ≤ R ≤ 10mΩ) | |
| 2512 | 1W | 2W | -- | -- | -- | -- | ±0.5%(D) | (1W: 0.5mΩ ≤ R ≤ 20mΩ) (2W: 0.5mΩ ≤ R ≤ 5mΩ) | 1mΩ ≤ R ≤ 20mΩ ±50 ppm/°C(E) 0.5mΩ ≤ R ≤ 0.75mΩ ±75 ppm/°C(M) |
| | | | | | | | ±1%(F) ±5%(J) | | |

Note: 1. Please contact with sales offices, distributors and representatives in your region before ordering.

2. Global part number (code7)
3. Global part number (code9)
4. Global part number (code10-11)
5. 0L/WL/4L are only for PA1206 1m/2mΩ

FUNCTIONAL DESCRIPTION

OPERATING TEMPERATURE RANGE

PA0100 to PA0402 Range: -55°C to +125°C

PA0603/ 0805 Range: -55°C to +155°C

PA1206/ 2010/ 2512 Range: -55°C to +170°C

POWER RATING

Standard rated power at 70°C: For detail power value, please refer to Table 2.

RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:


$$V = \sqrt{(P \times R)}$$

Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

R = Resistance value (Ω)

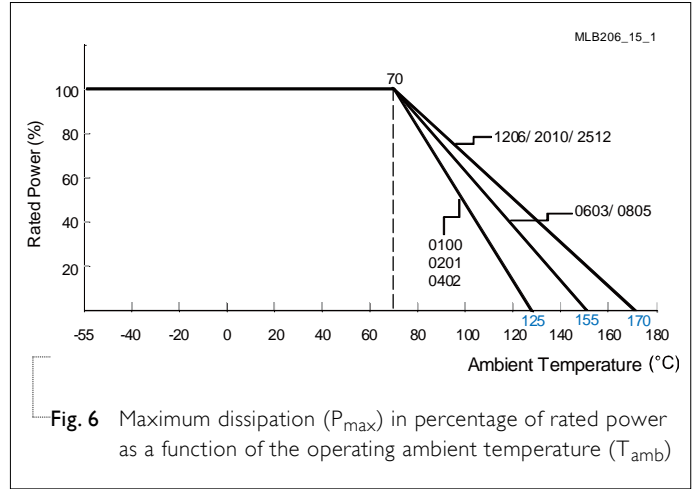


PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

| PACKING STYLE | REEL DIMENSION | PA0100 | PA0201 | PA0402 | PA0603 | PA0805 | PA1206 | PA2010 | PA2512 |
|--------------------------|----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Paper Taping Reel (R) | 7" (178 mm) | 20,000 | 10,000 | 10,000 | 5,000 | 5,000 | 4,000 | - | - |
| Embossed Taping Reel (K) | 7" (178 mm) | - | - | - | - | - | - | 4,000 | 4,000 |

PAPER TAPE

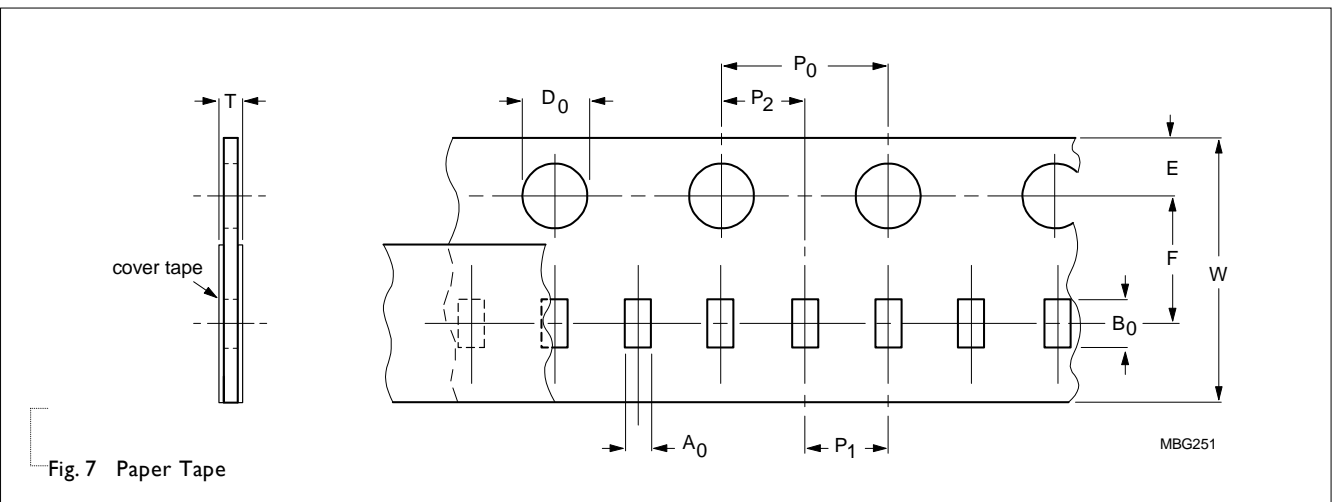

EMBOSSED TAPE

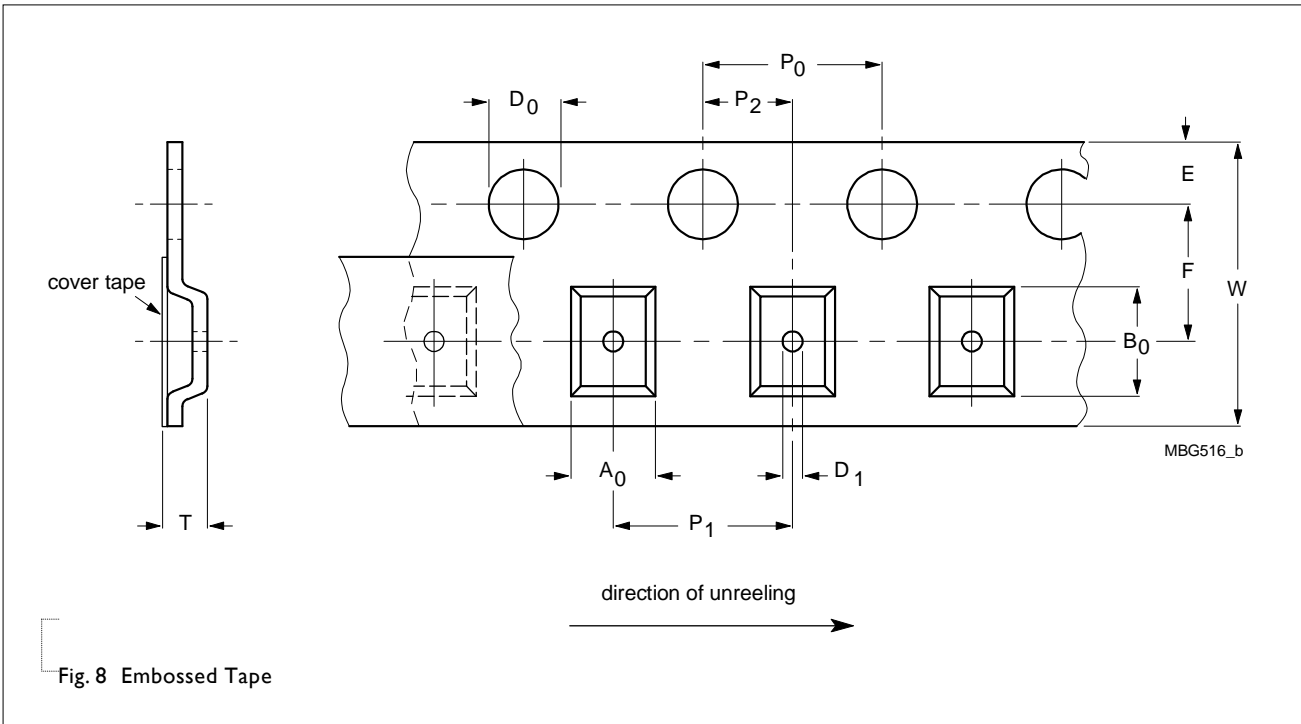


Fig. 8 Embossed Tape

Table 4 Dimensions of paper tape for relevant chip resistors size

| SIZE | SYMBOL | | | | | | | | | | Unit: mm |
|--------|----------------|----------------|-----------|-----------|-----------|----------------|----------------|----------------|-----------------|--------------------------|----------|
| | A ₀ | B ₀ | W | E | F | P ₀ | P ₁ | P ₂ | ΦD ₀ | T | |
| PA0100 | 0.24±0.03 | 0.45±0.03 | 8.00±0.20 | 1.75±0.10 | 3.50±0.05 | 4.00±0.05 | 2.00±0.10 | 2.00±0.05 | 1.50±0.10 | 0.31±0.10 | |
| PA0201 | 0.39±0.10 | 0.70±0.10 | 8.00±0.30 | 1.75±0.10 | 3.50±0.10 | 4.00±0.10 | 2.00±0.10 | 2.00±0.10 | 1.55±0.05 | 0.43±0.10 | |
| PA0402 | 0.59±0.10 | 1.10±0.10 | 8.00±0.30 | 1.75±0.10 | 3.50±0.10 | 4.00±0.10 | 2.00±0.10 | 2.00±0.10 | 1.55±0.05 | 0.53±0.10 | |
| PA0603 | 1.08±0.10 | 1.90±0.10 | 8.00±0.30 | 1.75±0.10 | 3.50±0.10 | 4.00±0.10 | 4.00±0.10 | 2.00±0.10 | 1.55±0.05 | 0.60±0.10 | |
| PA0805 | 1.60±0.10 | 2.35±0.10 | 8.00±0.30 | 1.75±0.10 | 3.50±0.10 | 4.00±0.10 | 4.00±0.10 | 2.00±0.10 | 1.55±0.05 | 0.60±0.10 ⁽¹⁾ | |
| | 1.60±0.10 | 2.35±0.10 | 8.00±0.30 | 1.75±0.10 | 3.50±0.10 | 4.00±0.10 | 4.00±0.10 | 2.00±0.10 | 1.55±0.05 | 0.53±0.10 ⁽²⁾ | |
| PA1206 | 1.90±0.10 | 3.50±0.10 | 8.00±0.30 | 1.75±0.10 | 3.50±0.10 | 4.00±0.10 | 4.00±0.10 | 2.00±0.10 | 1.55±0.05 | 0.85±0.15 | |

Note: 1. $1\text{m}\Omega \leq R \leq 2\text{m}\Omega$ ($T = 0.60 \pm 0.10\text{mm}$)
 2. $2.5\text{m}\Omega \leq R \leq 20\text{m}\Omega$ ($T = 0.53 \pm 0.10\text{mm}$)

Table 5 Dimensions of embossed tape for relevant chip resistors size

| SIZE | SYMBOL | | | | | | | | | | Unit: mm |
|--------|----------------|----------------|-----------|-----------|-----------|----------------|----------------|----------------|-----------------|-----------|----------|
| | A ₀ | B ₀ | W | E | F | P ₀ | P ₁ | P ₂ | ΦD ₀ | T | |
| PA2010 | 3.40±0.15 | 6.70±0.15 | 12.0±0.30 | 1.75±0.10 | 5.50±0.10 | 4.00±0.10 | 4.00±0.10 | 2.00±0.10 | 1.55±0.10 | 0.85±0.15 | |
| PA2512 | 3.40±0.15 | 6.70±0.15 | 12.0±0.30 | 1.75±0.10 | 5.50±0.10 | 4.00±0.10 | 4.00±0.10 | 2.00±0.10 | 1.55±0.10 | 0.80±0.15 | |

REEL SPECIFICATION


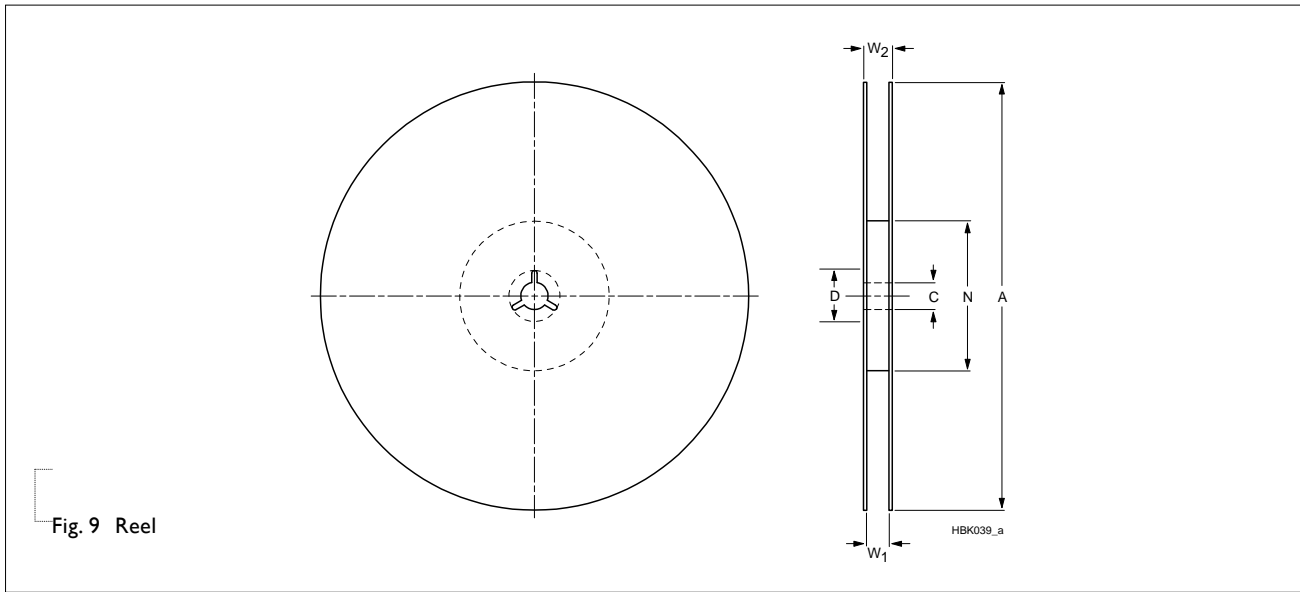


Table 6 Dimensions of reel specification for relevant chip resistors size

| SIZE | QUANTITY PER REEL | REEL SIZE | | SYMBOL | | | | |
|--------|-------------------|----------------|----------------|--------------|-----------|-----------|----------|----------------|
| | | 8mm TAPE WIDE | 12mm TAPE WIDE | A | N | C | D | W ₁ |
| PA0100 | 20,000 | 7" (Φ178mm) | - | 180.0+0/-3.0 | 60.0+1/-0 | 13.00±0.2 | 21.0±0.8 | 9.0±0.3 |
| PA0201 | 10,000 | 7" (Φ178mm) | - | 178.0±1.0 | 60.0+1/-0 | 13.50±0.5 | 21.0±0.8 | 9.0±0.5 |
| PA0402 | 10,000 | 7" (Φ178mm) | - | 178.0±1.0 | 60.0+1/-0 | 13.50±0.5 | 21.0±0.8 | 9.0±0.5 |
| PA0603 | 5,000 | 7" (Φ178mm) | - | 178.0±1.0 | 60.0+1/-0 | 13.50±0.5 | 21.0±0.8 | 9.0±0.5 |
| PA0805 | 5,000 | 7" (Φ178mm) | - | 178.0±1.0 | 60.0+1/-0 | 13.50±0.5 | 21.0±0.8 | 9.0±0.5 |
| PA1206 | 4,000 | 7" (Φ178mm) | - | 178.0±1.0 | 60.0+1/-0 | 13.50±0.5 | 21.0±0.8 | 9.0±0.5 |
| PA2010 | 4,000 | - | 7" (Φ178mm) | 178.0±1.0 | 60.0+1/-0 | 13.50±0.5 | 21.0±0.8 | 13.6±0.5 |
| PA2512 | 4,000 | - | 7" (Φ178mm) | 178.0±1.0 | 60.0+1/-0 | 13.50±0.5 | 21.0±0.8 | 13.6±0.5 |

LEADER/TRAILER TAPE SPECIFICATION

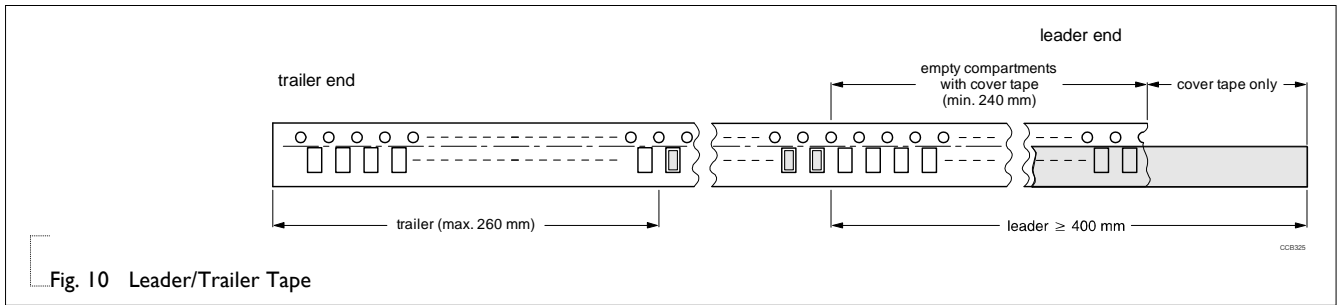

FOOTPRINT AND SOLDERING PROFILES

For recommended soldering profiles, please refer to data sheet “Chip resistors mounting”.

FOOTPRINT

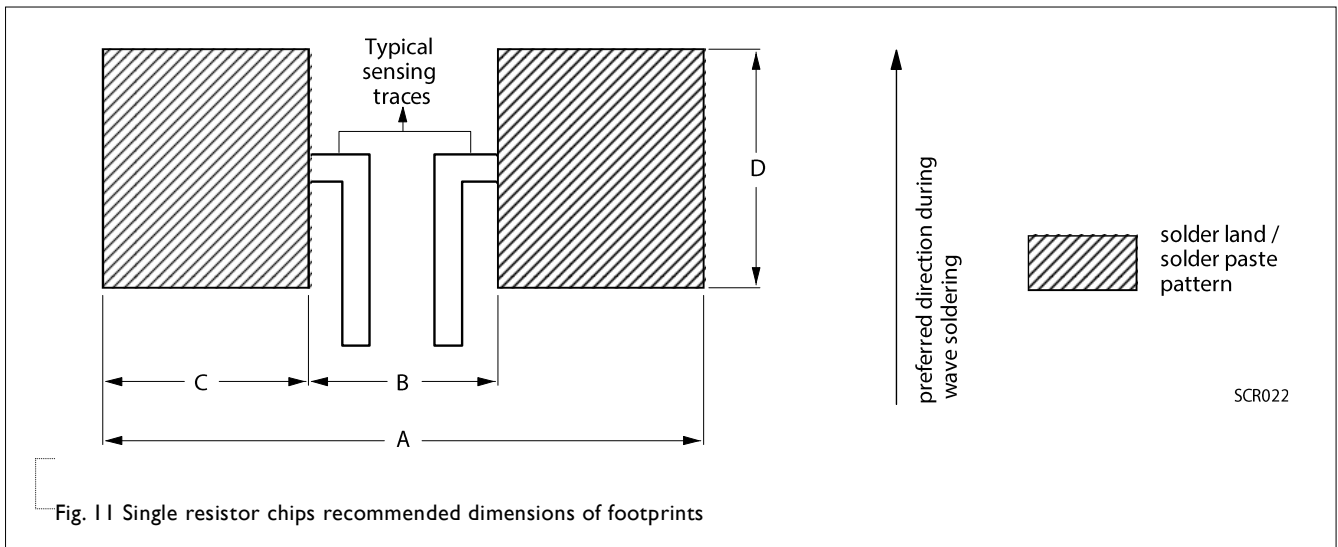


Table 7 Footprint dimensions

Unit: mm

| TYPE | RESISTANCE RANGE | A | B | C | D |
|----------------------|------------------|---------|----------|----------|---------|
| PA0100 | 10mΩ ≤ R ≤ 20mΩ | 0.5~0.8 | 0.16~0.2 | 0.17~0.3 | 0.2~0.4 |
| PA0201 | 5mΩ ≤ R ≤ 20mΩ | 1.00 | 0.30 | 0.35 | 0.40 |
| PA0402 | 2mΩ ≤ R ≤ 20mΩ | 2.00 | 0.40 | 0.80 | 0.60 |
| PA0603 | 1mΩ | 2.20 | 0.80 | 0.70 | 0.90 |
| | 1mΩ < R ≤ 20mΩ | 2.20 | 0.80 | 0.70 | 0.90 |
| PA0805 | 1mΩ | 4.10 | 0.50 | 1.80 | 1.44 |
| | 1.5mΩ ≤ R ≤ 20mΩ | 4.60 | 1.00 | 1.80 | 1.44 |
| PA1206 (0L/WL/4L) | 1mΩ / 2mΩ | 3.90 | 0.90 | 1.50 | 1.78 |
| | 1mΩ / 2mΩ | 4.20 | 1.00 | 1.60 | 1.84 |
| PA1206 (07/7W/47) | 2.5mΩ / 3mΩ | 4.80 | 1.00 | 1.90 | 1.84 |
| | 4mΩ ≤ R ≤ 20mΩ | 4.80 | 1.20 | 1.80 | 1.84 |
| PA2010 | 1mΩ ≤ R ≤ 3mΩ | 6.00 | 1.60 | 2.30 | 3.00 |
| | 4mΩ ≤ R ≤ 20mΩ | 6.00 | 3.50 | 1.25 | 3.00 |
| PA2512 | 0.5mΩ ≤ R ≤ 1mΩ | 7.36 | 0.50 | 3.43 | 3.68 |
| | 1mΩ ≤ R ≤ 4mΩ | 7.37 | 1.27 | 3.05 | 3.68 |
| | 5mΩ ≤ R ≤ 6mΩ | 7.40 | 3.18 | 2.11 | 3.68 |
| | 7mΩ ≤ R ≤ 20mΩ | 7.36 | 4.06 | 1.65 | 3.68 |

TESTS AND REQUIREMENTS

Table 8 Test condition, procedure and requirements

| TEST | TEST METHOD | PROCEDURE | REQUIREMENT |
|---|---|---|--|
| Short time overload | IEC60115-1 4.13 | 5 times of rated power for 5 seconds at room temperature | 0100 : $\pm(2.0\%+0.0005\Omega)$ 0201~2010 : $\pm(1.0\%+0.0005\Omega)$ 2512 : $\pm(0.5\%+0.0005\Omega)$ No visible damage |
| High Temperature Exposure/ Endurance at Upper Category Temperature | MIL-STD-202G-Method 108 | 1,000 hours at maximum operating temperature depending on specification, unpowered No direct impingement of forced air to the parts Tolerances: 0100/0201/0402: $125\pm 3^{\circ}\text{C}$ 0603/0805: $155\pm 3^{\circ}\text{C}$ 1206/2010/2512: $170\pm 3^{\circ}\text{C}$ | 0100 : $\pm(3.0\%+0.0005\Omega)$ Others : $\pm(1.0\%+0.0005\Omega)$ |
| Temperature Cycling | JESD22-A104 | 1,000 cycles, $-55/+125^{\circ}\text{C}$ for 1 cycle per hour | Others : $\pm(1.0\%+0.0005\Omega)$ 2512 : $\pm(0.5\%+0.0005\Omega)$ |
| Moisture Resistance | MIL-STD-202G-Method 106 | Each temperature / humidity cycle is defined at 8 hours (method 106F), 3 cycles / 24 hours for 10d with $25^{\circ}\text{C} / 65^{\circ}\text{C}$ 95% R.H, without steps 7a & 7b, unpowered | 0100 : $\pm(3.0\%+0.0005\Omega)$ Others : $\pm(0.5\%+0.0005\Omega)$ |
| Biased Humidity | MIL-STD-202 Method 103 | 1,000 hours; $85^{\circ}\text{C} / 85\% \text{RH}$ 10% of operating power | 0100 : $\pm(3.0\%+0.0005\Omega)$ 0201~2010 : $\pm(1.0\%+0.0005\Omega)$ 2512 : $\pm(0.5\%+0.0005\Omega)$ |
| Operational Life/ Endurance | MIL-STD-202G-Method 108 IEC 60115-1 4.25.1 | 1,000 hours at $125\pm 3^{\circ}\text{C}$, de-rated power applied for 1.5 hours on, 0.5 hour off, still-air required 1,000 hours at $70\pm 2^{\circ}\text{C}$ applied rated power 1.5 hours on, 0.5 hour off, still air required | 0100 : $\pm(3.0\%+0.0005\Omega)$ others : $\pm(1.0\%+0.0005\Omega)$ |
| Resistance to Solvents | MIL-STD-202 Method 215 | Immerse in isopropyl alcohol for 5 min with ultrasonic at room temperature | No visible damage |
| Mechanical Shock | MIL-STD-202 Method 213 | Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen. Peak value: 100 g's Duration: 6 ms Velocity change: 12.3 ft/s Waveform: Half sine | 0100 : $\pm(1.0\%+0.0005\Omega)$ Others : $\pm(0.5\%+0.0005\Omega)$ |
| Vibration | MIL-STD-202 Method 204 | 5 g's for 20 min., 12 cycles each of 3 orientations Test from 10-2000 Hz. | 0100 : $\pm(1.0\%+0.0005\Omega)$ Others : $\pm(0.5\%+0.0005\Omega)$ |
| Resistance to Soldering Heat | MIL-STD-202G-method 210 | Condition B, no pre-heat of samples Leadfree solder, 260°C , 10 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol | 0100 : $\pm(1.0\%+0.0005\Omega)$ Others : $\pm(0.5\%+0.0005\Omega)$ No visible damage |

| TEST | TEST METHOD | PROCEDURE | REQUIREMENT |
|--|------------------------|--|---|
| Thermal Shock | MIL-STD-202 Method 107 | -55/+125°C, Number of cycles is 300. Maximum transfer time is 20 seconds. Dwell time is 15 minutes. Air -Air | Others :±(1.0%+0.0005Ω) 2512 : ± (0.5%+0.0005Ω) No visible damage |
| Electrostatic Discharge | AEC-Q200-002 | Human Body Model, 1 pos + 1 neg. 0805/ 1206/ 2010/ 2512 : 2KV 0402/ 0603 : 1KV 0100/ 0201: 500V | ±(1.0%+0.0005Ω) No visible damage |
| Solderability - Wetting | J-STD-002 | 0201 to 2512 : (a) Method B, aging 4 hours at 155°C dry heat, dipping at 235±3°C for 5±0.5 seconds. (b) Method B, steam aging 8 hours, dipping at 215±3°C for 5±0.5 seconds. (c) Method D, steam aging 8 hours, dipping at 260±3 °C for 30±0.5 seconds. 0100 : 1st step: Method B, aging 4 hours at 155°C dry heat. 2nd step: Lead-free solder bath at 245±3°C, dipping at 245±3°C for 3±0.5 seconds | Well tinned (>95% covered) No visible damage |
| Flammability | UL94 | Try to inflame a specimen by a needle flame | No ignition of specimen;V-0 |
| Board Flex / Bending | AEC-Q200-005 | Chips mounted on a 90mm glass epoxy resin PCB (FR4), Bending for 0100: 5mm 0201: 3mm 0402 and above: 2mm Holding time: Min.60 seconds | ±(1.0%+0.0005Ω) |
| Terminal Strength (SMD) | AEC-Q200-006 | Applied 0100: 1N 0201: 3N 0402: 5N 0603/0805/1206/2010/2512: 17.7N for 60±1 seconds. | ±(1.0%+0.0005Ω) No visible damage |
| Flame Retardance | AEC-Q200-001 | Apply voltage to increase the surface temp to 350 °C | No flame, no explosion |
| Temperature Coefficient of Resistance (T.C.R.) | IEC 60115-1 4.8 | 0100~2010 at +25/+125 °C 2512 at +25/+150°C Formula: $T.C.R = \frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$ Where t1 =+25 °C or specified room temperature 0100~2010: t2 =+125 °C test temperature 2512 : t2 =+150°C test temperature R1=resistance at reference temperature in ohms R2=resistance at test temperature in ohms | Refer to table 2 |

REVISION HISTORY

| REVISION | DATE | CHANGE NOTIFICATION | DESCRIPTION |
|-----------|---------------|---------------------|---|
| Version 2 | Aug. 06, 2021 | - | - Add size of PA2512 and PA1206(0L/WL/4L) |
| Version 1 | Jun. 10, 2021 | - | - Add size of PA0100 and tol. $\pm 0.5\%$ for 0201/0402/0603/2010 |
| Version 0 | May. 07, 2020 | - | - New datasheet for automotive grade current sensor – PA0201/0402/0603/0805/1206/2010 series. |

LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.