




PART NO.

**RFB-1124-1P**


REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	04/17/06	JDMc
A	CHANGED DIE .213" TO .255"	JDM	10/31/07	JDMc
B	UPDATED CONN. DESIGN, DWG FORMAT & STRIPPING DIM.	CZS	02/29/08	JDMc

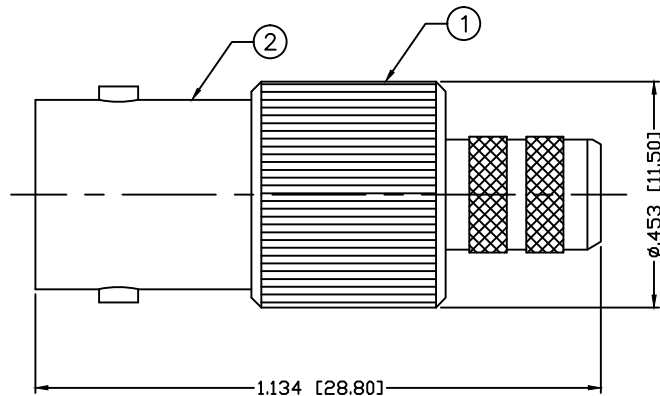

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .255"

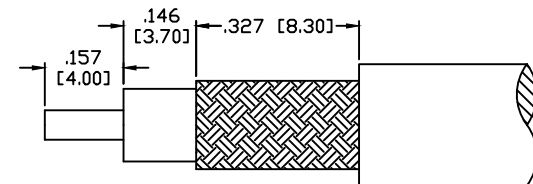

RECOMMENDED STRIPPING DIMENSIONS

## SPECIFICATIONS:

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-4 GHz  
 VSWR: 1.3 Max.  
 WORKING VOLTAGE: 500 V rms @ sea level  
 TEMPERATURE RANGE: -65°C TO 165°C  
 INSULATION RESISTANCE: 5k M Ohms min.  
 FOR ANTENNA SPECIALIST K214 & PRO-FLEX 800, TIMES AA3096 CABLE

#	DESCRIPTION	QTY	MATERIAL	FINISH
5	FERRULE	1	BRASS	NICKEL, 100μ <sup>sp</sup>
4	CONTACT	1	PHOSPHOR BRONZE	GOLD, 3μ <sup>sp</sup>
3	INSULATOR	1	PTFE	---
2	PRESS BODY	1	BRASS	NICKEL, 100μ <sup>sp</sup>
1	BODY	1	BRASS	NICKEL, 100μ <sup>sp</sup>

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]DRAWN  
C. ZUNIGA 02/29/08

CHECKED

ORJ DRAWN  
C. ZUNIGA 04/17/06**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS  
 INFORMATION PROPRIETARY TO  
 RF INDUSTRIES. ANY  
 UNAUTHORIZED USE OF THIS  
 DRAWING IS EXPRESSLY  
 PROHIBITED WITHOUT WRITTEN  
 PERMISSION FROM RF  
 INDUSTRIES. ANY VIOLATION IS  
 PUNISHABLE UNDER U.S.  
 COPYRIGHT LAWS.

**RFconnectors**

7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

**BNC JACK, CRIMP**

SIZE	CABLE GROUP	DWG NO.	REV
A	P	<b>RFB-1124-1P</b>	B
SCALE: NTS	ENGINEERING ID: 008974	SHEET 1 OF 1	