
			0	B A		
A Linead						
			LAYOUT SHOWN AS EXAMP	LE		
	Keying Shown as example					
CHARACTERISTICS	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium	Dim Nominal ØS 41.7 Max	_				
-Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	Z 31 Max VV THREAD M31x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Seals & Grommet : Silicon Elastomer			Country Jurisdiction & Control List			
<ul> <li>Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>Durability : 500 Mating cycles</li> </ul>			FR   Not Listed   2			
-Delivered with Souriau contacts and Accessories			PN: 8D521Z41BB			
-Temperature Range : -65°C to +175°C						
-Salt Spray : 500 hours		A 12-10-2016	First Release			
		ISS DATE	Latest modification - by		MOD N°	
		Designed By:				
		1116	Aluminum	Plug of selles		
ASIC SERIES: 8D 5 - 21 Z 4 SHELL TYPE : Plug with RFI Shielding	1 B B	SCALE NA	General linear Tolerances:	NPRDS / PROJECT <b>859</b>		
CONTACT TYPE : Standard Crimp Contact	ORIE			This document is the prope SOURIAU	erty of	
SHELL SIZE : 21	500 Matings)	WWW.SOURIAU.COM	it must not be reproduced communicated without perm			
PLATING : Z = Black Zinc Nickel	CONTACT LA		SOURIAU DR		SHEET	
		A3	8D521Z41B		1/2	
		· · · · · · · · · · · · · · · · · · ·				

					1		
	т	۵	<b>п</b>	m		<b>O</b>	
		Contact Layout					
4		+Y 7 HOLES 31° 25' 27" 41'					
	<	27*41/					
		635 DIA					
		Insert arrangement 21-41	7				
ယ	size no. cont	ber of Size Service Contact Supersedes tacts contacts rating location II 11 20 I All MS20055-41	_				
			_				
						SOURIAU shall not be liable for	
						due to a use of the Produc the Specifications issued by eitl	
						(professional recomme	enda
						C	ount FR
N							FR
						PN: 8D5	21
						16 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
						A	
					TITLE	Alu	mir
					SCALE	General lin Tolerance	
<u> </u>					NA		
					SOURIA	U WWW.SOURIA	U.(
					FORMAT	SOURI	AL
		-			A3	8D52	1Z
	Н	G	l F	E	D	C	

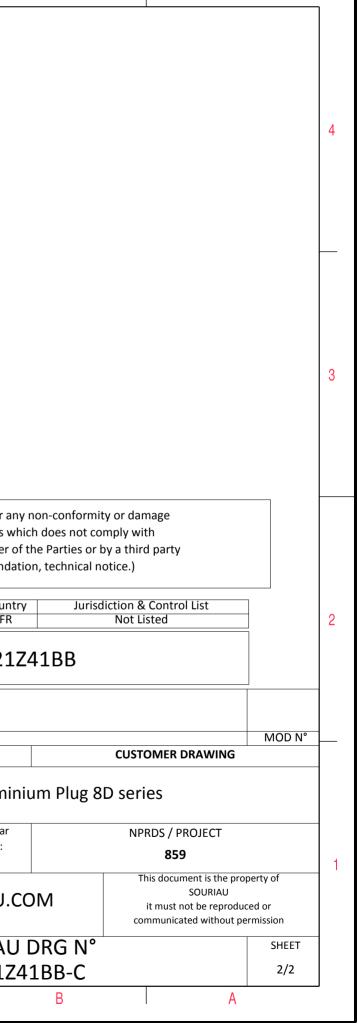

 $\triangleright$ 

σ