


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/17/14	C	DIM. Ø3.0 WAS Ø2.0	T.B.	B.S.	
07/07/17	D	DIM. 150.0 WAS 152.40 DIM. 5.0 WAS 3.18 DIM. 38.0 WAS 37.60 ADDED DIM. Ø1.95	T.B.	B.S.	
07/17/17	E	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	

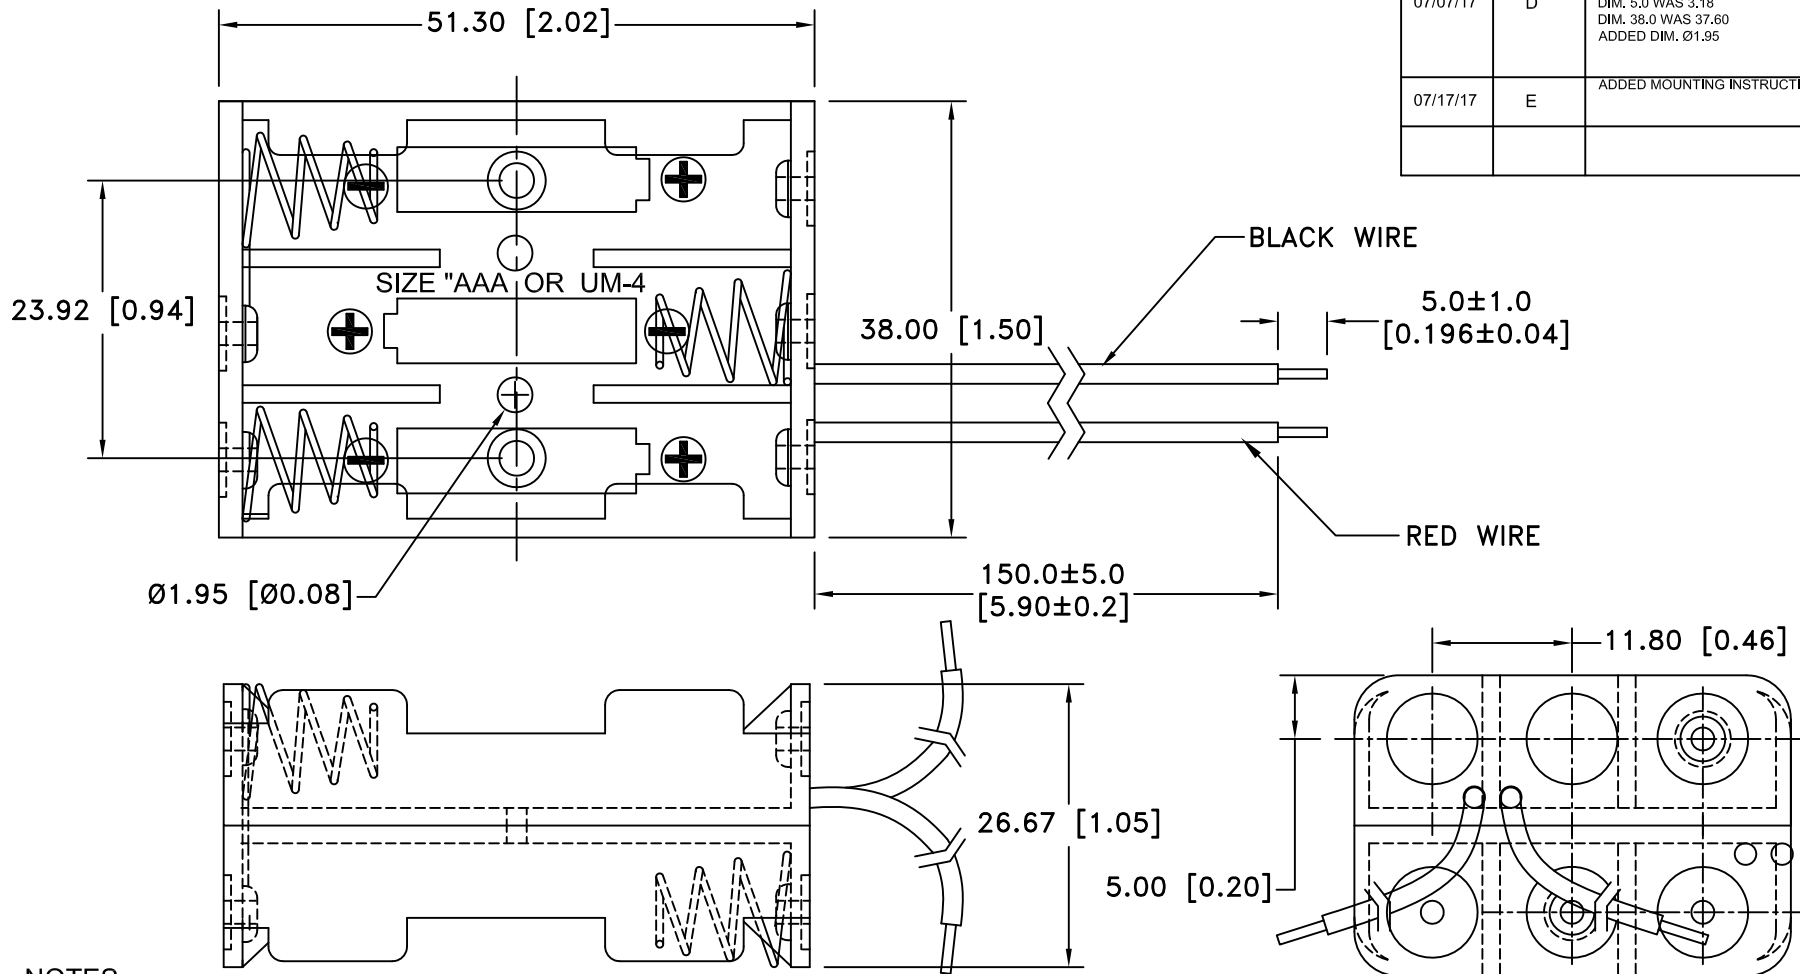


**NOTES:**

Plastic material - Polypropylene, Black  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Rivets - Brass, Nickel Plated  
 Wire: 26 awg, UL1007, CSA, TR64, 300V, 80°C  
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS 2 COMPLIANT

**Mounting Instruction:**

Use 2-56 machine screws or eyelets 0.089" OD  
 by 0.15" flange stimpson GS-3 series or equivalent.  
 also adhesives and double sided tapes work well.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title SIX "AAA" CELL HOLDER WITH WIRE LEADS		
Fractional ± .8 (.030)		Date 07/17/17	Drawing Number BH26AAAW
Angular ± 3°			