

MBR565LDS

LOW VF SCHOTTKY RECTIFIERS



VOLTAGE: 65 Volts

CURRENT: 5.0 Ampers

TO-252

Marking and Polarity

FEATURES



- Low Forward Voltage Drop for high efficiency
- Low leakage current for high reliability
- High forward surge capability for high reliability

MECHANICAL DATA

- Package:** TO-252
- Mounting Position:** Any
- Lead Free:** Lead Free Finish, RoHS Compliant
- Weight:** App.0.325 grams (0.0113 ounce)

TYPICAL APPLICATIONS

- For use in high frequency inverters ,AC/DC converters, DC/DC converters,LED driver etc. applications

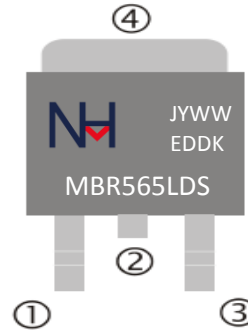

Remark:

- ①. NH=niuhang trademark
- ②. J=Product line code,According to actual changes
YWW=Data code,According to actual changes
EDDK=Inter control code,According to actual changes
- ③. MBR565LDS = Modle

Maximum Ratings(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	MBR565LDS	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	65	V
Maximum RMS voltage	V_{RMS}	46	V
Maximum DC blocking voltage	V_{DC}	65	V
Maximum average forward rectified current(see fig.1)	$I_{F(AV)}$	5.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	150	A
Current Squared Time Per Diode($t < 8.3ms$)	I^2t	93.38	A ² sec

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

Parameter	Test Conditions	Symbol	MBR565LDS			Unit
			Min.	Typ.	Max.	
Maximum instantaneous forward voltage (Note 1)	Ta=25°C IF= 5.0 A	V_F	--	0.54	0.58	V
Maximum instantaneous reversecurrent at rated DC blockingvoltage (Note 1)	Ta=25°C @ V_{RRM}	I_{RRM}	--	10	50	uA
	Ta=125°C @ 80%* V_{RRM}		--	2	10	mA
Typical junction capacitance	4V,1MHz	C_J	--	120	--	pF

Thermal Characteristcs (Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	MBR565LDS			Unit
Operating junction and storage temperature range	T_J	-55	to	150	°C
Storage temperature range	T_{STG}	-55	to	150	
Typical thermal resistance (Note 2)	$R_{\theta JA}$	25			°C/W
	$R_{\theta JL}$	8			

- Note:
- 1. Pulse width < 300 uS, Duty cycle < 2%
 - 2. P.C.B mounted with 10cm*10cm*1mm copper pad areas.

MBR565LDS

LOW VF SCHOTTKY RECTIFIERS



RATING AND CHARACTERISTIC CURVES

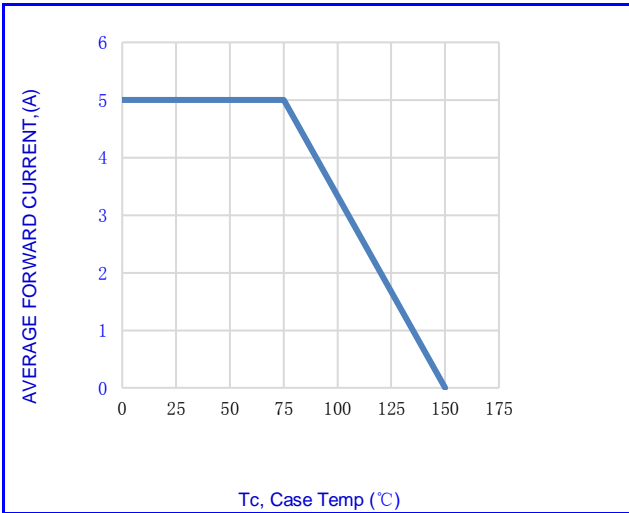


Fig.1-FORWARD CURRENT DERATING CURVE

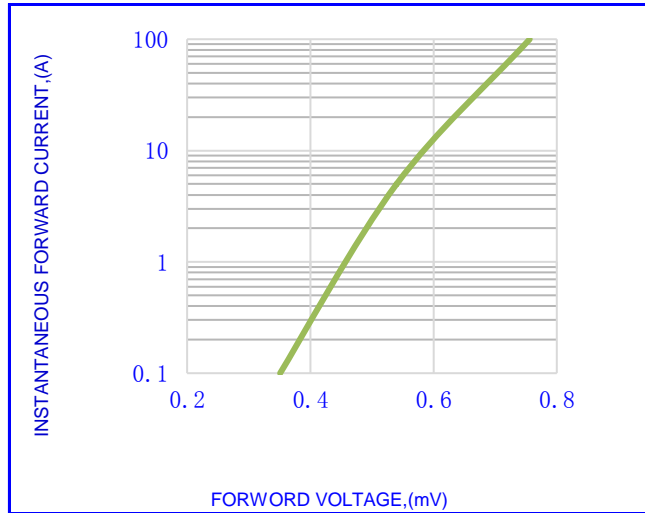


Fig.2- TYPICAL INSTANTANEOUS FORWARD

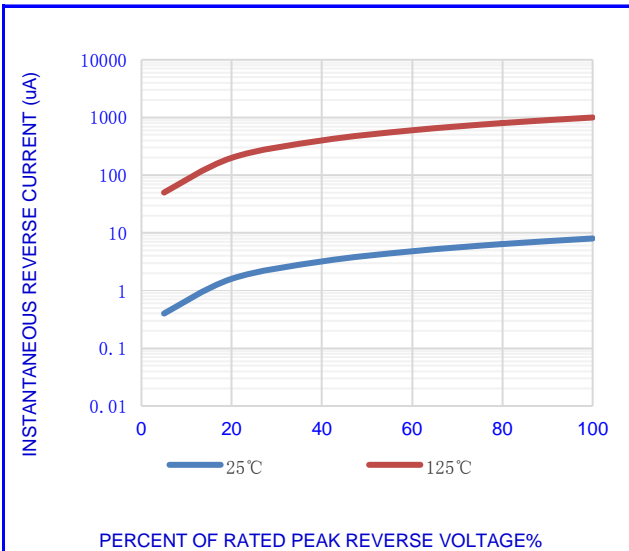


Fig.3- TYPICAL REVERSE CHARACTERISTICS

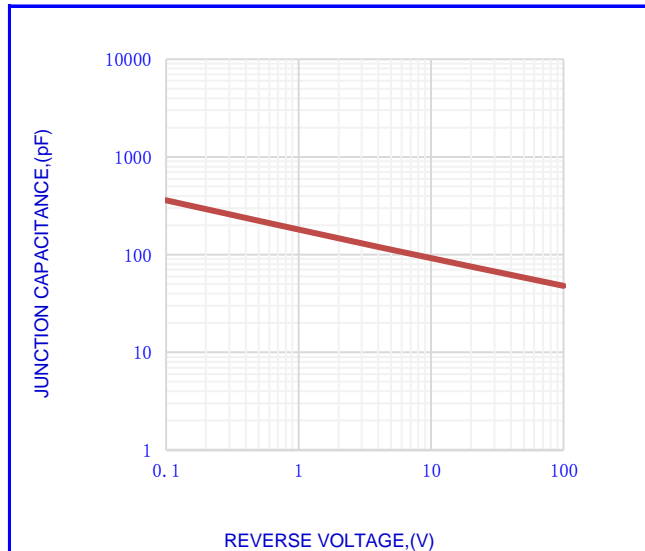


Fig.4-TYPICAL JUNCTION CAPACITANCE

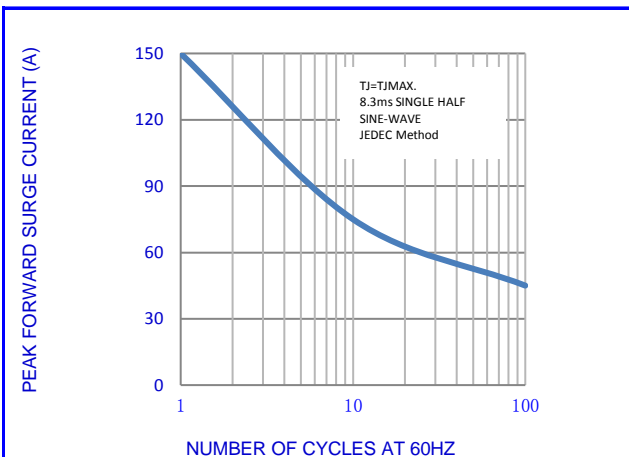


Fig.5-MAX. NON-REPETITIVE SURGE CURRENT

MBR565LDS

LOW VF SCHOTTKY RECTIFIERS



OUTLINE DRAWINGS				TO-252																																																																																																						
				OUTLINE DIMENSIONS																																																																																																						
				<table border="1"> <thead> <tr> <th rowspan="2">DIM.</th> <th colspan="3">Millimeters</th> <th colspan="3">Inches</th> </tr> <tr> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Min.</th> <th>DS</th> <th>Max.</th> </tr> </thead> <tbody> <tr><td>A</td><td>6.400</td><td>-</td><td>6.800</td><td>0.252</td><td>-</td><td>0.268</td></tr> <tr><td>B</td><td>5.200</td><td>-</td><td>6.200</td><td>0.205</td><td>-</td><td>0.244</td></tr> <tr><td>C</td><td>2.100</td><td>-</td><td>2.500</td><td>0.083</td><td>-</td><td>0.098</td></tr> <tr><td>D</td><td>4.800</td><td>-</td><td>5.500</td><td>0.189</td><td>-</td><td>0.217</td></tr> <tr><td>E</td><td>1.000</td><td>-</td><td>1.600</td><td>0.039</td><td>-</td><td>0.063</td></tr> <tr><td>F</td><td>0.500</td><td>-</td><td>1.000</td><td>0.020</td><td>-</td><td>0.039</td></tr> <tr><td>G</td><td>2.100</td><td>-</td><td>2.500</td><td>0.083</td><td>-</td><td>0.098</td></tr> <tr><td>H</td><td>2.800</td><td>-</td><td>3.500</td><td>0.110</td><td>-</td><td>0.138</td></tr> <tr><td>J</td><td>0.400</td><td>-</td><td>0.600</td><td>0.016</td><td>-</td><td>0.024</td></tr> <tr><td>K</td><td>-</td><td>0.080</td><td>-</td><td>-</td><td>0.003</td><td>-</td></tr> <tr><td>L</td><td>0.900</td><td>-</td><td>1.400</td><td>0.035</td><td>-</td><td>0.055</td></tr> <tr><td>M</td><td>-</td><td>0.500</td><td>-</td><td>-</td><td>0.020</td><td>-</td></tr> <tr><td>N</td><td>1.300</td><td>-</td><td>1.800</td><td>0.051</td><td>-</td><td>0.071</td></tr> </tbody> </table>			DIM.	Millimeters			Inches			Min.	Typ.	Max.	Min.	DS	Max.	A	6.400	-	6.800	0.252	-	0.268	B	5.200	-	6.200	0.205	-	0.244	C	2.100	-	2.500	0.083	-	0.098	D	4.800	-	5.500	0.189	-	0.217	E	1.000	-	1.600	0.039	-	0.063	F	0.500	-	1.000	0.020	-	0.039	G	2.100	-	2.500	0.083	-	0.098	H	2.800	-	3.500	0.110	-	0.138	J	0.400	-	0.600	0.016	-	0.024	K	-	0.080	-	-	0.003	-	L	0.900	-	1.400	0.035	-	0.055	M	-	0.500	-	-	0.020	-	N	1.300	-
DIM.	Millimeters			Inches																																																																																																						
	Min.	Typ.	Max.	Min.	DS	Max.																																																																																																				
A	6.400	-	6.800	0.252	-	0.268																																																																																																				
B	5.200	-	6.200	0.205	-	0.244																																																																																																				
C	2.100	-	2.500	0.083	-	0.098																																																																																																				
D	4.800	-	5.500	0.189	-	0.217																																																																																																				
E	1.000	-	1.600	0.039	-	0.063																																																																																																				
F	0.500	-	1.000	0.020	-	0.039																																																																																																				
G	2.100	-	2.500	0.083	-	0.098																																																																																																				
H	2.800	-	3.500	0.110	-	0.138																																																																																																				
J	0.400	-	0.600	0.016	-	0.024																																																																																																				
K	-	0.080	-	-	0.003	-																																																																																																				
L	0.900	-	1.400	0.035	-	0.055																																																																																																				
M	-	0.500	-	-	0.020	-																																																																																																				
N	1.300	-	1.800	0.051	-	0.071																																																																																																				

RECOMMENDED LAYOUT DRAWINGS				TO-252																																																					
				RECOMMENDED LAYOUT DIMENSIONS																																																					
				<table border="1"> <thead> <tr> <th rowspan="2">Dim.</th> <th colspan="3">Millimeters</th> <th colspan="3">Inches</th> </tr> <tr> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr><td>A</td><td>-</td><td>6.09</td><td>-</td><td>-</td><td>0.24</td><td>-</td></tr> <tr><td>B</td><td>-</td><td>7.57</td><td>-</td><td>-</td><td>0.298</td><td>-</td></tr> <tr><td>C</td><td>-</td><td>6.64</td><td>-</td><td>-</td><td>0.261</td><td>-</td></tr> <tr><td>D</td><td>-</td><td>2.3</td><td>-</td><td>-</td><td>0.091</td><td>-</td></tr> <tr><td>E</td><td>-</td><td>2.76</td><td>-</td><td>-</td><td>0.109</td><td>-</td></tr> <tr><td>F</td><td>-</td><td>1.42</td><td>-</td><td>-</td><td>0.056</td><td>-</td></tr> </tbody> </table>			Dim.	Millimeters			Inches			Min.	Typ.	Max.	Min.	Typ.	Max.	A	-	6.09	-	-	0.24	-	B	-	7.57	-	-	0.298	-	C	-	6.64	-	-	0.261	-	D	-	2.3	-	-	0.091	-	E	-	2.76	-	-	0.109	-	F	-	1.42
Dim.	Millimeters			Inches																																																					
	Min.	Typ.	Max.	Min.	Typ.	Max.																																																			
A	-	6.09	-	-	0.24	-																																																			
B	-	7.57	-	-	0.298	-																																																			
C	-	6.64	-	-	0.261	-																																																			
D	-	2.3	-	-	0.091	-																																																			
E	-	2.76	-	-	0.109	-																																																			
F	-	1.42	-	-	0.056	-																																																			

PACKING INFORMATION				TO-252		
Package Method	Reel Size (mm)	Quantity (pcs/reel)	Inner Box Size LxWxH(mm)	Quantity (pcs/Inner Box)	Outer Carton Size LxWxH(mm)	Quantity (pcs/carton)
Tape Reel	Φ330	2500	340x340x50	5000	360x360x260	25000

MBR565LDS


LOW VF SCHOTTKY RECTIFIERS



Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds

Recommended temperature profile for IR reflow

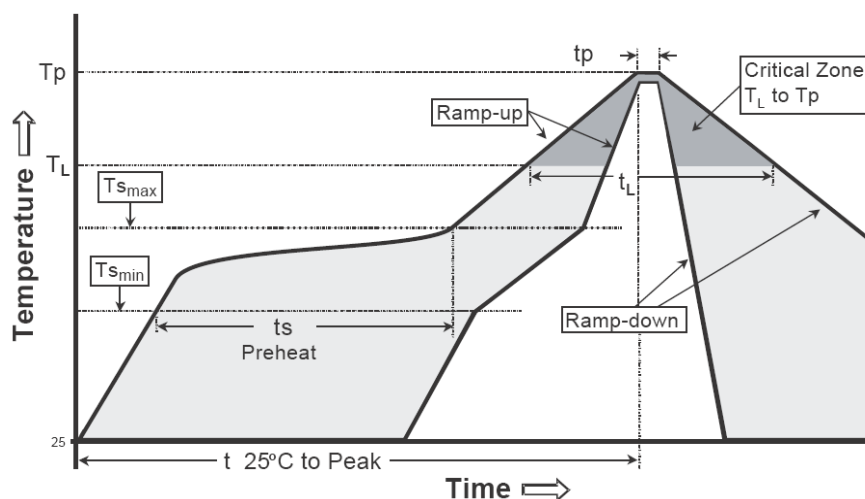

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmmax to Tp)	3°C/second max.	3°C/second max.
Preheat -Temperature Min(TS min) -Temperature Max(TS max) -Time(ts min to ts max)	100°C 150°C 60-120 seconds	150°C 200°C 60-180 seconds
Time maintained above: -Temperature (TL) - Time (tL)	183°C 60-150 seconds	217°C 60-150 seconds
Peak Temperature(TP)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

MBR565LDS

LOW VF SCHOTTKY RECTIFIERS



Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from niuhang Electronics co., LTD
- Niuhan Electronics co., LTD. reserves the rights to make changes of the content herein the document anytime without notification.
- Niuhan Electronics co., LTD. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Niuhan Electronics co., LTD. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Niuhan Electronics co., LTD. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Niuhan Electronics co., LTD. for any damages resulting from such improper use or sale.
- When the appearance of the product and chip size does not change, in order to product the customer quality, change the internal structure and the production process Niuhan can not notify