


Recommended PCB Layout
(top view)

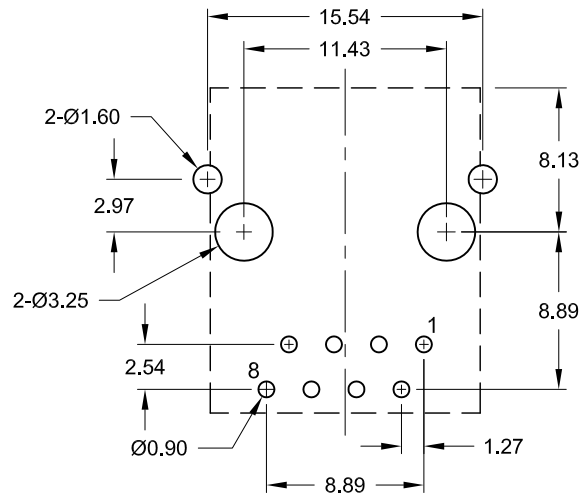

Materials and Finish

Housing Material-
PBT Thermoplastic
UL 94V-0 Rated
Color: Black
Shield Material-
Brass
Nickel Plated
Design meets UL 1863 Sec. 8
Electrical Probe and Sec. 20
Child Finger test requirements
Contact Material-
Phosphor Bronze
Contact Plating Options-
Standard: 0.0001" Nickel
Plating, Selective Plating
Gold Flash on Contact
Area, Tin on Termination End
50 Option: 0.0001" Nickel Plating,
Selective Plating 0.000050"
Gold on Contact Area to
Comply with FCC Requirements
Under No. 47 C.F.R. Part 68,
Subpart F, Tin on Termination End

Electrical Characteristics

Current Rating-
1.5 Amps
Voltage Rating-
125V DC
Insulation Resistance-
500 Megohms min.
Dielectric Withstanding Voltage-
1000V rms, 60Hz
Contact Resistance-
20 milliohms max.
Operating Temperature-
-40°C to +80°C
Durability Rating-
500 mating cycles min.

Part Number	Contact Area Plating Finish
GMX-S2-88	Gold Flash (standard)
GMX-S2-88 -50	50u" Gold (50 option)



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	7/13/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	6/30/05
A2	5/17/06	Release Drawing	H. MA	N/A		
A3	05/13/10	ECO #10-025	S. Vien	H. MA		
A4	05/22/15	ECO #15-001	H. MA	C. Furumasu		
A5	06/19/17	ECO #17-014	H. MA	C. Furumasu		

GMX-S2-88

Right Angle Modular Jack, Shielded, RoHS Compliant

8 position, 8 contacts, with ground tabs

