
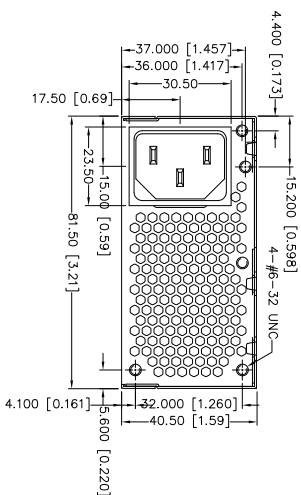


3 增加束線帶

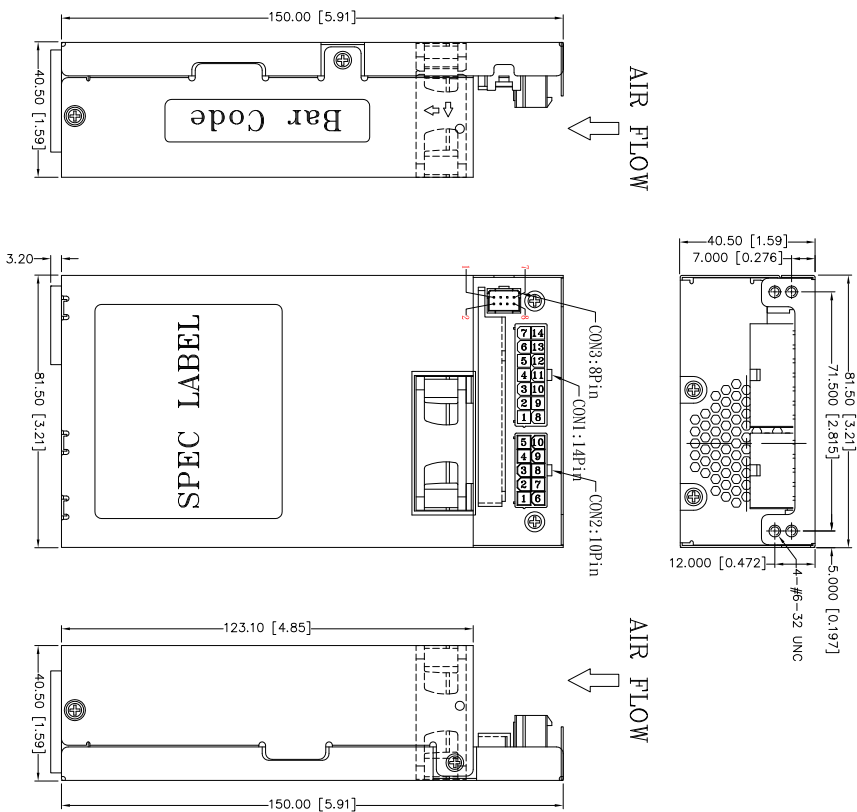

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	Gauge	CONNECTOR TYPE	CABLE LENGTH
P1	1	+3.3V	ORANGE	20	WST	200±15mm
	2	+3.3V	ORANGE	20	P20-142002Z-B	
	3	COM	BLACK	20	or EQUIV.	
	4	+5V	RBD	20		
	5	COM	BLACK	20		
P2	6	+5V	RBD	20		310±15mm
	7	COM	BLACK	20		
	8	PW-OK	GRAY	24		
	9	+5Vsb	PURPLE	24		
	10	+3.3V	YELLOW	20		
	11	+3.3Vsb	BROWN	24		
	12	-12V	BROWN	24		
	13	COM	BLACK	24		
	14	PS-ON	GREEN	24		
	15	COM	BLACK	20		
P3	16	COM	BLACK	20		142002Z-B or EQUIV.
	17	COM	BLACK	20		
	18	COM	BLACK	20		
	19	+5V	RBD	20		
P4	20	COM	BLACK	20		250±15mm or EQUIV.
	1	COM	BLACK	20		
	2	COM	BLACK	20		
	3	+12V	YELLOW	20		
P5	4	+12V	YELLOW	20		155±10mm or EQUIV.
	1	+3.3V	ORANGE	20		
	2	COM	BLACK	20		
	3	+5V	RBD	20		
P6	4	+5V	RBD	20		310±15mm or EQUIV.
	1	+12V	YELLOW	20		
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	5	+12V	YELLOW	20		
P7	6	+3.3V	ORANGE	20		155±10mm or EQUIV.
	2	+3.3V	RBD	20		
	3	+5V	RBD	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
P8	6	+3.3V	ORANGE	20		155±10mm or EQUIV.
	2	+3.3V	RBD	20		
	3	+5V	RBD	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		

P/N.:9PA1507700

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 所有膠殼均需使用黑色膠殼(CON3及其對應8Pin膠殼除外).
3. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

MODEL NO. : FSP150-50FGNBI(M)(STD0001)	TITLE: ASSY	SHEET: 1 OF 1	REV:03
R&D(2)	PE	DRAWN	DATE
INTERIOR COUNTERSIGN:		黃淑芳	OCT.19.2018