


PNP Transistor

Features

- For Switching and AF Amplifier Applications.

SOT-23




1.Base 2.Emitter 3.Collector

Marking Code:

2SB1198Q : BNQ

2SB1198R : BNR

Equivalent Circuit



Absolute Maximum Ratings







Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	80	V
Collector Emitter Voltage	$-V_{CEO}$	80	V
Emitter Base Voltage	$-V_{EBO}$	5	V
Collector Current	$-I_C$	500	mA
Maximum Power Dissipation	P_D	200	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Electrical Characteristics (T_A=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at V _{CE} = -3 V, I _C = -100 mA	Gain Group Q R	H _{FE}	120 180	-- --	270 390	--
Collector Base Cutoff Current at V _{CB} = -50 V		-I _{CBO}	--	--	500	nA
Collector Emitter Cutoff Current at V _{CE} = -64 V		-I _{CEO}	--	--	5	μA
Emitter Base Cutoff Current at V _{EB} = -4 V		-I _{EBO}	--	--	500	nA
Collector Base Breakdown Voltage at I _C = -50 μA		-V _{(BR)CBO}	80	--	--	V
Collector Emitter Breakdown Voltage at I _C = -2 mA		-V _{(BR)CEO}	80	--	--	V
Emitter Base Breakdown Voltage at I _E = -50 μA		-V _{(BR)EBO}	5	--	--	V
Collector Emitter Saturation Voltage at I _C = -500 mA, I _B = -50 mA		-V _{CE(sat)}	--	--	0.5	V
Base Emitter Saturation Voltage at I _C = -500 mA, I _B = -50 mA		-V _{BE(sat)}	--	--	1.2	V
Transition Frequency at V _{CE} = -10 V, I _C = -50 mA, f = 100 MHz		F _T	--	180	--	MHz
Output Capacitance at V _{CB} = -10 V, f = 1 MHz		C _{ob}	--	11	--	pF





Typical Characteristic Curves

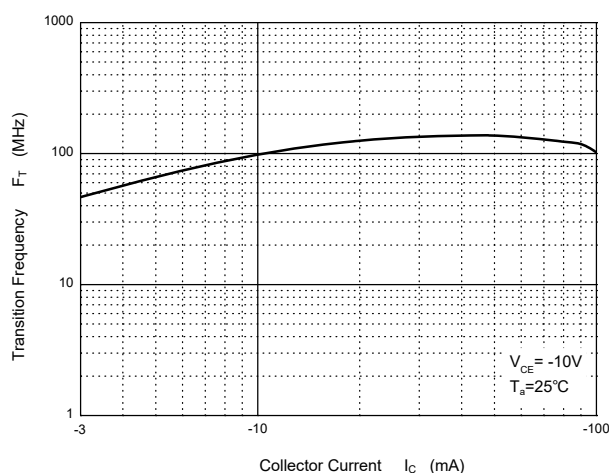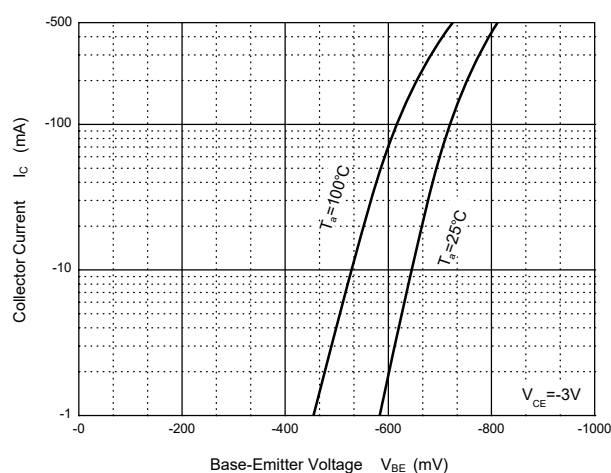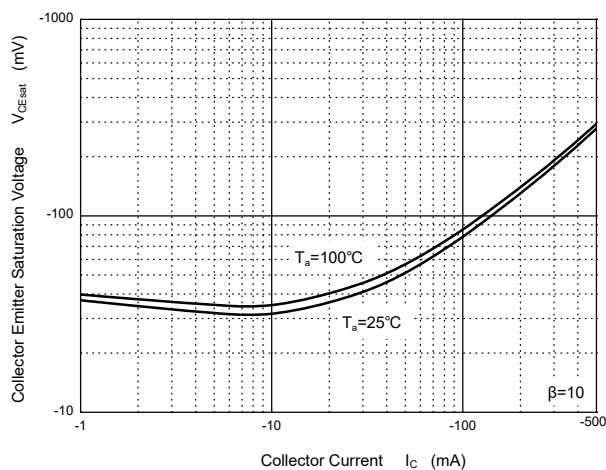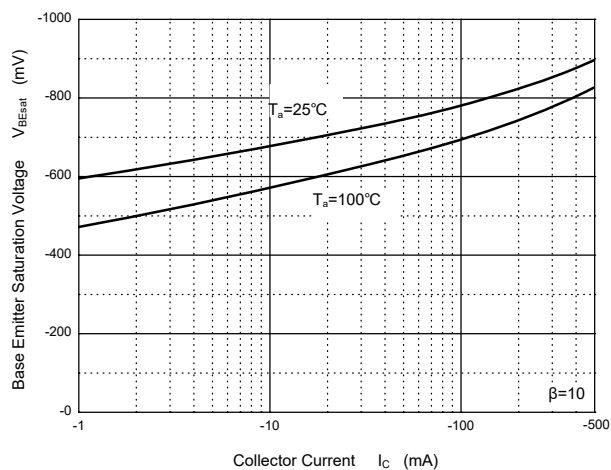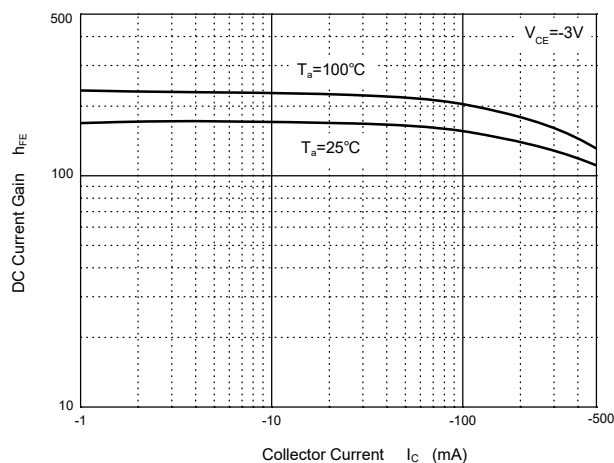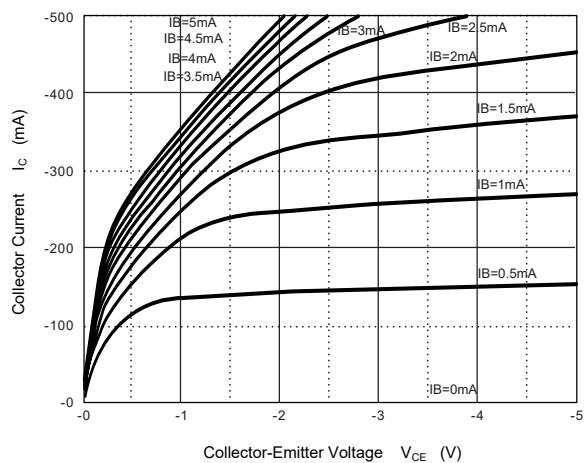

Package Outline

SOT-23

Dimensions in mm

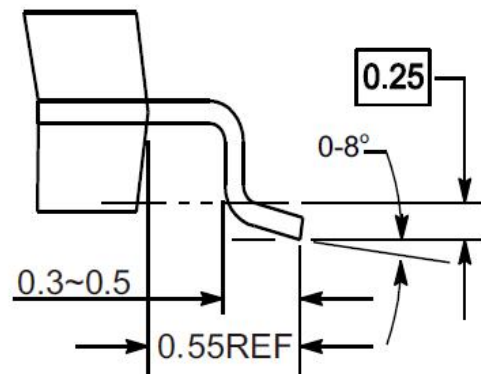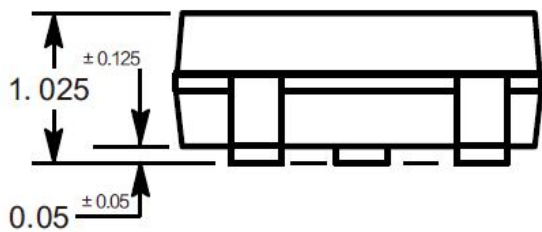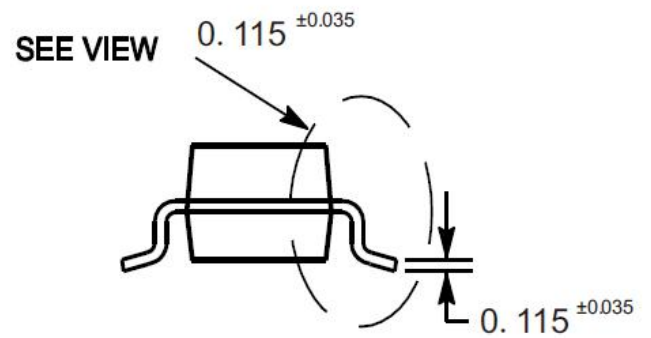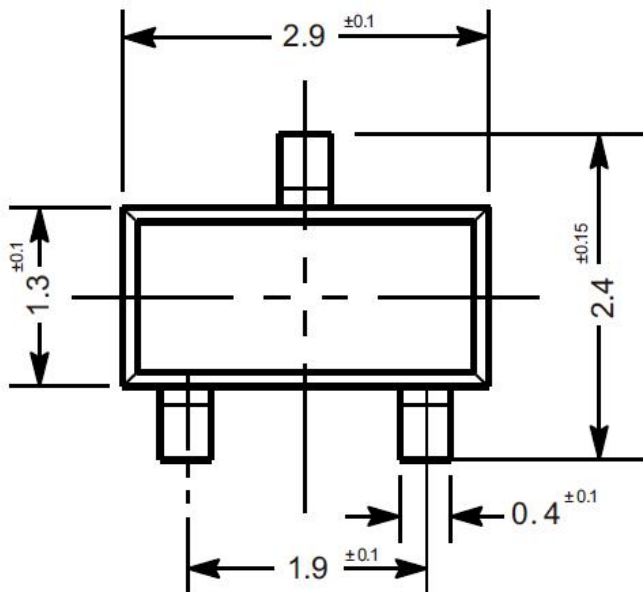

VIEW C

Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering



Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering

- Temperature: 370 °C
- Time: 3s max.
- Times: one time

◆ Storage conditions

- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing