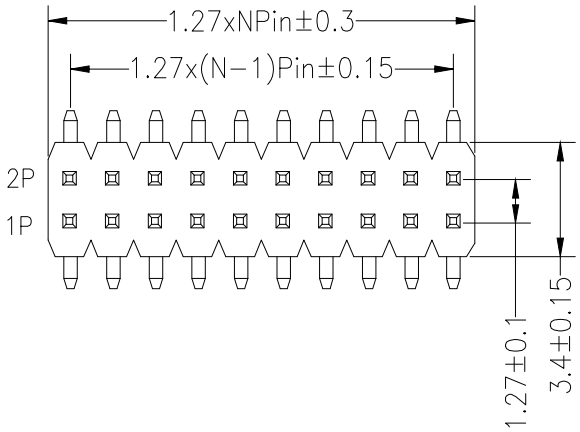

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

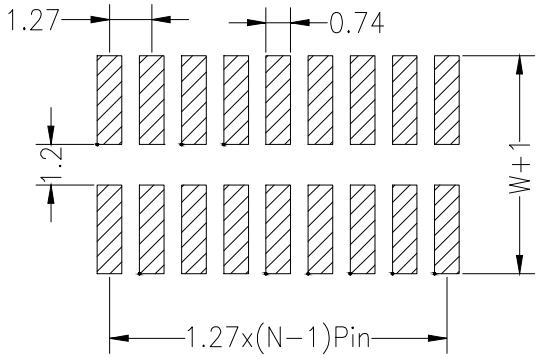

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

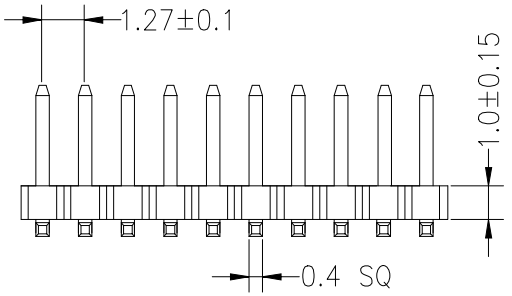

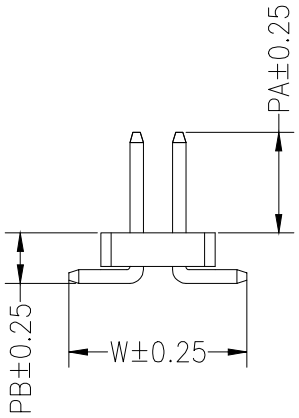

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	4.00	1.50	5.30	7.20
Alternate				

Ordering Information

PZ 127 - * - N - S - * - **

- * : No.of Rows — 1=Single Row, 2=Dual Row
- N : No.of Pins — 2-40Pin
- S : Type — Z=直针, W=弯针, S=立贴, WS=卧贴
- * : Length (产品塑高)
- ** : Contact Plating — G0:Gold Flash, G1:1u" Gold, G2:3u" Gold, G3:5u" Gold, G4:10u" Gold, G5:15u" Gold, G6:30u" Gold, S0:Gold Flash/Tin, S1:Tin

序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE
1	初版发行	

GENERL TOLERANCE

DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

制 图 DRAWING	
审 核 CHECK	
批 准 APPROVAL	
比 例 SCALE	
投 影 Projection	

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	1.27双排 排针 贴片(塑高1.0)	版 本 REV.	A
产品料号 PART NO.	PZ127-2-N-S-1.0-XX	单 位 UNITS	mm
材 料 MATERIAL		页 次 SHEET	1/1