HDP24-24-23PT V ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: HDP24-24-23PT Housing for Male Terminals, Wire-to-Wire, 23 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings



Connector System: Wire-to-Wire

Number of Positions: 23

Connector & Housing Type: Housing for Male Terminals

Sealable: Yes

Mating Pin Diameter: 1.59 mm [.063 in]

All DEUTSCH HDP20 Housings (324)

Features

Product Type Features

Mixed & Hybrid Connector

Connector Shape

No

Circular

Connector System	Wire-to-Wire		
Connector & Housing Type	Housing for Male Terminals		
Sealable	Yes		
Connector & Contact Terminates To	Wire & Cable		
Primary Locking Feature	Contact Retainer		
Configuration Features			
Blank Cavity Position	0		
Connector Seal Code	T Seal		
Number of Positions	23		
Electrical Characteristics			
Operating Voltage	250 VAC		
Nominal Voltage Architecture	12 V, 24 V, 48 V		
Body Features			
Cable Exit Angle	180°		
Primary Product Color	Black		

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 23 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



Contact Features

Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Guide Post
Mating Alignment	With
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	PAGF
Dimensions	
Connector Height	47.63 mm[1.875 in]
Product Width	50.8 mm[2 in]
Product Length	41.86 mm[1.648 in]
Compatible Insulation Diameter Range	2.23 – 3.4 mm[.088 – .134 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP67
UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	

Housing for Male Terminals, Wire-to-Wire, 23 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

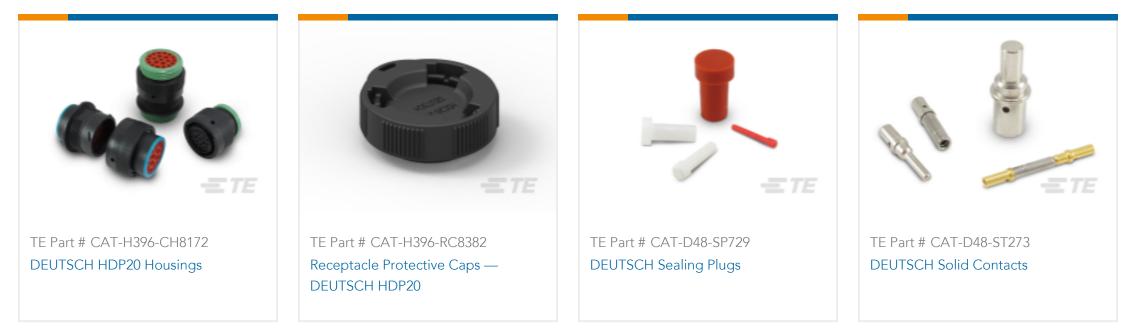


Housing for Male Terminals, Wire-to-Wire, 23 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



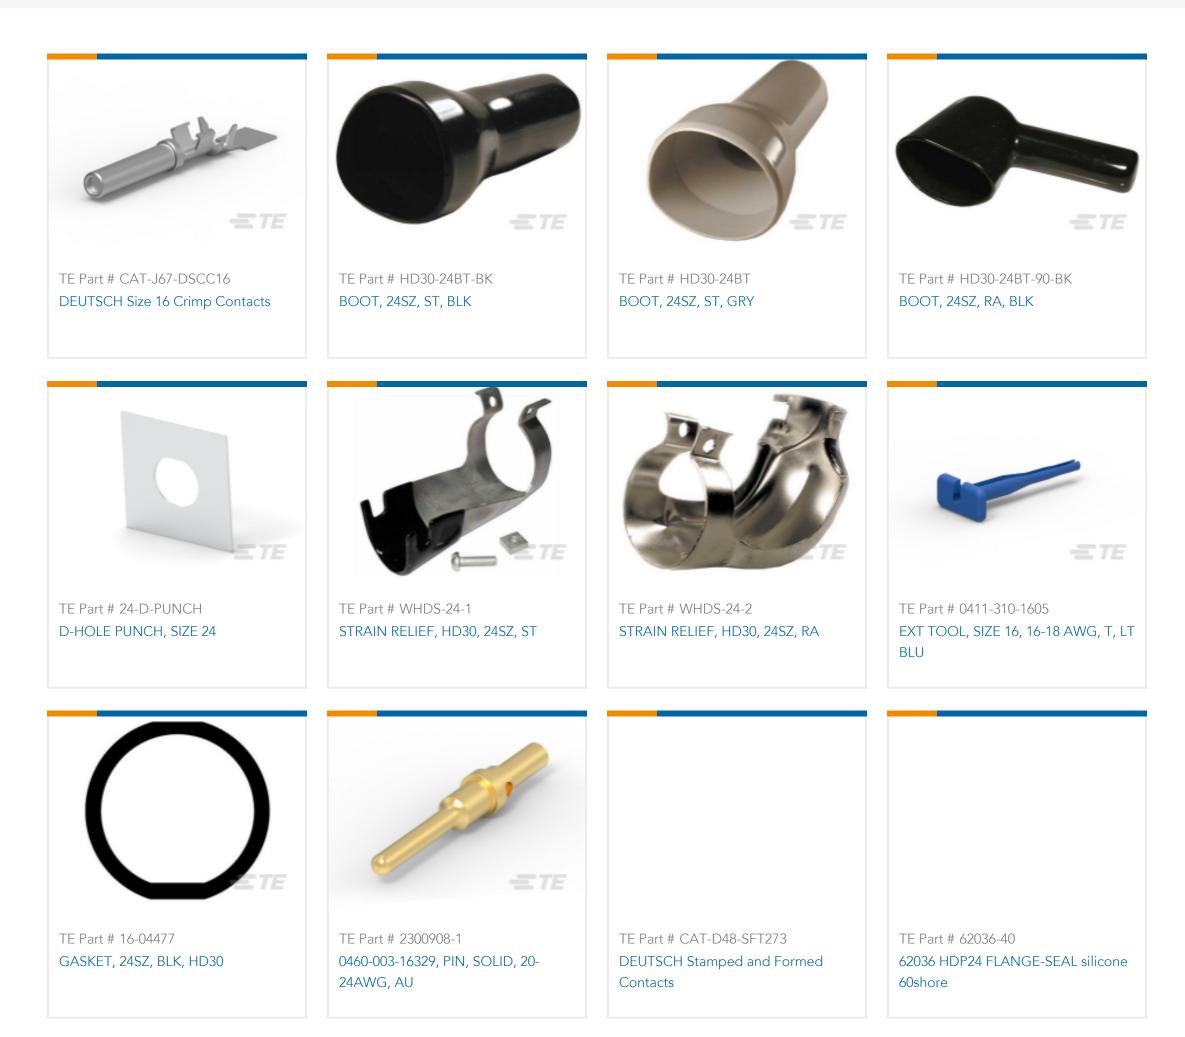


TE Part # MT-90BT-HT-24 BOOT, 24SZ, RA, HI TEMP, YEL	TE Part # MT-90BT-HT-24BK BOOT, 24SZ, RA, HI TEMP, BLK

Also in the Series | DEUTSCH HD

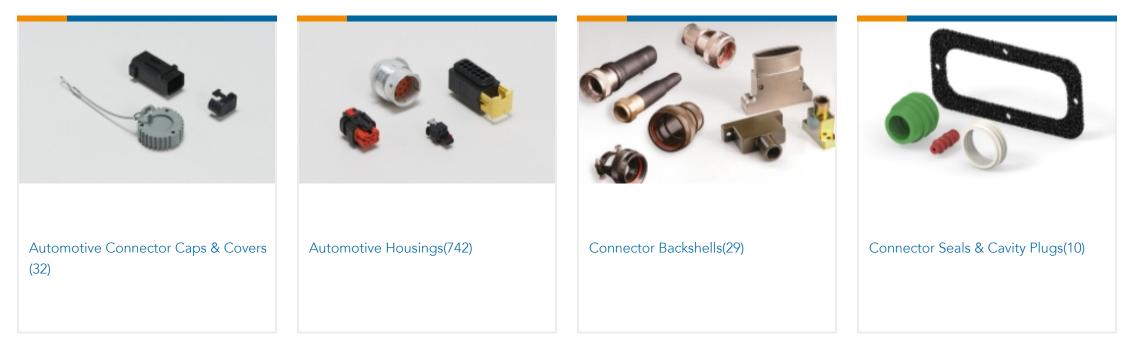


Housing for Male Terminals, Wire-to-Wire, 23 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



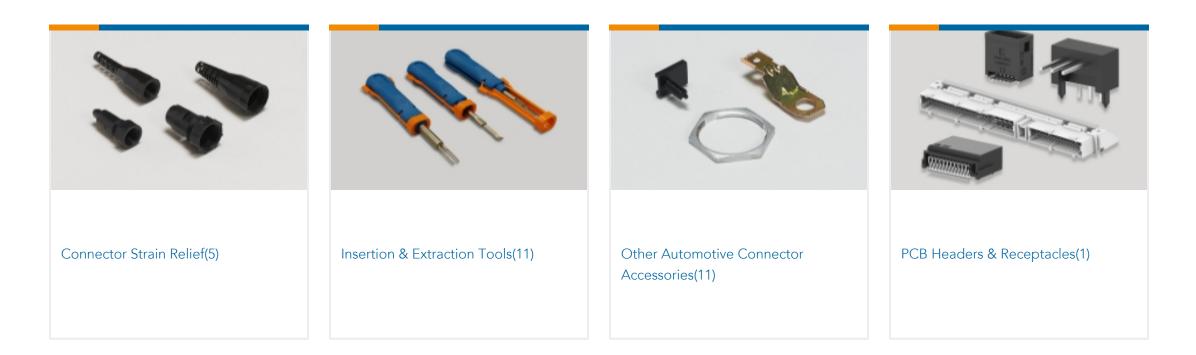

Also in the Series DEUTSCH HDP

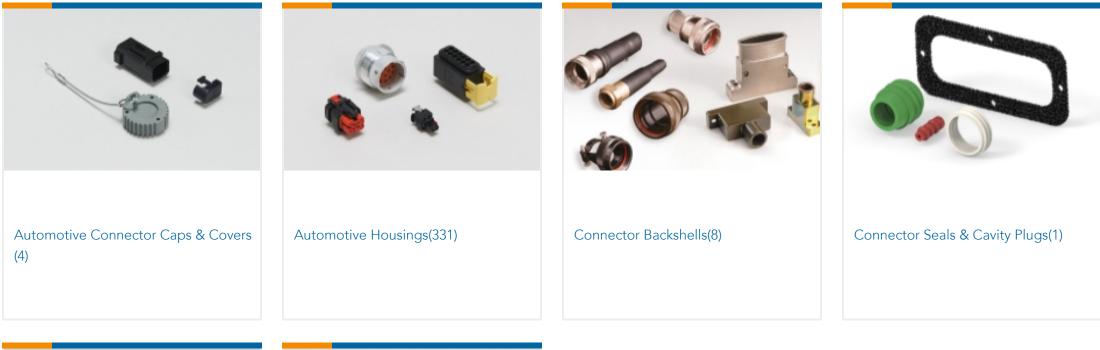





Insertion & Extraction Tools(11)

Other Automotive Connector Accessories(5)

Customers Also Bought





Housing for Male Terminals, Wire-to-Wire, 23 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



Documents

Product Drawings REC, 23P, BLK, T, 16, P

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_HDP24-24-23PT_E.2d_dxf.zip English Customer View Model ENG_CVM_CVM_HDP24-24-23PT_E.3d_igs.zip English Customer View Model ENG_CVM_CVM_HDP24-24-23PT_E.3d_stp.zip

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

0

Product Specifications Application Specification

English

Agency Approvals UL Report

English