

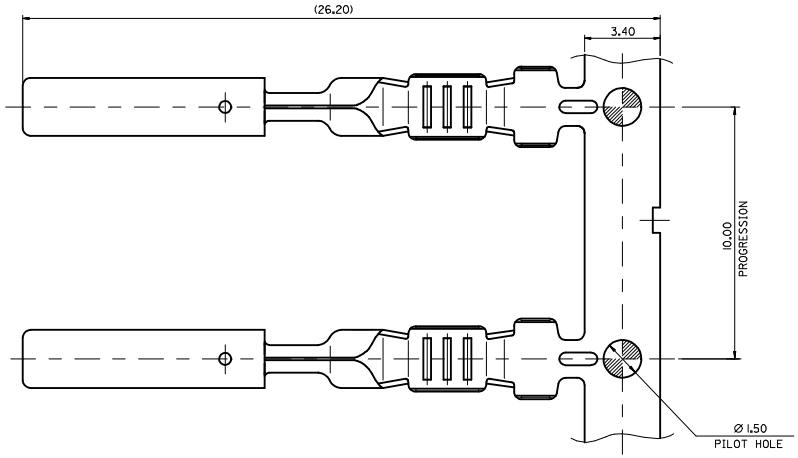



SECTION A-A



SECTION B-B



SECTION D-D

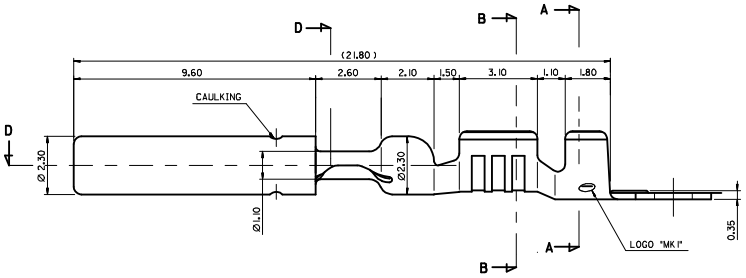



NOTE
1. RECOMMENDED LENTH OF WIRE STRIP : 4.0~4.6
2. FINISH : CIRCULOCK F/TML BODY(TIN PLATING), SLEEVE(TIN PLATING)
3. WIRE RANGE (mm2) : AVS(AVSS) 0.3~0.85
4. MATERIAL

NO.	ENG. NO.	PART NAME	MATERIAL
1	35402-8002	CIRCULOCK F/TML BODY	COPPER ALLOY THICKNESS 0.25
2	35401-9102	SLEEVE	BRASS (THICKNESS : 0.25)

REVISED
EC NO: KTR2015-0113 2015/06/09
DRWN: JKSE001
CH'KD:
APPR: JYCHO1 2015/07/22
REV DESCRIPTION

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± 0.15	± ---
ANGULAR ± 1 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 10:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JKSE001 DATE: 2015/06/09
CHECKED BY DATE
APPROVED BY DATE

TITLE: 1.0 FEMALE TERMINAL

molex MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-35403-1002
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION