


PART NO.		<b>ROA-5405-LP</b>		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	03/26/18	JDMc

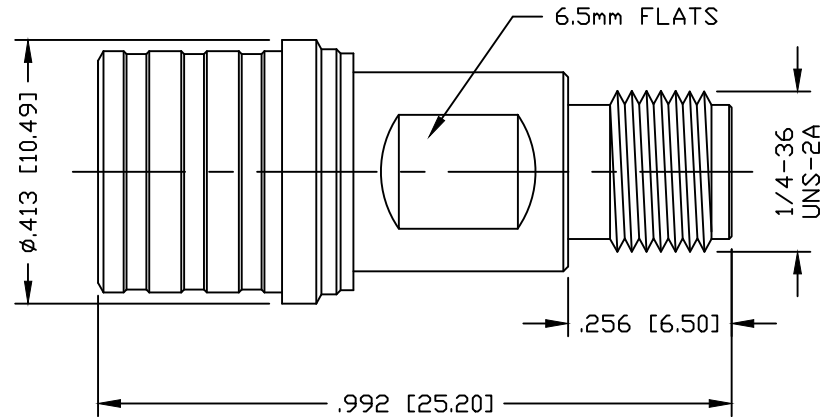

### SPECIFICATIONS:

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-11 GHz  
 VSWR:  $\leq 1.052$  @ 4 GHz;  $\leq 1.173$  @ 6GHz  
 3rd ORDER IM:  $< -155$  dBc  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms MIN.  
 INSULATION RESISTANCE: 5000M $\Omega$   
 TEMPERATURE RANGE: -65°C TO 165°C

5	COLLET RING	1	BeCu	WHITE BRONZE
4	COUPLING NUT	1	BRASS	WHITE BRONZE
3	CONTACT	1	PHOS. BRONZE	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	03/26/18
CHECKED	
ORJ DRAWN C. ZUNIGA	03/26/18

**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS  
 INFORMATION PROPRIETARY TO  
 RF INDUSTRIES. ANY  
 UNAUTHORIZED USE OF THIS  
 DRAWING IS EXPRESSLY  
 PROHIBITED WITHOUT WRITTEN  
 PERMISSION FROM RF  
 INDUSTRIES. ANY VIOLATION IS  
 PUNISHABLE UNDER U.S.  
 COPYRIGHT LAWS.

**RFconnectors**  
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX

<b>QMA PLUG TO SMA JACK ADAPTER</b>			
SIZE A	CABLE GROUP N/A	DWG NO. <b>RQA-5405-LP</b>	REV ---
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	