


- Ultra compact SMD package
13.2 x 9.1 x 10.2 mm
- I/O-isolation 1'600 VDC
- Fully regulated outputs
- Operating temperature range
-40°C to +75°C
- Short circuit protection
- Remote On/Off
- 3-year product warranty
- Designed to meet UL 62368-1
(UL 60950-1)



The TDN 5WISM Series redefines the power density of high performance DC/DC converters. The cubical package of only 1.23 cm³ encloses a sophisticated circuit which provides 5 Watt output power without any compromise regarding reliability and functionality. They operate up to 50°C environment temperature at full load or up to 70°C with a 50% load de-rating. With 1'600 VDC I/O-isolation voltage, external On/Off and short current protection, they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (4:1) and minimum load is not required. The functional I/O-isolation system is designed to meet IEC/EN 62368-1 with a test voltage (60 s) of 1'600 VDC.

| Models | | | | | | |
|----------------|--------------------------------|-----------------------------|------------------|----------|------------------|-----------------|
| Order Code | Input Voltage Range | Output 1 | | Output 2 | | Efficiency typ. |
| | | Vnom | I _{max} | Vnom | I _{max} | |
| TDN 5-0910WISM | 4.5 - 13.2 VDC (9 VDC nom.) | 3.3 VDC | 1'000 mA | | | 76 % |
| TDN 5-0911WISM | | 5 VDC | 1'000 mA | | | 80 % |
| TDN 5-0919WISM | | 9 VDC | 555 mA | | | 81 % |
| TDN 5-0912WISM | | 12 VDC | 420 mA | | | 83 % |
| TDN 5-0913WISM | | 15 VDC | 333 mA | | | 83 % |
| TDN 5-0915WISM | | 24 VDC | 210 mA | | | 83 % |
| TDN 5-0921WISM | | +5 VDC | 500 mA | -5 VDC | 500 mA | 80 % |
| TDN 5-0922WISM | | +12 VDC | 210 mA | -12 VDC | 210 mA | 83 % |
| TDN 5-0923WISM | | +15 VDC | 168 mA | -15 VDC | 168 mA | 83 % |
| TDN 5-2410WISM | | 9 - 36 VDC (24 VDC nom.) | 3.3 VDC | 1'000 mA | | |
| TDN 5-2411WISM | 5 VDC | | 1'000 mA | | | 80 % |
| TDN 5-2419WISM | 9 VDC | | 555 mA | | | 81 % |
| TDN 5-2412WISM | 12 VDC | | 420 mA | | | 83 % |
| TDN 5-2413WISM | 15 VDC | | 333 mA | | | 83 % |
| TDN 5-2415WISM | 24 VDC | | 210 mA | | | 83 % |
| TDN 5-2421WISM | +5 VDC | | 500 mA | -5 VDC | 500 mA | 80 % |
| TDN 5-2422WISM | +12 VDC | | 210 mA | -12 VDC | 210 mA | 83 % |
| TDN 5-2423WISM | +15 VDC | | 168 mA | -15 VDC | 168 mA | 84 % |
| TDN 5-4810WISM | 18 - 75 VDC (48 VDC nom.) | | 3.3 VDC | 1'000 mA | | |
| TDN 5-4811WISM | | 5 VDC | 1'000 mA | | | 81 % |
| TDN 5-4819WISM | | 9 VDC | 555 mA | | | 81 % |
| TDN 5-4812WISM | | 12 VDC | 420 mA | | | 83 % |
| TDN 5-4813WISM | | 15 VDC | 333 mA | | | 83 % |
| TDN 5-4815WISM | | 24 VDC | 210 mA | | | 83 % |
| TDN 5-4821WISM | | +5 VDC | 500 mA | -5 VDC | 500 mA | 80 % |
| TDN 5-4822WISM | | +12 VDC | 210 mA | -12 VDC | 210 mA | 83 % |
| TDN 5-4823WISM | | +15 VDC | 168 mA | -15 VDC | 168 mA | 84 % |

Input Specifications

| | | |
|--------------------------|--------------|--|
| Input Current | - At no load | 9 Vin models: 80 mA typ. 24 Vin models: 30 mA typ. 48 Vin models: 15 mA typ. |
| Surge Voltage | | 9 Vin models: 15 VDC max. (1 s max.) 24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) |
| Reflected Ripple Current | | 9 Vin models: 40 mAp-p typ. 24 Vin models: 20 mAp-p typ. 48 Vin models: 15 mAp-p typ. |
| Recommended Input Fuse | | 9 Vin models: 2'500 mA (slow blow) 24 Vin models: 1'250 mA (slow blow) 48 Vin models: 630 mA (slow blow) (The need of an external fuse has to be assessed in the final application.) |
| Input Filter | | Internal Capacitor |

Output Specifications

| | | |
|--------------------------|--|---|
| Voltage Set Accuracy | | ±1% max. |
| Regulation | - Input Variation (Vmin - Vmax) - Load Variation (0 - 100%) - Cross Regulation (25% / 100% asym. load) | single output models: 0.2% max. dual output models: 0.2% max. single output models: 1% max. dual output models: 1% max. (Output 1) 1% max. (Output 2) dual output models: 5% max. |
| Ripple and Noise | - 20 MHz Bandwidth | 75 mVp-p typ. |
| Capacitive Load | - single output - dual output | 3.3 Vout models: 4'400 µF max. 5 Vout models: 2'200 µF max. 9 Vout models: 1'470 µF max. 12 Vout models: 1'220 µF max. 15 Vout models: 1'000 µF max. 24 Vout models: 470 µF max. 5 / -5 Vout models: 1'000 / 1'000 µF max. 12 / -12 Vout models: 680 / 680 µF max. 15 / -15 Vout models: 440 / 440 µF max. |
| Minimum Load | | Not required |
| Temperature Coefficient | | ±0.02 %/K max. |
| Start-up Time | | 10 ms typ. / 20 ms max. |
| Short Circuit Protection | | Continuous, Automatic recovery |
| Transient Response | - Response Time | 500 µs typ. (25% Load Step) |

Safety Specifications

| | | |
|-----------|-----------------------------|---|
| Standards | - IT / Multimedia Equipment | Designed for EN 62368-1 (no certification) |
|-----------|-----------------------------|---|

EMC Specifications

| | | |
|---------------|-----------------------|--|
| EMI Emissions | - Conducted Emissions | EN 55032 class A (with external filter) EN 55032 class B (with external filter) |
| | - Radiated Emissions | EN 55032 class A (with external filter) EN 55032 class B (with external filter) |
| | | External filter proposal: www.tracopower.com/overview/tdn5wism |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

| | | |
|--------------|-----------------------------|---|
| EMS Immunity | - Electrostatic Discharge | Air: EN 61000-4-2, ±8 kV, perf. criteria A |
| | - RF Electromagnetic Field | Contact: EN 61000-4-2, ±6 kV, perf. criteria A |
| | - EFT (Burst) / Surge | EN 61000-4-3, 10 V/m, perf. criteria A |
| | | EN 61000-4-4, ±2 kV, perf. criteria A |
| | | EN 61000-4-5, ±1 kV, perf. criteria A |
| | | Ext. input component: KY 220 µF, 100 V |
| | - Conducted RF Disturbances | EN 61000-4-6, 10 Vrms, perf. criteria A |
| | - PF Magnetic Field | Continuous: EN 61000-4-8, 100 A/m, perf. criteria A |
| | | 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A |

General Specifications

| | | |
|----------------------------|---------------------------------|--|
| Relative Humidity | | 95% max. (non condensing) |
| Temperature Ranges | - Operating Temperature | -40°C to +75°C |
| | - Case Temperature | +105°C max. |
| | - Storage Temperature | -55°C to +125°C |
| Power Derating | - High Temperature | Depending on model |
| | | See application note: www.tracopower.com/overview/tdn5wism |
| Cooling System | | Natural convection (20 LFM) |
| Remote Control | - Current Controlled Remote | On: open circuit |
| | | Off: 2 to 4 mA current (no internal resistor) |
| | - Off Idle Input Current | External circuit proposal: www.tracopower.com/info/current-remote.pdf 2.5 mA max. |
| Switching Frequency | | 100 kHz min. (PFM) |
| Insulation System | | Functional Insulation |
| Isolation Test Voltage | - Input to Output, 60 s | 1'600 VDC |
| Isolation Resistance | - Input to Output, 500 VDC | 1'000 MΩ min. |
| Isolation Capacitance | - Input to Output, 100 kHz, 1 V | 50 pF max. |
| Reliability | - Calculated MTBF | 2'960'000 h (9 Vin models) |
| | | 2'280'000 h (other models) |
| | | (MIL-HDBK-217F, ground benign) |
| Moisture Sensitivity (MSL) | | Level 2 (J-STD-033C) |
| Washing Process | | According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf |
| Environment | - Vibration | MIL-STD-810F |
| | - Thermal Shock | MIL-STD-810F |
| Housing Material | | Non-conductive Plastic (UL 94 V-0 rated) |
| Base Material | | Non-conductive FR4 (UL 94 V-0 rated) |
| Potting Material | | Silicone (UL 94 V-0 rated) |
| Pin Material | | Copper |
| Pin Foundation Plating | | Nickel (2 - 3 µm) |
| Pin Surface Plating | | Tin (3 - 5 µm), matte |
| Housing Type | | Plastic Case |
| Mounting Type | | PCB Mount |
| Connection Type | | SMD (Surface-Mount Device) |
| Footprint Type | | SMD8 |
| Soldering Profile | | Lead-Free Reflow Soldering (acc. J-STD-020E) |
| | | 245°C max. (Tp) 10 s max. (tp, at Tp - 5°C) |
| | | See application note: www.tracopower.com/info/reflow-soldering.pdf |
| Weight | | 2.7 g |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

www.tracopower.com/info/reach-declaration.pdf

- RoHS Declaration

REACH SVHC list compliant

REACH Annex XVII compliant

www.tracopower.com/info/rohs-declaration.pdf

Exemptions: 7a, 7c-I

(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule))

- SCIP Reference Number


8fc743ba-ed28-4846-8011-e1e97ccb7dc7

Supporting Documents

[Overview Link](#) (for additional Documents)

www.tracopower.com/overview/tdn5wism

Outline Dimensions

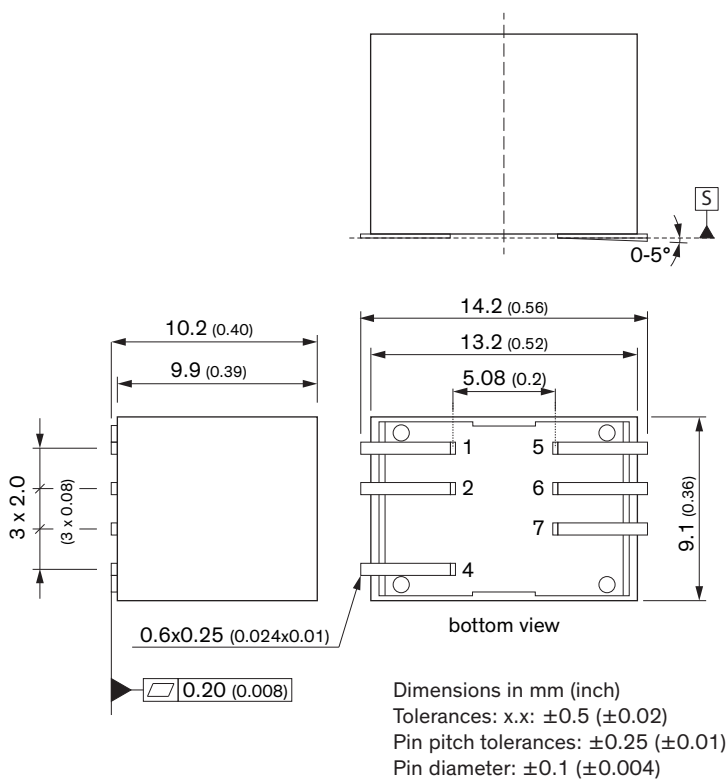

| Pinout | | |
|--------|---------------|---------------|
| Pin | Single | Dual |
| 1 | +Vin (Vcc) | +Vin (Vcc) |
| 2 | -Vin (GND) | -Vin (GND) |
| 4 | Remote On/Off | Remote On/Off |
| 5 | NC | -Vout |
| 6 | -Vout | Common |
| 7 | +Vout | +Vout |

NC: Not connected

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

