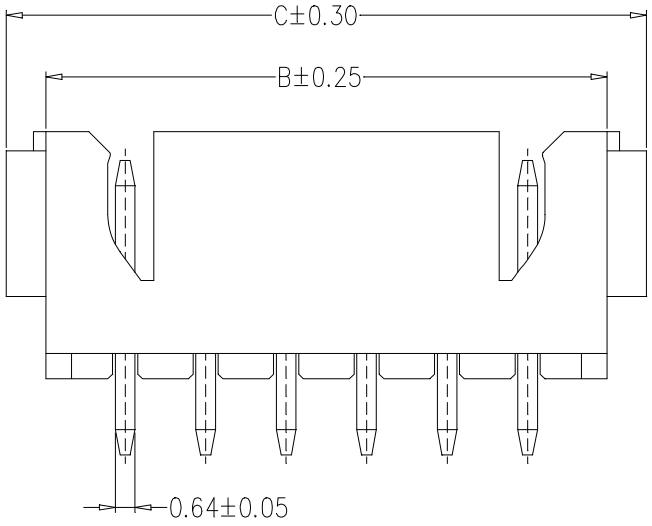

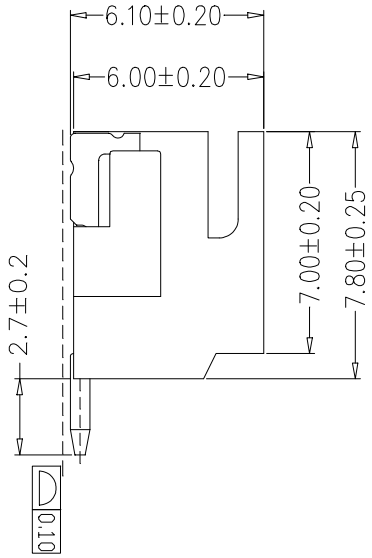

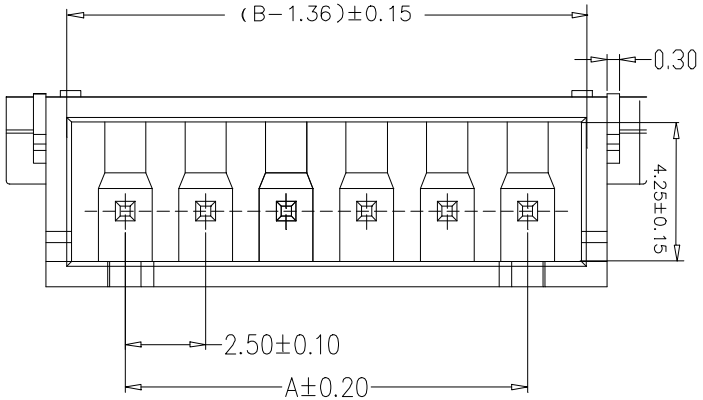

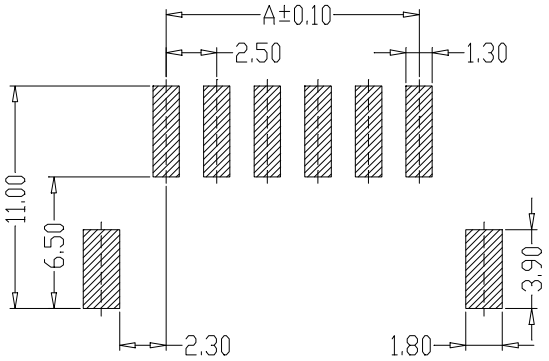

PCB LAYOUT

SPECIFICATIONS

1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃~ +85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000mΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material: Wafer LCP、PA6T UL94-V0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

Circuit	Part NO.	Dimensions mm		
		A	B	C
2	HC-XH-2AWT-X	2.50	7.50	10.00
3	HC-XH-3AWT-X	5.00	10.00	12.50
4	HC-XH-4AWT-X	7.50	12.50	15.00
5	HC-XH-5AWT-X	10.00	15.00	17.50
6	HC-XH-6AWT-X	12.50	17.50	20.00
7	HC-XH-7AWT-X	15.00	20.00	22.50
8	HC-XH-8AWT-X	17.50	22.50	25.00
9	HC-XH-9AWT-X	20.00	25.00	27.50
10	HC-XH-10AWT-X	22.50	27.50	30.00
11	HC-XH-11AWT-X	25.00	30.00	32.50
12	HC-XH-12AWT-X	27.50	32.50	35.00
13	HC-XH-13AWT-X	30.00	35.00	37.50
14	HC-XH-14AWT-X	32.50	37.50	40.00
15	HC-XH-15AWT-X	35.00	40.00	42.50
16	HC-XH-16AWT-X	37.50	42.50	45.00

Ordering Information

HC-XH - N*** - *

Pin
Type
A=直针
AW=弯针
ALT=立贴
AWT=卧贴
Colour
G=白色(加强)
W=米色
R=红色
L=蓝色
B=黑色
Y=黄色
P=紫色

			GENERL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	XH(TJC3) 卧贴	版 本 REV. A
			X.XX ±0.20	比 例 SCALE				
1	初版发行		X.XXX ±0.10	投 影 Projection		产品料号 PART NO.	HC-XH-NAWT-X	单 位 UNITS mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°			材 料 MATERIAL		页 次 SHEET 1/1