CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C 全塑无灯 带耳	MJ522288E-XX11-HXPDN1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	———	New Release	YST	2016.06.21

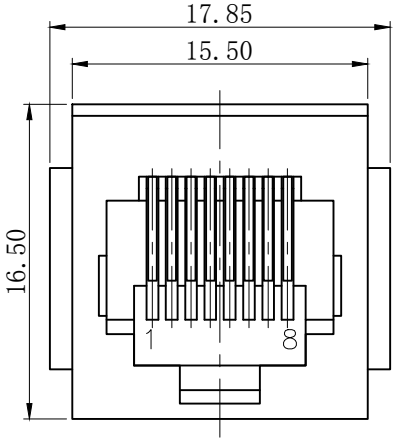

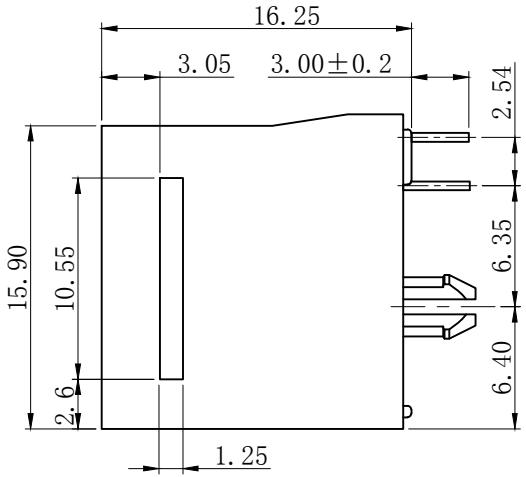

材料Material:

1. 外壳材质：PBT, PA66, PA46 (UL 94V-0)
   Housing Material: PBT, PA66, PA46 (UL 94V-0)
2. 触点材料：圆针直径0.46mm磷青铜；镀镍后镀金
   Contact Material: Round Pins-0.46mm Diameter
   Phosphor Bronze;
   Gold Plating Over Nickel

电气Electrical

1. 额定电压：交流150伏
   Voltage Rating : 150 VAC Rms
2. 额定电流：1.5安培
   Current Rating: 1.5 AMP
3. 接触电阻：最大30毫欧
   Contact Resistance: 30 Milliohms MaX
4. 绝缘电阻：直流500V下，绝缘最小500兆欧
   Insulation Resistance: 500 megohms min @500V DC
5. 绝缘耐压：交流60Hz 1000V下，1分钟
   Dielectric Withstanding
   Resistance: 1000V AC Rms 60Hz. 1Min
6. 耐久：插拔750次以上
   Durability: 750 Cycles Min
7. 工作温度：-40℃～+85℃
   Operation Temperature: -40℃～+85℃

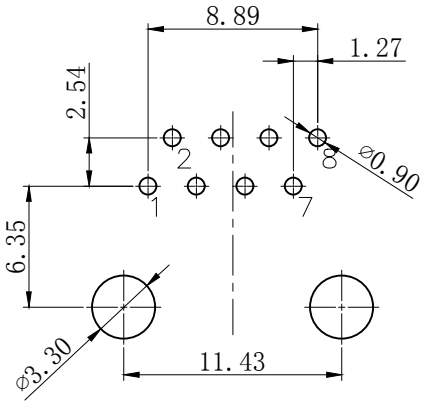

PCB LAYOUT
(Top View)

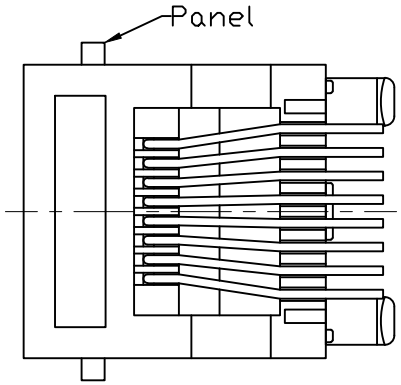

MJ522288E-XX11-HXPDN1

X	HOUSING
B	BLACK
G	GARY

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

X	MATERIALS
P	PBT
6	PA66

東莞市合陵電子有限公司
Connecter DongGuan HeLing Electronic Co.,LTD

UNLESS OTHERWISE SPECIFED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:
	SIZE: A3	PAGE:1 OF 1	REV:A01

DECIMALS:	ANGLES:	APPROVED BY	CHECKED BY	PREPARED BY
X :±0.5	X :±2°	DICK	XSY	YST
X.X :±0.3	X.X :±1°			
X.XX :±0.2		CUSTOMER COPY		